

Linear Evolution

Actuator Line



屠喜(Tony) | 商务技术总监

亿登(上海)自动化技术有限公司

Eden (shanghai) Automation Technology CO.,LTD

地址:上海市闵行区陈行路2388号5号4楼401-19室(漕河泾浦江科技广场)

Add: Room P11 Buding 5, No. 2388 Chenhang Road, MinHang district, Shanghai

手机 Mobile: (+86) 139 1826 7864

电话 Phone: 021-51029898

传真 Fax: 021-51029899

邮箱 mail:sale@edenmotion.com 网址 Web: www.edenmotion.com

General catalogue
English

www.rollon.com

When you move. We move.

Rollon S.p.A. was set up in 1975 as a manufacturer of linear motion components. Today Rollon group is a leading name in the design, production and sale of linear rails, telescopic rails and actuators, with headquarters based in Italy and offices and distributors located throughout the world. Rollon products are used in many industries with creative and efficient solutions in a wide range of applications used on a daily basis.

Solutions for linear motion



Linear Rails

- Rails with roller bearings
- Rails with caged ball bearings
- Rails with recirculating ball bearing



Telescopic Rails

- Rails with partial/total extension
- Heavy duty rails
- Rails for and automated/manual applications



Actuators

- Belt driven actuators
- Ball screw driven actuators
- Rack and pinion actuators

Core Competencies

- > Full range of linear rails, telescopic rails and actuators
- > Worldwide presence with branches and distributors
- > Fast delivery all over the world
- > Large technical know-how for applications



> Standard solutions

Wide range of products and sizes
Linear rails with roller and caged ball bearings
Heavy duty telescopic rails
Belt or ball screw driven linear actuators
Multi-axis systems



> Collaboration

International know-how in several industries
Project consultancy
Maximizing performance and cost optimization



> Customization

Special products
Research and development of new solutions
Technologies dedicated to different sectors
Optimal surface treatment




Applications

Aerospace



Railway



Logistics



Industrial



Medical



Special Vehicles



Robotics



















Packaging



Technical features overview




Reference		Section		Driving			Anticorrosion	Protection
Family	Product	Balls	Rollers	Toothed belt	Ball screw	Rack and pinion		
TECLINE		PAR						
		PAS/M PAH/M						
MODLINE		MCS MCH						
		MCR						
		TVS TVH						
		TCS TCH TECH						
		KC KCH						
		TCR TECH						
		MVS MVH						
		MTR MVR						
		ZCS ZCH						
MODLINE Z		ZCR ZCY						
		ZMC						
SYS		SYS1						
		SYS2						
PRISMATIC RAIL		203						

Reported data must be verified according to the application.

For a complete overview about technical data, please consult our catalogues at www.rollon.com.


* Longer stroke is available for jointed version


Size	Max. load capacity per carriage [N]			Max. static moment per carriage [Nm]			Max. travel speed [m/s]	Max. acceleration [m/s ²]	Repeatability accuracy [mm]	Max. travel or stroke (per system) [mm]
	F _x	F _y	F _z	M _x	M _y	M _z				
170-180-200 220-280-360	10280	44860	29900	6900	8800	13160	3,5	10	± 0,2	10800*
170-180-200 220-280-360	11600	47350	47350	7240	13100	13100	3,5	10	± 0,05	10800*
65-80-105	3300	9550	9550	156	800	800	5	50	± 0,1	10100
65-80-105	3300	1500	2950	185	580	220	5	20	± 0,1	10100
170-180 220-280	6000	18300	18300	1300	3200	3200	1	5	± 0,05	4000
100-170 180-200-220 280- 360	8000	28600	28600	4000	5500	5500	5	50	± 0,1	11480
30-50-100 150-200	2150	6500	6000	110	680	680	4	50	0,1	5600
100-170 180-200-220 280- 360	8000	25400	25400	4900	5300	5300	7	20	± 0,1	11480
80-105	3000	9550	9550	156	800	800	0,75	5	± 0,05	5150
80-105	3000	1500	2950	185	580	220	0,75	5	± 0,05	5150
60-90-100 170-220	6000	10400	12000	810	2940	4560	4	25	± 0,1	11305
60-90-100 170-180-220	6000	7620	9500	440	1900	1485	4	25	± 0,1	11300
105	250	4500	4500	260	700	700	4	25	± 0,1	2000
50-100 130-180	6100	3950	6317	548	950	668	5	25	± 0,05	7500*
200	6320	6320	6320	700	820	705	5	25	± 0,05	7500*
28-35-55	-	15000	-	-	-	-	5	50	± 0,1	7500*



ROLLON®
Linear Evolution

Tecline

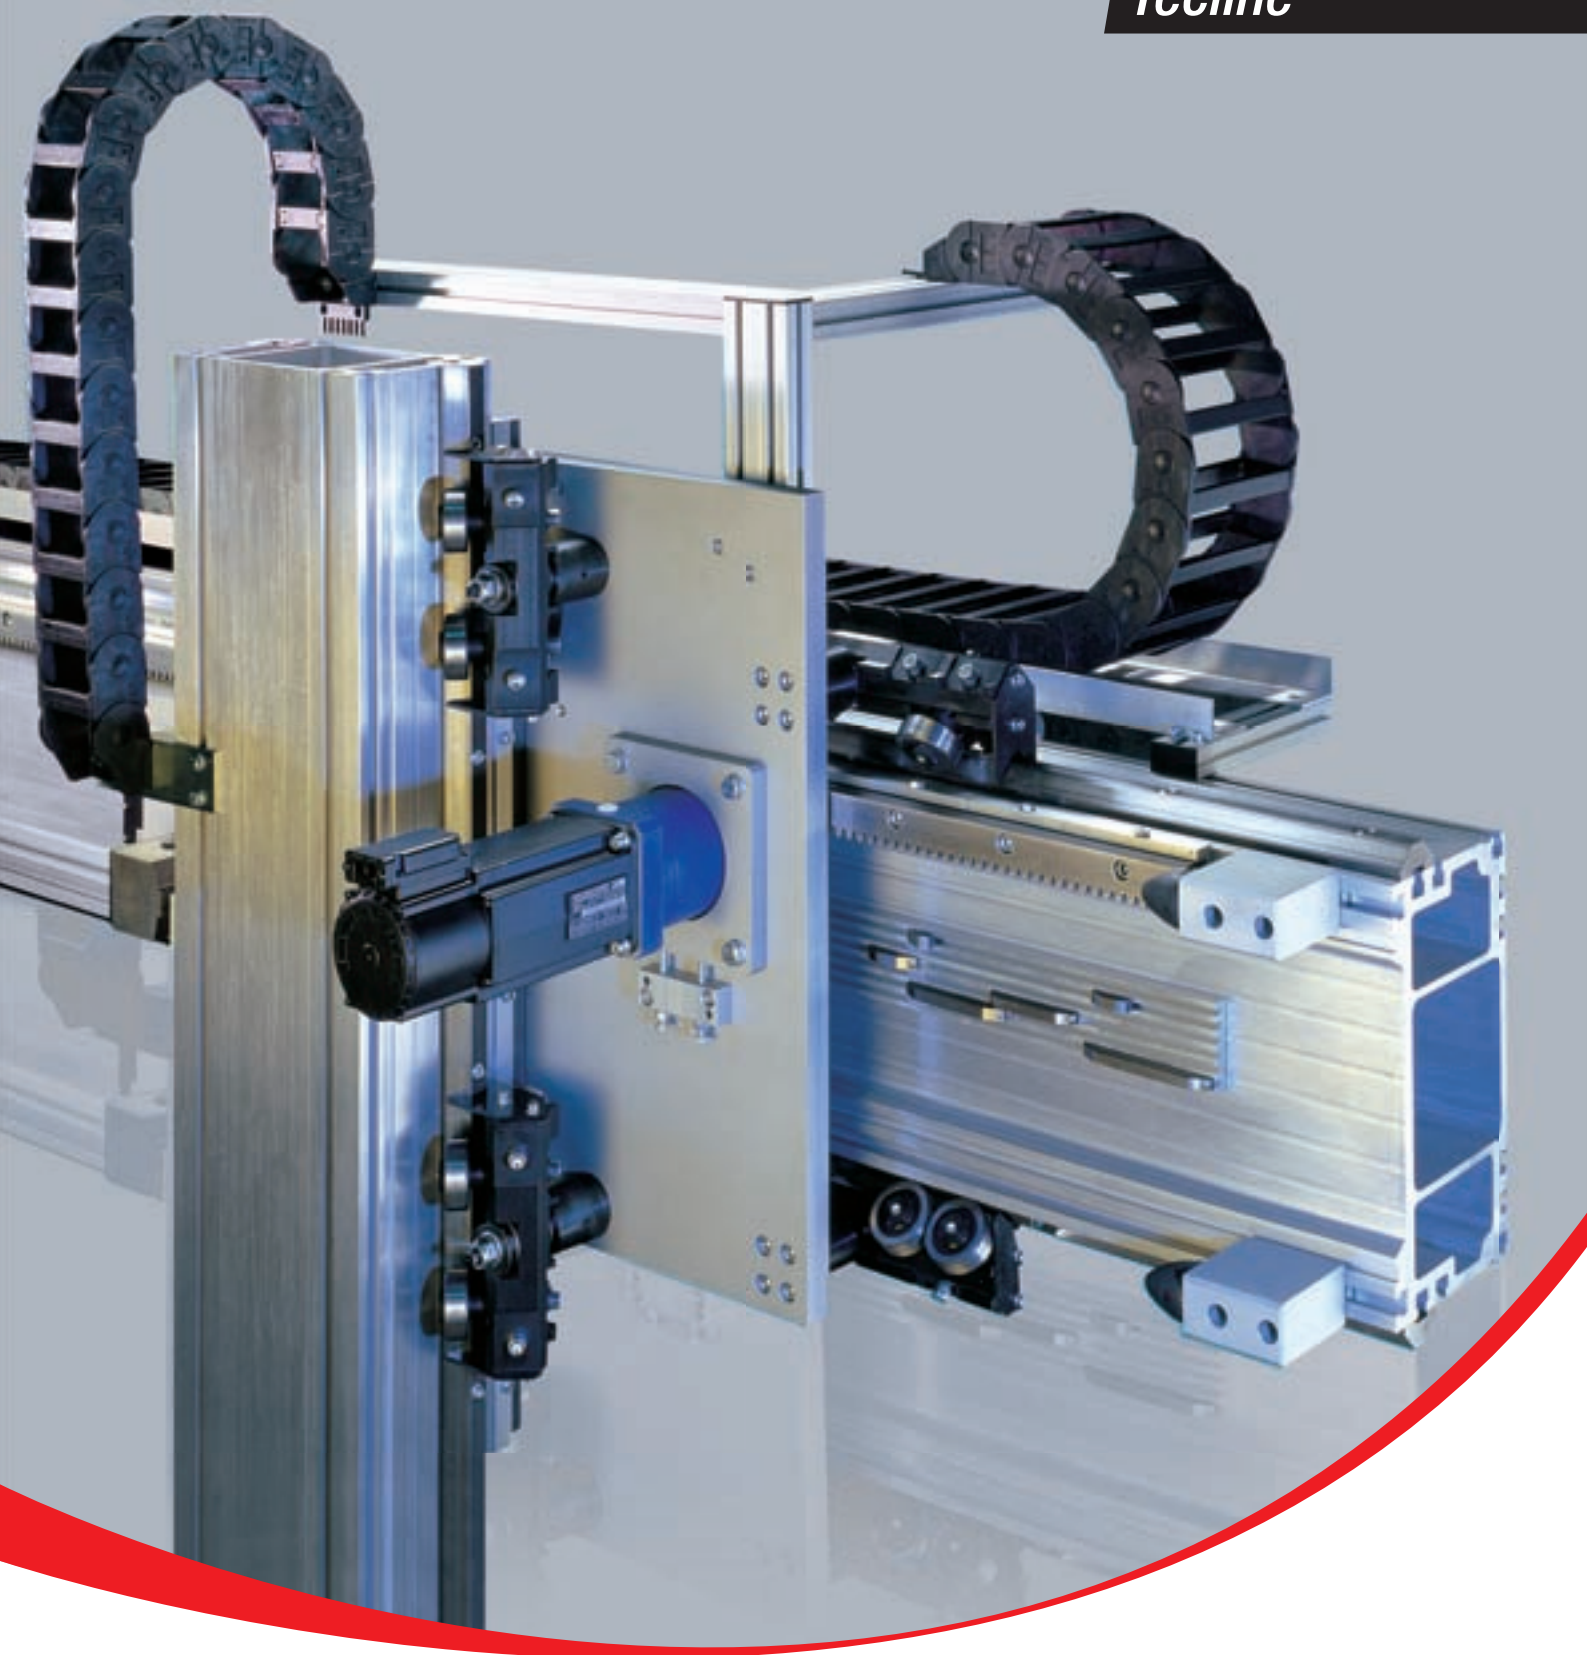

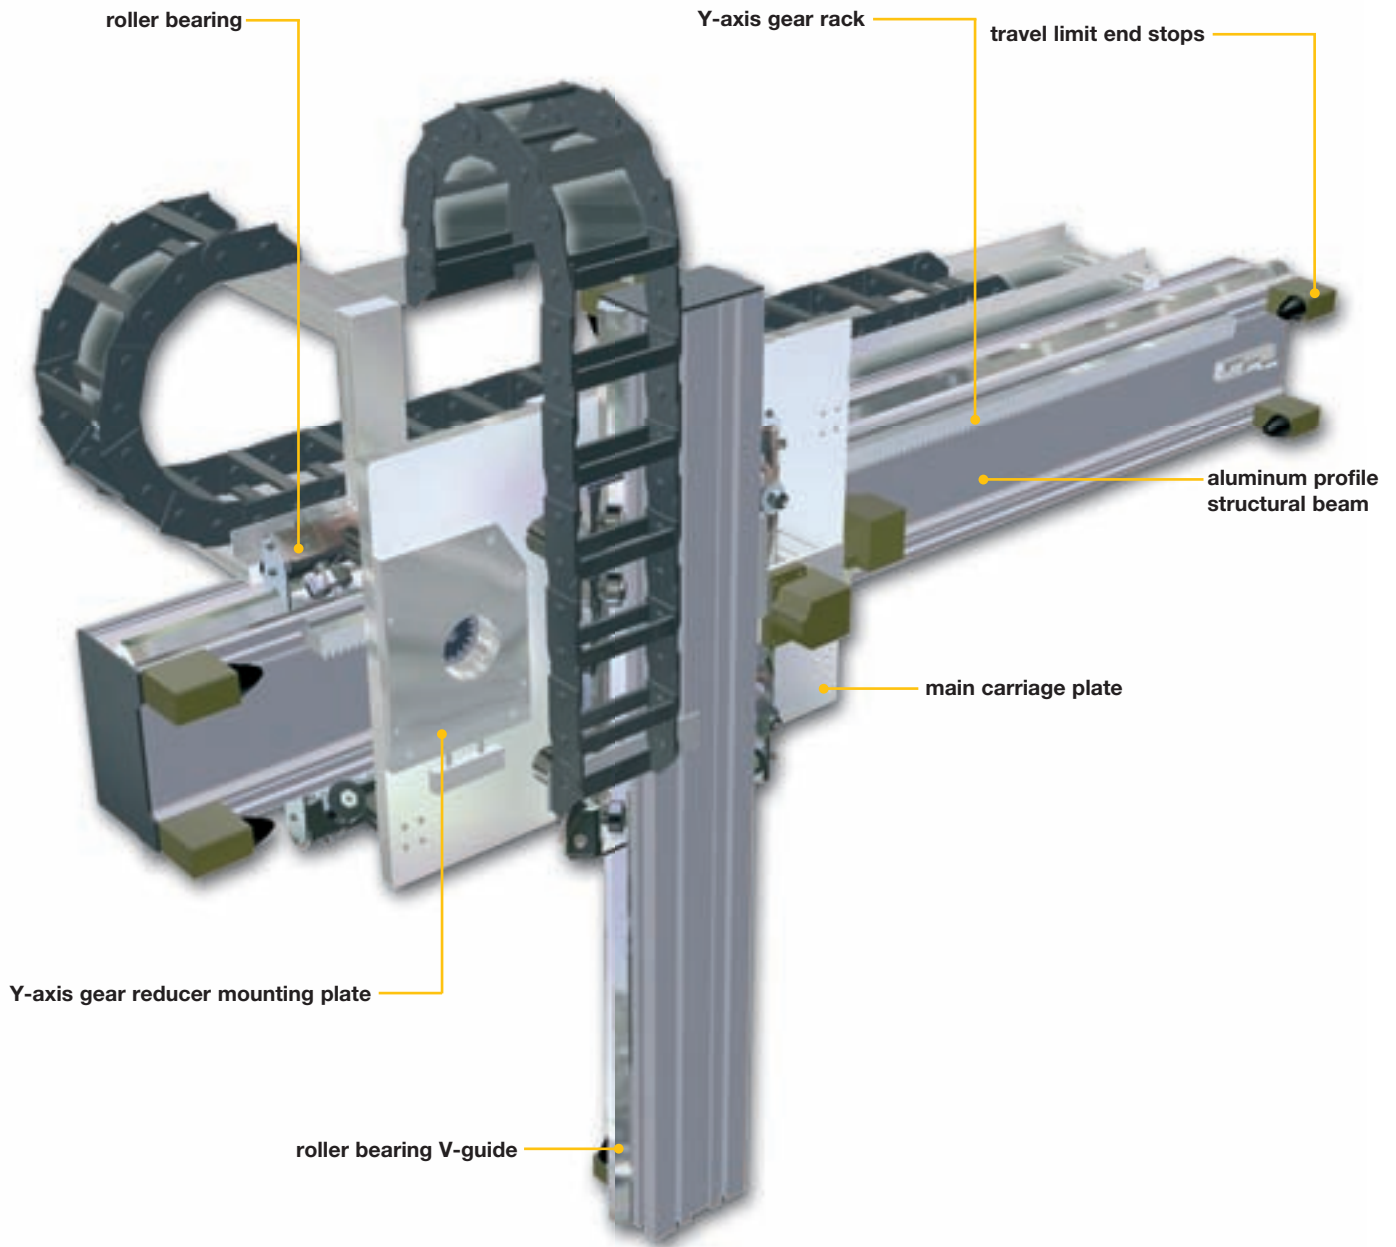

Our **tecline linear system** range is suitable for the handling of loads from 10 up to 1000 kg, by manufacturing **one or more axis systems** according to the customer **requirements**.

Our main application fields are: **robotics**, **palletization**, production **line**, **logistics** and **manufacturing machines** with Cartesian axis movements.

Our products stand out for their:

- **easy** and quick assembly
- **high quality** and **competitive** performances (profiles up to 12 m)
- **reduced** and simplified **maintenance**
- wide **range** of **integrated solutions**
- possibility of **customised solutions**
- **constant** technical **support** and CAD drawings available

Our Tecline linears strong points are:

- Solid beams obtained from aluminium alloy extruded profiles
- High-performance aluminium casting alloy plate and preset for tool assembly
- Adapting plate suitable for any commercial available gearboxes
- Fixed and oscillating roller slides, which can be adjusted through an eccentric bushing
- Without play and sealed rollers with a "for life" lubricating system
- Tempered or induction hardened and machined strong V-shaped steel guide rails
- Adjustable limit stops provided with rubber buffers
- Wide range of accessories for 3 or more axis linears

Linear systems with rack drive and components

INTRODUCTION



Construction characteristics	2
Instructions for correct assembly	3
Accuracy - Lubrication	4
Standard assembly solutions	5
Sizing template	6
Technical data sheet	7
Preliminary selection table (1-2-3 axes)	8
Special applications with standard modules	9
Assembly positions and load direction	10
Complete order code setting	11

PROFILES

SINGLE AXES



PAR 1 - PAS 1	(180)	18
PAR 2 - PASM 2	(170)	20
PAR 3 - PASM 3	(200)	22
PAR 4 - PASM 4	(200)	24
PAR 5 - PASM 5	(220)	26
PAR 6 - PASM 6	(280)	28
PAR 8 - PASM 8	(280)	30
PAR10 - PASM 10	(360)	32

DOUBLE AXES



PAR 1/05 - PAS 1/05	(180/90)	34
PAR 2/1 - PASM 2/1	(170/90)	36
PAR 3/1 - PASM 3/1	(200/100)	38
PAR 4/1 - PASM 4/1	(200/100)	40
PAR 5/2 - PASM 5/2	(220/170)	42
PAR 6/2 - PASM 6/2	(280/200)	44
PAR 6/4 - PASM 6/4	(280/200)	46
PAR 8/3 - PASM 8/3	(280/200)	48
PAR 8/6 - PASM 8/6	(280/220)	50
PAR 10/6 - PASM 10/6	(360/220)	52
PAR 10/8 - PASM 10/8	(360/280)	54

COMPONENTS

STEEL V-SHAPED GUIDE RAILS 56

PROFILES EQUIPPED WITH ASSEMBLED

V-SHAPED GUIDE RAILS (order codes) 58

RACKS 59

Adjusting plates for racks 60

PINION GEARS 60

Programmable Automatic Rack Lubrication System 61

Table for selecting maximum operating torque 61

CONNECTION SHAFTS 62

ROLLERS FOR V-SHAPED GUIDE RAILS 28.6X11 AND 35X16 63

ROLLER SLIDES 64

Assembly Studs 69

Order code table for roller slides and pins 71

ANTI-DROP SAFETY SYSTEM 72

Safety lock-pin (shock absorbers) 72

ACCESSORIES



PVS for small and medium profiles	73
Capitalize STATYCA, VALYDA LOGYCA for brand recognition	75
Profile fastening brackets	75
Assembly brackets	76
End caps for profiles	78
Cams and cam-holders for micro-switches	79
Threaded inserts for small and medium profiles	80
Threaded inserts for load-bearing profiles	81
Machining code table	83
Index	84

This document replaces all previous editions.
Due to the constant progress of our research we reserve the right to modify drawings or features without notice.
No part of this catalogue may be reproduced without written permission of the copyright owner.
All rights reserved. This catalogue has been accurately checked before publishing.
However, we disclaim all responsibility in case of errors and omissions.



Certified company UNI EN ISO
9001:2008 e ISO14001:2004

Edition 02-2015
Rev. 14/02/2015

Construction characteristics

Multiple-axis linear modules with rack drive

TECLINE linear systems are designed for ROBOTS with one, two or three CARTESIAN AXES and comprise Tecno Center linear modules with rack drive, in different sizes depending on the load to be translated. Modules with rack drive are suitable for transfer and positioning systems with an extremely low repeatability error and/or for dynamic performance and heavy loads.

They can be equipped / supplied with gearboxes, motors and drivers/drives upon request.

Whatever the application, the configuration can be adapted using the complete order code, within an extensive range of components (energy-chains, guides, micro-switches, lubrication units, etc.) and accessories.
Our technical dept. is available to provide assistance with code setting.

Beams

Manufactured with Tecno Center s extruded and anodised (*) profiles, made of hardened and tempered aluminium alloy Al Mg Si 0.5, quality F25, Rm 245 N/mm, tolerance according to UNI EN 755-9. Profiles are specifically designed by Tecno Center to create rigid and light structures, suitable for manufacturing linear transfer machines. The guide and rack housings on modules equipped with ball roller slides (PASM family) are milled.

(*) Valyda and Logyca profiles are anodised up to 12 m. Pratyca and Solyda are anodised upon request

Modules can be supplied with head-pieced beams, upon request

Plates

Manufactured with flattened extra-fine rolled sections made of high-performance casting alloy (tensile strength, Rm = 290 MPa, HB = 77). Standard plates can be machined according to drawings (code D).

V-shaped guide rails, PAR version

Made of specially treated high-carbon steel. Standard versions include both hardened and tempered and surface-hardened guides: section 28.6x11, 35x16 and 55x25 (max. length 5,900 mm – 28.6x11, max. length 3,980 mm). Joints bevel cut at an angle of 20°.

Roller slides, PAR version

Body in aluminium alloy G AL SI 91 hardened and tempered according to EN AB 46400, rollers with double rows of angular contact ball bearings, backlash-free, long life lubrication: Ø 30, Ø 40, Ø 52, Ø 62 mm rollers. Adjustable tolerance between rollers and guides. Complete with wiper scraper.

Caged ball roller slides and guide rails, PASM version

Systems are supplied with caged ball roller slides made by leading manufacturers. The cage included in the slides has two purposes: it much the friction between the guide rail and the slide and prolongs their service life, and allows lubrication refills to be performed must less running. The modules and guide rails are suitable for composing sections more than 10 m long. The assembled guide rails have a run parallelism of less than 0.030 mm. The assembly of caged ball roller slides and guide rails normally also involves the machining of the related seat in the profile (code M).

Racks / Toothed pinions

Racks with helical teeth, made of induction-hardened steel and hardened and tempered alloy steel, are available with three different cross-sections: 25x25, 30x30, 40x40 mm.

PAR versions with guide rails and roller slides, assembled with milled, KTD induction-hardened racks with pinions in high-performance tempered and surface-hardened steel (ND). PASM versions with guide rails and caged ball roller slides, are normally assembled with KSD racks and pinions in hardened and tempered RD steel, induction-hardened and fully ground. High-performance KRD racks are available upon request (Rs>900 MPa): hardened and tempered, induction-hardened, and fully ground (page 59). With RD pinions, KRD racks and continuous lubrication, speeds of up to 5 m/s can be reached.

Stop bumpers

Important: the rubber stop bumpers provided with standard linear models are suitable and regarded as static limit switches. For special needs, such as safety stops if the drive breaks, please specify loads, dynamics, details and discuss the use of specific parts, accessories and devices (reinforced plates and attachments - shock absorbers, safety and/or anti-drop devices, etc.) with our technical dept.

Energy chains or accessories


Energy chains are provided upon request, together with a wide range of accessories. Adjustable brackets and supports are included. Standard sizes are those shown in the catalogue. Energy chains and accessories can be added using the order code on page 11.

Anti-oxidation parts and coatings

Rack modules with anti-oxidation coating are available upon request. Materials with special coatings and lubrication are selected according to the environment of use (food industry, health sector, marine environment, exposure to weather, etc.)

A - Features of the system with roller slides

The translation system consists of a plate to which two roller slides with concentric pins and two with eccentric pins are fixed. The eccentric pins help to adjust the tolerance between the roller slide and the sliding track. Check that the angular position of the rollers is such that they can support the max. working load. See page 65 and 71.

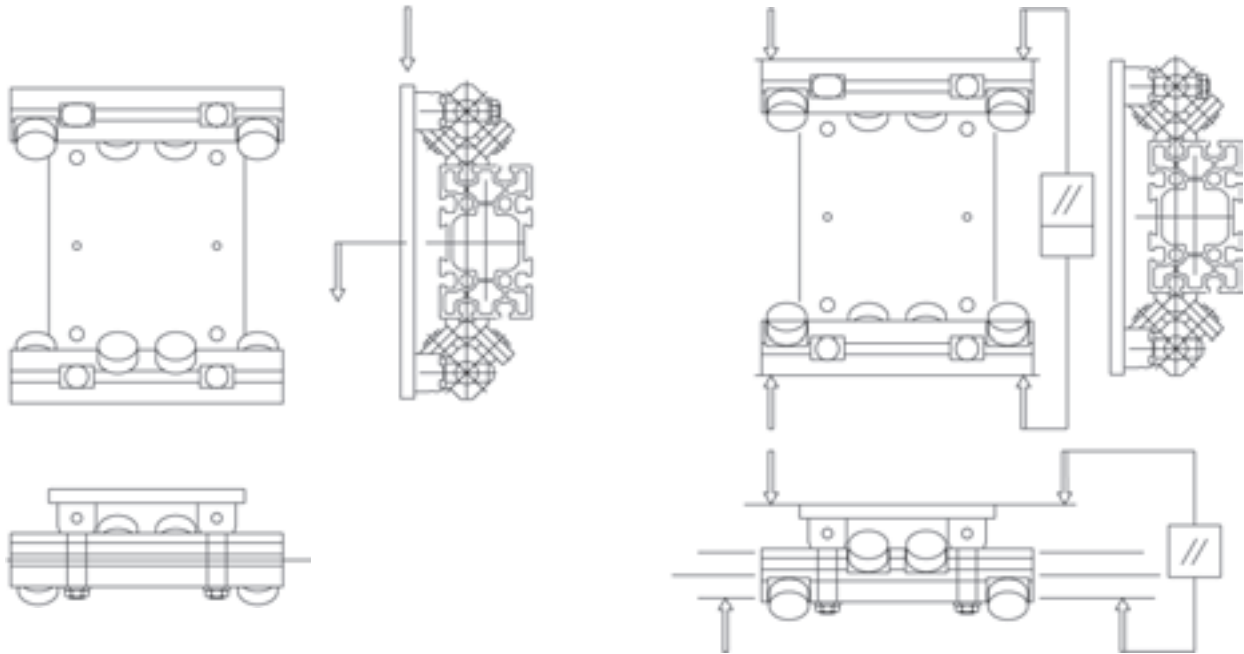

A - Assembly and adjustment of the roller slide.

Check the sense of direction of the roller slide as shown in point A. Check the alignment. Bring the roller slides with concentric pin into contact with the sliding tracks. Adjust the eccentric pins until there is no clearance and the carriage can slide easily along the bar.

IMPORTANT: overloading is easily achieved: this may result in premature wear.

NOTE: always keep friction low: if friction is high, loosen and repeat the adjustment.

No adjustments are required with guide rails and recirculating caged ball linear guides. For high-precision applications, please order low-backlash roller slides.

B - Alignment

All profile anchor supports must be perfectly aligned (with axes side by side: perfectly parallel and coplanar).

C - Assembly of racks

The axis of the teeth and the guide rails must be parallel within tight tolerances. In the PASM version, the rack seat and the seat of the guide rails for the caged ball roller slide guides are machined together to ensure the correct assembly and positioning accuracy of the axis.

D - Tightening specifications and precautions

Make sure all parts are locked with the appropriate screws and with the right tightening torques.

E - Gearboxes, motors and drives

Supplied upon request. The use of right-angle reduction gears with hollow shaft and key is recommended. With this configuration the gearbox adapting plate is complete with shaft, pinion and step bearing. Otherwise, upon request, the adapting plate can be machined according to customer specifications and the pinion, if obtainable from the standard version. Backlash between the pinion and rack is only adjusted if the gearbox is supplied (or available).

Accuracy


The accuracy of this system is based on the tolerance of:

1. guide rails
2. rolling parts
3. transmission chain (e.g. rack and pinion)

V-shaped guide rails

Made of specially treated high-carbon steel alloy. Their accuracy is shown in the figure below and they are supplied in the following versions: tempered and hardened only, or induction-hardened with a special grinding process, or tempered and hardened.

Hardness: tempered min. 58HRC; tempered and hardened: 240 HB uHB

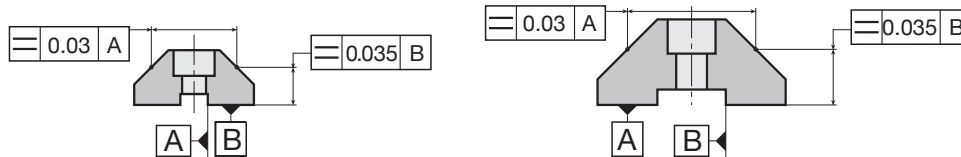

Rolling parts

Rollers with double rows of angular contact ball bearings to absorb axial force have a low friction coefficient (± 0.03) and are complete with sliding sealing rings.

Roller tolerance and radial backlash are in line with DIN 620 parts 2 and 3 (except for the convex external ring $R=500$ mm), while the load and calculation coefficients comply with DIN ISO 281 and with DIN ISO 76.

Guide rails and caged ball roller slides

As a general rule, these are generally supplied in “normal” accuracy classes. Thus, they are suitable to ensure the appropriate combination of positioning precision, stiffness and self-alignment required for standard industrial applications.

Higher levels of accuracy with low backlash are available upon request.

Lubrication

Rack and pinion

These parts must be lubricated regularly with a gear grease (for high working pressures).

An automatic, programmable system is available to ensure correct lubrication of the teeth (page 61).

The tangential force and torque values shown in the table on page 61 refer to properly lubricated racks.

Rollers and roller slides

Roller slides and V-shaped rollers are provided with a permanent lubrication system. If properly used, this eliminates the need for any further maintenance, also considering the average life of handling devices.








Do not use solvents to clean rollers or roller slides, as you could unintentionally remove the grease lubricating coat applied to the rolling elements during assembly. However, grease may be added slowly to lithium soap according to DIN 51825 - K3N.

V-shaped guide rails

If properly assembled, with the felt scraper in place, these guides do not require any lubrication, which could attract impurities and have negative consequences.


Guide rails and caged ball roller slides

Due to the cage keeping the ball bearings apart, these units are regarded as permanently lubricated; considering the average life of handling devices, no maintenance is needed before 30,000 Km. For applications where dynamic performance is required, our technical dept. will consider the need for special seals or suitable tanks or lubrication systems.

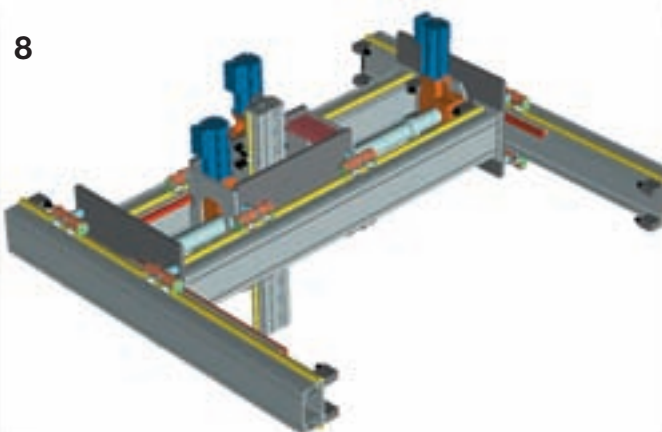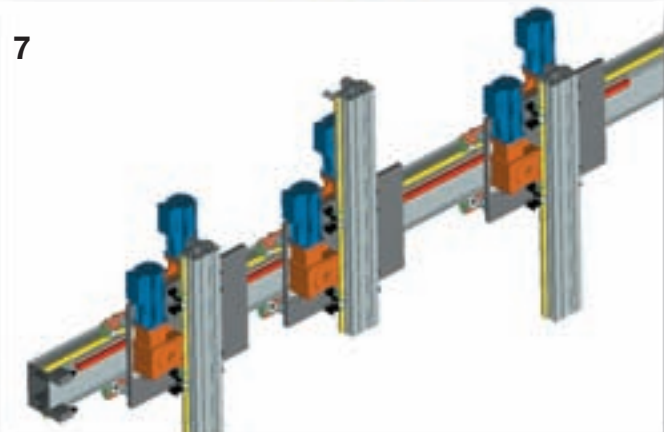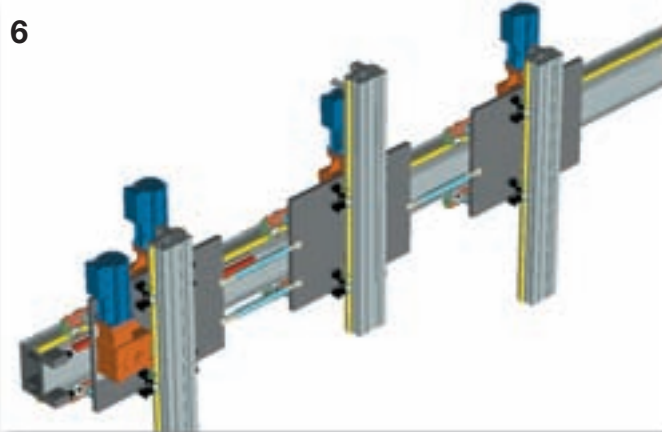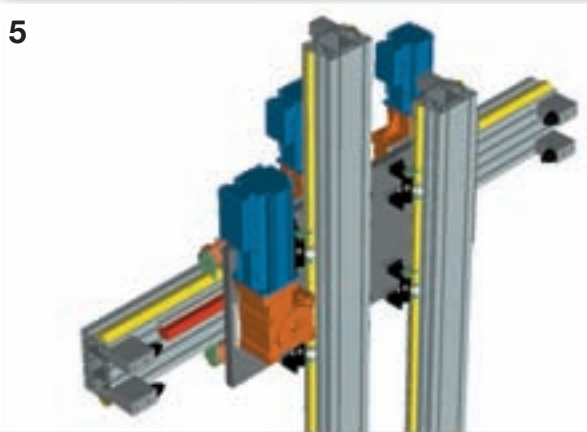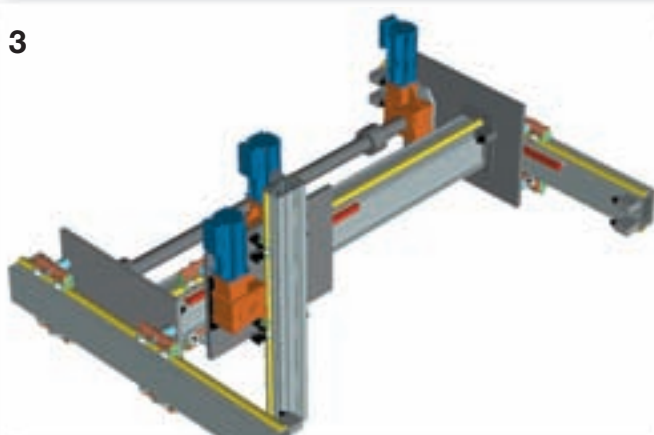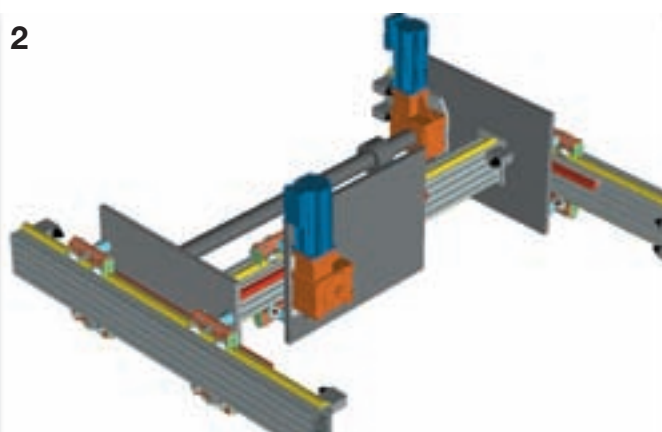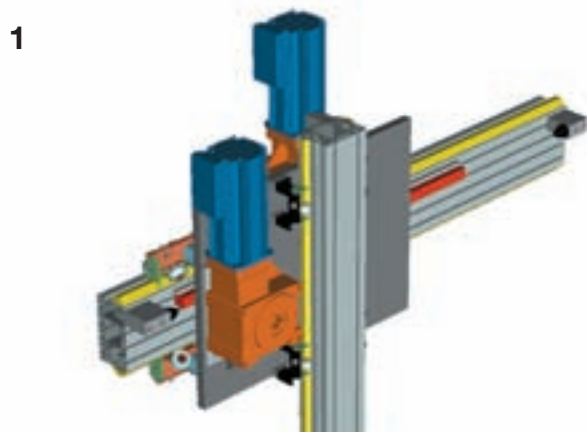

Sizing template

Our **technical department** is available to check sizing calculations. Please fill in the form with all the necessary data and send it to our technical dept., which will recommend the most suitable size according to the forces applied and precision required.

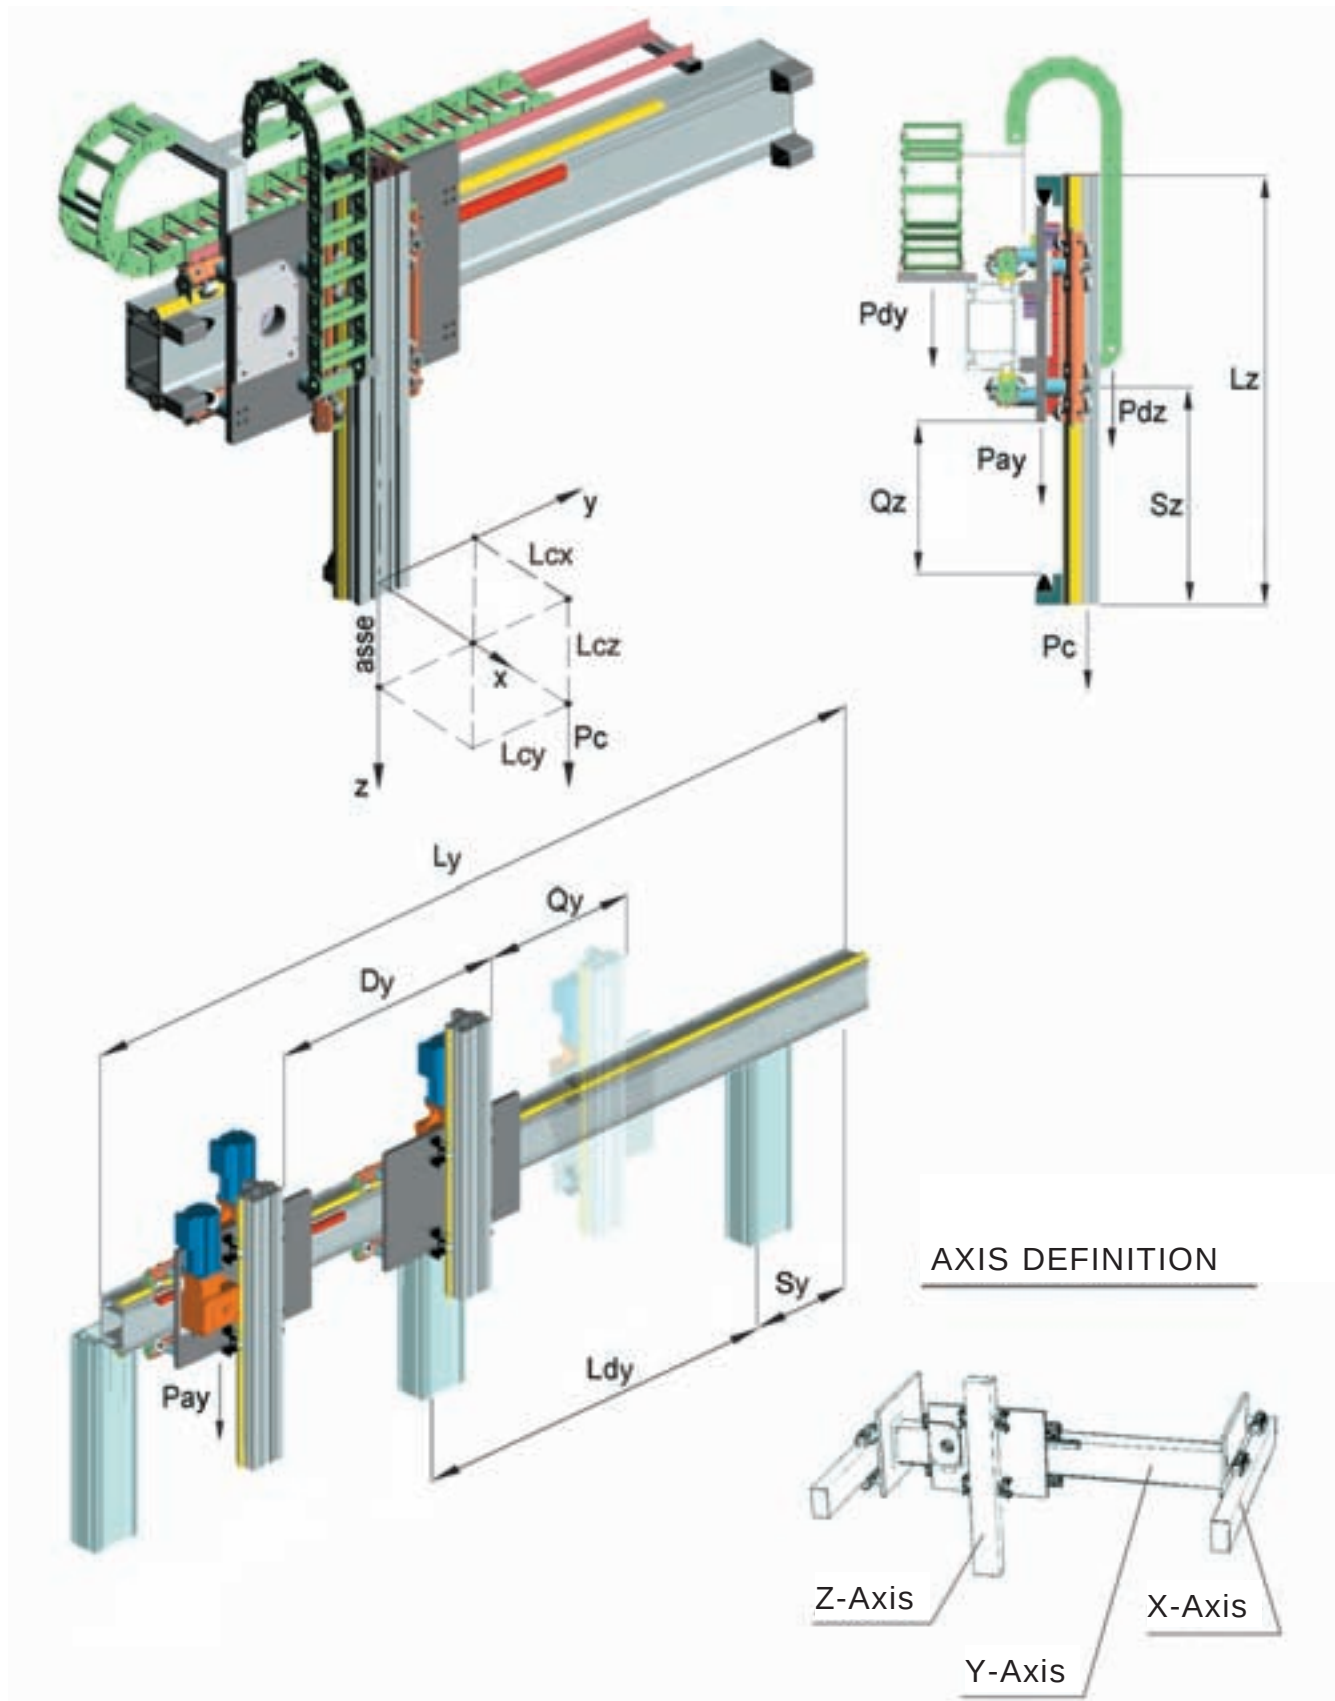

For a correct design of the system, please fill the form below and send it to our technical dept.

Date:Request n°.:

Filled by:

Company:

Address:

Tel.:Fax:

E-mail:

ROLLON S.p.A. - ITALY

Via Trieste 26

I-20871 Vimercate (MB)

Phone: (+39) 039 62 59 1

www.rollon.it - infocom@rollon.it

SIZING TEMPLATE

required
data

optional
data

Assembly solutions (see page 5) no.....

Total length

Total working load including EOAT (add Z axis for Y and X axes)

Equipment weight on carriage (gearbox, cylinder, OPTIONAL)

Weight distributed on the beam (energy chain)

Beam supports

Max. projection (any cantilever, the largest)

Span (largest)

Offset load's centre of gravity (X-axis)

Offset load's centre of gravity (Y-axis)

Offset load's centre of gravity (Z-axis)

Additional force, if any

Possible distance between the carriages (see solutions 6 - 7 on page 5)

Transmission performance

Assembly: vertical= 90° - slope = 30°, 45°, 60° - horizontal = 0°

Stroke

Speed

Acceleration

Cycle time

Positioning accuracy

Repeatability

Work environment (temperature and cleanliness)

Daily working cycles


Z-Axis

Y-Axis


X-Axis

Lz		Ly		Lx		[mm]
Pc		Py		Px		[kg]
		Pay		Pax		[kg]
Pdz		Pdy		Pdx		[kg/m]
		n°		n°		
Sz		Sy		Sx		[mm]
		Ldy		Ldx		[mm]
Lcx						[mm]
Lcy						[mm]
Lcz						[mm]
F						[N]
		Dy		Dx		[mm]
η						
α°						
Qz		Qy		Qx		[mm]
Vz		Vy		Vx		[m/s]
Az		Ay		Ax		[m/s²]
Tz		Ty		Tx		[s]
+/-						
+/-						[mm]
N°						

Working cycle

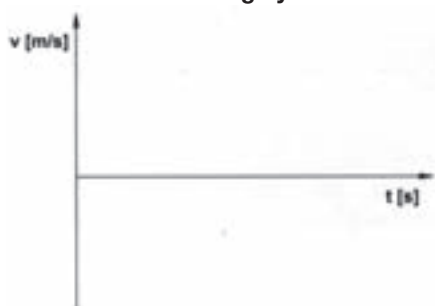

Working cycle example

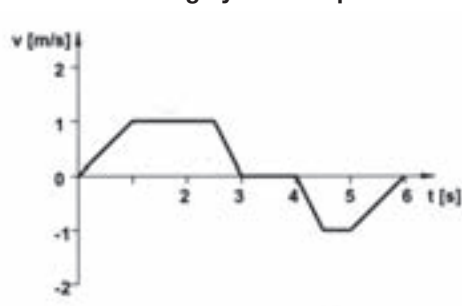

Remarks:

.....

.....

.....

.....


Preliminary selection table (1-2-3 axes)

These tables are useful for making a preliminary selection with load applied in a central position with respect to the plate or profile axis. Z axis length is < 1,600 mm.

Deflection is computed assuming continuous beams having the same span and concentrated static loads.

In the following table, select the appropriate X axes according to the load.

	PA	2X	3X	4X	5X	6X	8X	10X	LC
	Deflection								
Max load capacity [kg.]									
50		1,4							5000
100		1,8							5000
200		2,7	1,8						5000
300			2,3	2,7					5000
400				3,3	2,4				5000
500					2,8	1,8			5000
600						2			6000
800							2,5	1,8	6000
1000								2,1	7000




LC

N.B. per i PA 8X e 10X verticale compensare il carico.

In the following table, select the appropriate Y-X axes according to the load.

	PA	2/1	3/1	4/1	5/2	6/2	8/3	6/4	8/6	10/6	10/8	LC
	Deflection											
Max load capacity [kg.]												
50		1,9										5000
100		2,4	1,7	2	1,6							5000
200					2,2	0,8	0,8					5000
300						1,6	1,6	1,6				6000
400								1,9	2	0,9		6000
500									2,2	1		6000
600									2,5	1,2	1,2	6000
800											2,2	7000



LC

In the following table, select the appropriate X and Y-Z axes according to the load.

Y-Z-axes												
	PA	PA load [kg.]	2/1	3/1	4/1	5/2	6/2	8/3	6/4	8/6	10/6	10/8
X-axis	PA		100	100	100	200	200	300	400	600	600	700
	2X (200)											
	3X (300)											
	4X (400)											
	5X (500)											
	6X (600)											
	8X (800)											
	10X (1000)											

NB: The choice of X axis is based upon the actual load, the supporting points, max. deflection and the total weight of the Y-Z axes.

EXAMPLE: selection of 3-axis system with roller slides

(Please see page 10 and the system pages for the nomenclature)

DATA: Total working load 300 kg, X axis stroke: 5,000 mm, Y axis stroke: 4,000 mm, Z axis stroke: 2,000 mm, support points: 2

By analysing the table of Y-Z axes based on the working load (Pc), profile length (Ly) and deflection, the selection falls on one PA 8/3 (load 300 kg.) system.

Check: $P_{eff} = P_{max} - (Lz - 1,600)/1,000 \cdot q_z = 300 - (2,900 - 1,600)/1,000 \cdot 35 = 254.5 \text{ kg.} < \text{di } 300 \text{ kg (not sufficient).}$

Therefore select the larger size PA 6/4 (max. load capacity 400 kg.)

$M_{totY+Z} \text{ PA } 6/4 = M_{base} + (q_y \cdot \text{stroke}_Y + q_z \cdot \text{stroke}_Z)/1000 + P_c = 244 + (66 \cdot 4,000 + 48 \cdot 2,000)/1,000 + 300 = 904 \text{ kg.}$

$P_{totX} = M_{tot} \text{ PA } 6/4 (Y+Z) \cdot 0.66 = 596.6 \text{ kg.}$




$Lx = \text{stroke}_x + 1,200 \text{ approx.} = 5,000 + 1,200 = 6,200 \text{ mm}$

By analyzing the table of X axes based on the load (P_{totX}) profile length (Lx) and deflection, it is possible to select 2 linear axes PA 6X

Chosen composition: n°1 PA 6/4 + n° 2 PA 6X

Perform a final analysis by computing the deflection based on the actual size of the spans.

Our technical dept. is at your complete disposal to help you examine the most suitable applications for your requirements and help you ...with motor and drive sizing for the whole project.

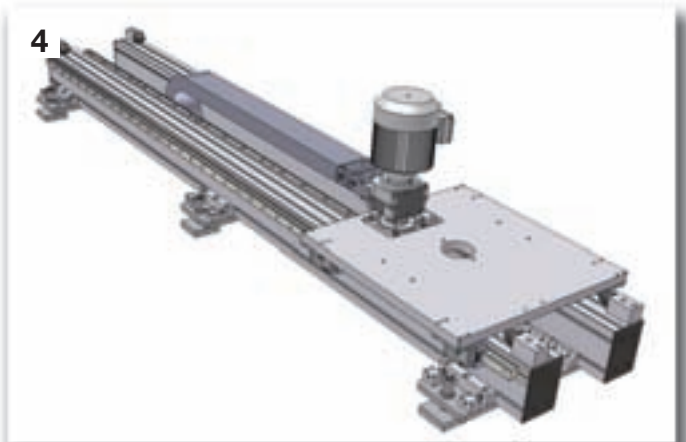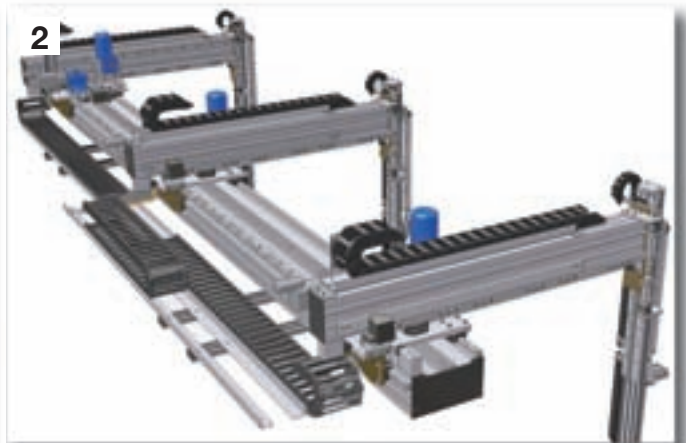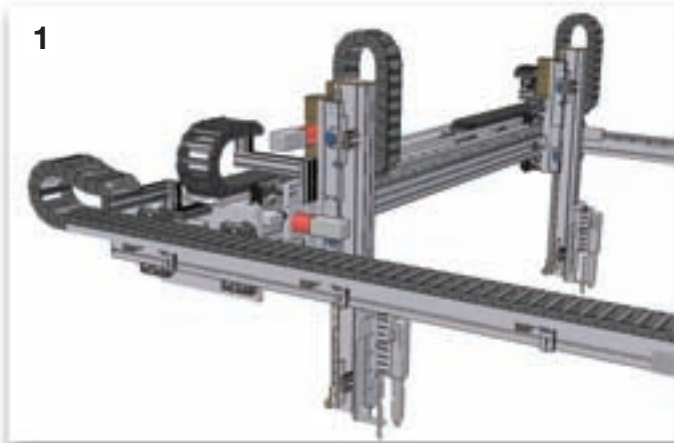

- 1/5** Pick and place system with twin vertical axis and rack and pinion drive for the production of panels in the construction industry.
- 2** Pipe handling system in welding plant.
- 3/6** Multicarriage handling system with separate rack and pinion drive for each X and Y axis.
- 4** Shuttle system for 6-axis of SCARA robot.
- 7** Column lift - load 100 kg - stroke 17 m.

Assembly positions and load direction

For single-axis roller versions

A

B

C

D

E

F

KEY:

Direction of load

Linear axis support

Axis orientation position X - Y - Z:

Simplified code setting of the module


EXAMPLE	P	A	S	M	5	/	2	/	mm/mm/	...
SERIES	P									
SLIDE	A= rack									
DRIVE	R= Roller slides S= caged ball linear guides - high performance									
PROFILE MACHINING	M= profile with machined guide plane and rack plane									
SIZE OF X-AXIS	See catalog from page 18 to page 55									
SIZE OF Z-AXIS	See catalogue from page 18 to page 55 "X"= Z-axis not provided									
STROKE / Length	"mm" = X-axis / Y-axis / Z-axis									
ACCESSORY CODES	Various accessory codes									

Tecline


- The standard system includes all components illustrated in the drawings (profiles, gearbox plate, energy chain support, profile end caps, safety stops), except the energy chain.
- Pinion, reduction units, gearboxes and compensating cylinders supplied by the customer can be fitted upon request.
- Machining to specifications (drilling, hollowing, spot-facing, etc.) on the free surfaces of the plates.
- Customized applications (optional: systems with several plates, machining to drawing specifications, structural inspections for special loads, Cartesian robots with three or more axes, etc.)

Profile specifications (see machining code table on page 83)


Small profiles




MB 1-1 (30x30)		
Weight	1.2	kg/m
Max. length	6	m
Moment of inertia Ix	39,000	mm ⁴
Moment of inertia Iy	39,000	mm ⁴

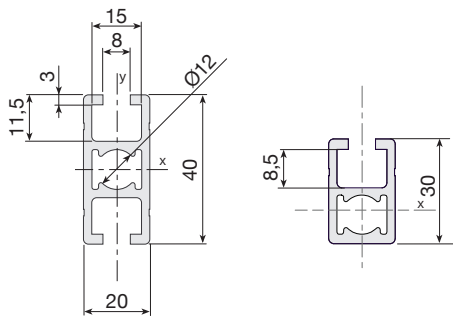


	E01-7 (20x40)	E01-8 (20x30)	
Weight	1.3	0.75	kg/m
Max length	6	6	m
Moment of inertia Ix	22,000	24,600	mm ⁴
Moment of inertia Iy	46,000	15,700	mm ⁴

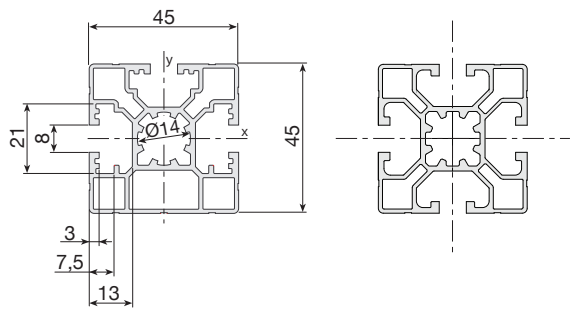


	E01-6 (45x45) light	E01-11	
Weight	1.4	1.4	kg/m
Max. length	6	6	m
Moment of inertia Ix	137,000	103,500	mm ⁴
Moment of inertia Iy	138,000	103,500	mm ⁴




E 01-1 (45x45)		
Weight	2	kg/m
Max. length	6	m
Moment of inertia Ix	155,000	mm ⁴
Moment of inertia Iy	155,000	mm ⁴

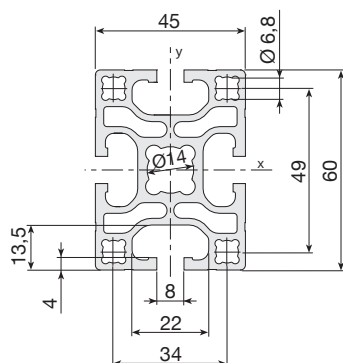**E 01-2 (45x60)**



Weight	2.7	kg/m
Max. length	6	m
Moment of inertia I _x	340,000	mm ⁴
Moment of inertia I _y	208,000	mm ⁴

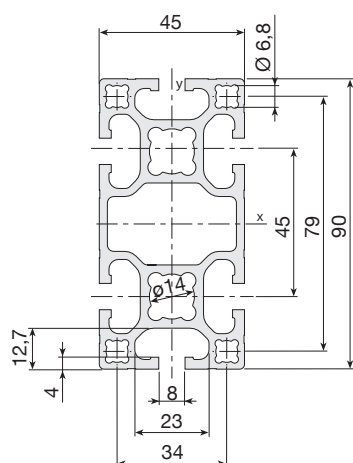**E 01-3 (45x90)**

Weight	3.5	kg/m
Max. length	6	m
Moment of inertia I _x	1,055,000	mm ⁴
Moment of inertia I _y	284,000	mm ⁴


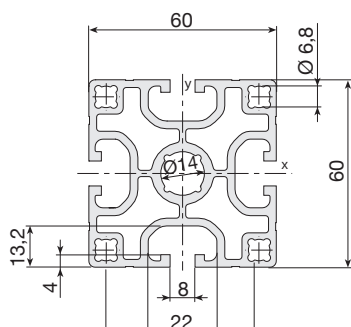
**F 01-1 (60x60)**

Weight	3.6	kg/m
Max. length	6	m
Moment of inertia I _x	466,600	mm ⁴
Moment of inertia I _y	466,600	mm ⁴

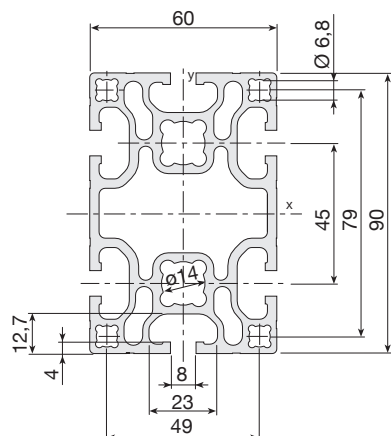**F 01-2 (60x90)**



Weight	4.6	kg/m
Max. length	6	m
Moment of inertia I _x	1,450,500	mm ⁴
Moment of inertia I _y	641,600	mm ⁴

Medium profiles

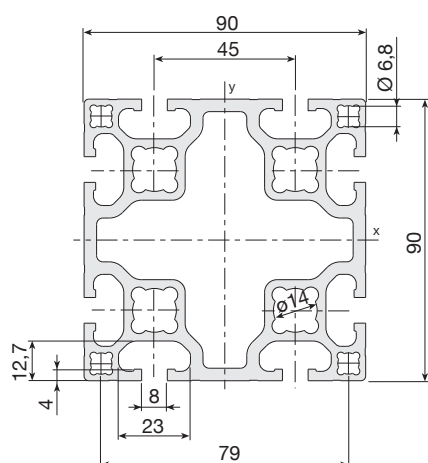


E 01-4 (90x90)

Weight	6	kg/m
Max. length	6	m
Moment of inertia I _x	2,027,000	mm ⁴
Moment of inertia I _y	2,027,000	mm ⁴
Polar moment of inertia I _z	1,100,000	mm ⁴
Bending section modulus W _x	45,040	mm ³
Bending section modulus W _y	45,040	mm ³

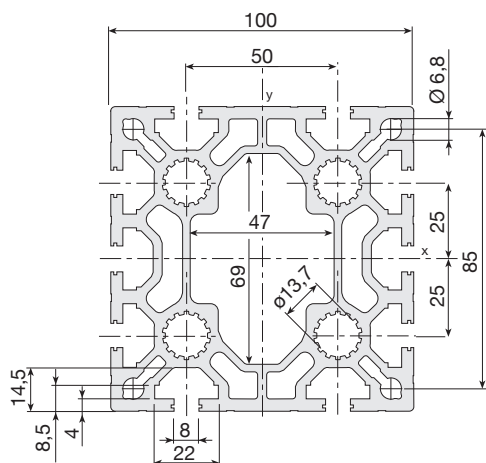



MA 1-5 (100x100)

Weight	9.5	kg/m
Max. length	6	m
Moment of inertia I _x	3,800,000	mm ⁴
Moment of inertia I _y	3,650,000	mm ⁴
Polar moment of inertia I _z	1,900,000	mm ⁴
Bending section modulus W _x	76,000	mm ³
Bending section modulus W _y	73,000	mm ³


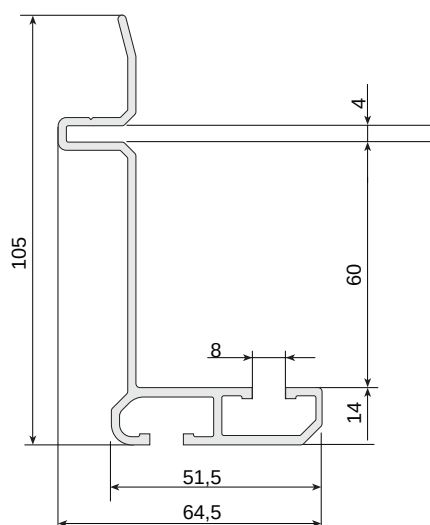


7400568 energy chain support profile

Weight	1.3	kg/m
Available length	6	m

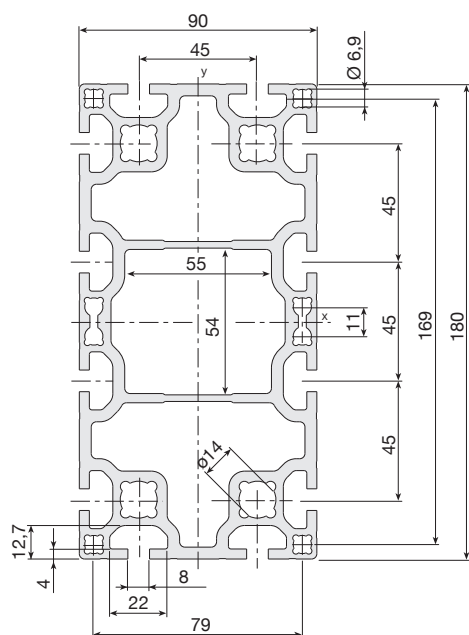
**E 01-5 (90x180)**

Weight	approx. 12	kg/m
Max. length	8	m
Moment of inertia I _x	15,180,000	mm ⁴
Moment of inertia I _y	4,420,000	mm ⁴
Polar moment of inertia I _z	4,400,000	mm ⁴
Bending section modulus W _x	168,670	mm ³
Bending section modulus W _y	98,220	mm ³

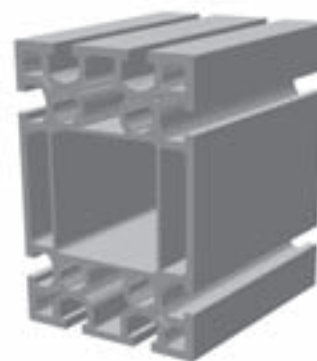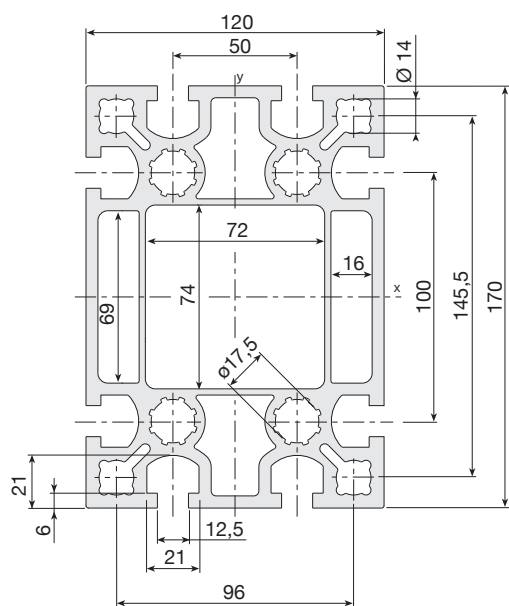
Load bearing profiles**STATYCA (120x170)**



code 202.1753

Weight	17	kg/m
Max. length	6	m
Moment of inertia I _x	20,360,000	mm ⁴
Moment of inertia I _y	10,200,000	mm ⁴
Polar moment of inertia I _z	8,460,000	mm ⁴
Bending section modulus W _x	239,500	mm ³
Bending section modulus W _y	170,000	mm ³


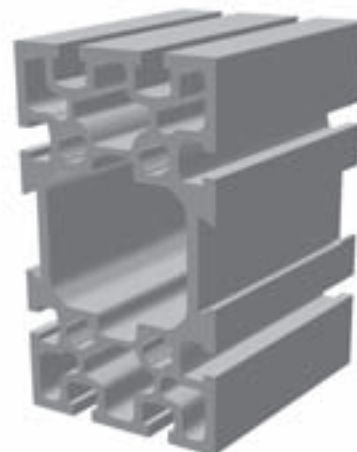


* Dovetail inserts available in various size

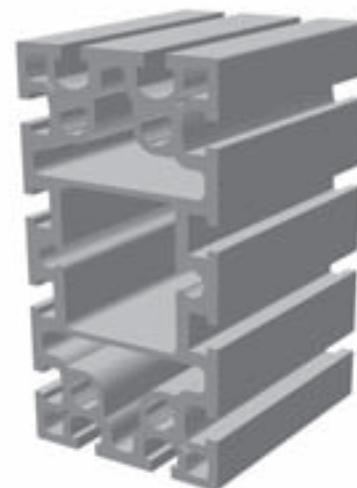TL-16

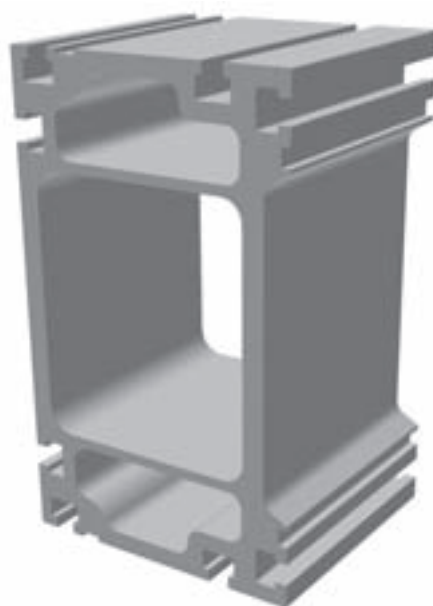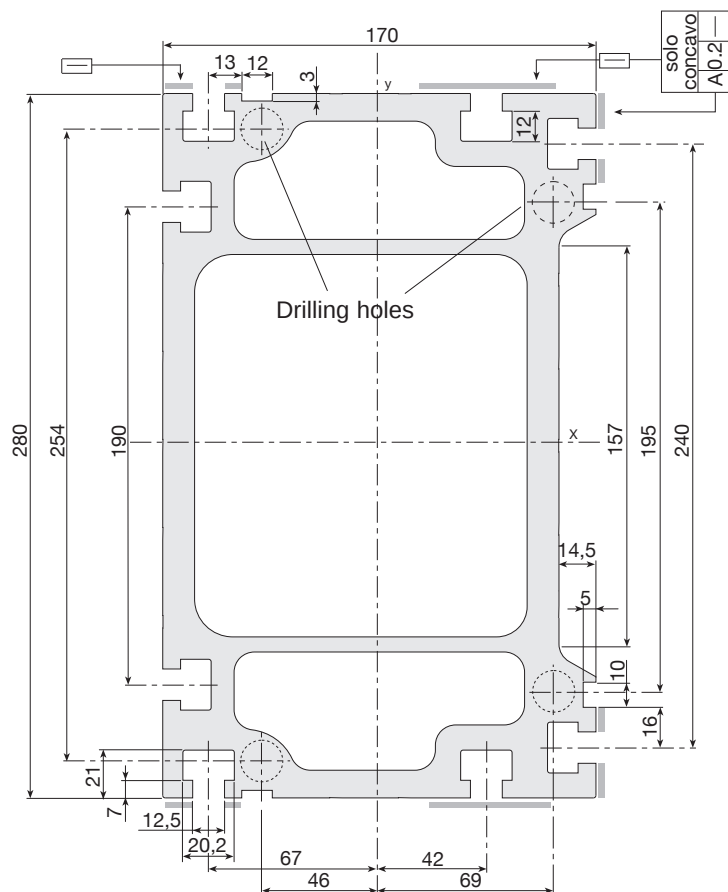

PRATYCA (170x280)	code 202.1147	
Weight	40	kg/m
Max. length	12	m
Moment of inertia Ix	134,103,000	mm ⁴
Moment of inertia Iy	50,288,000	mm ⁴
Polar moment of inertia Iz	72,700,000	mm ⁴
Bending section modulus Wx	957,790	mm ³
Bending section modulus Wy	591,620	mm ³

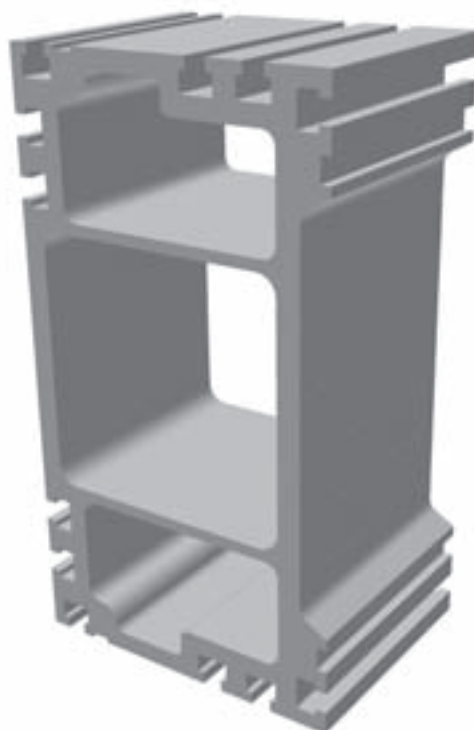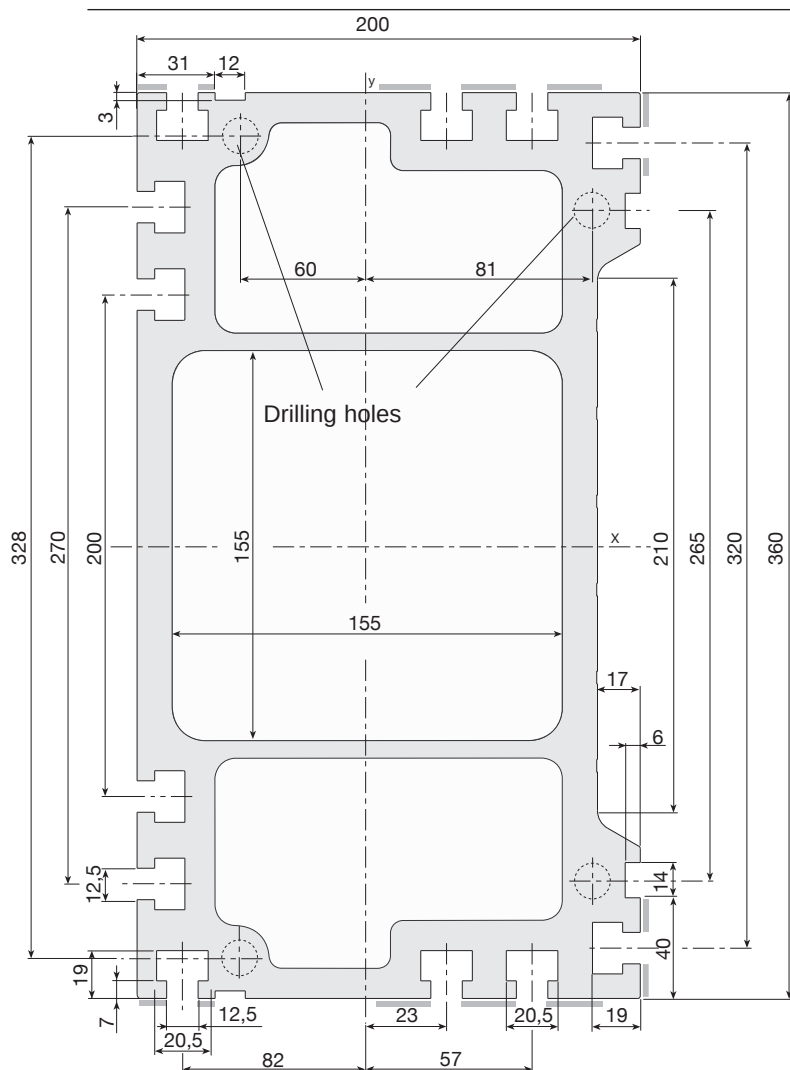


SOLYDA (200x360)	code 202.0342	
Weight	60	kg/m
Max. length	12	m
Moment of inertia Ix	318,687,200	mm ⁴
Moment of inertia Iy	105,533,000	mm ⁴
Polar moment of inertia Iz	150,000,000	mm ⁴
Bending section modulus (Wx)	1,770,500	mm ³
Bending section modulus (Wy)	1,035,300	mm ³




PAR 1

P / A / R / R / 180 / Stroke / Length / FND / ...

60 Kg **PC** 120 Kg
High Cycle Rate Low Cycle Rate

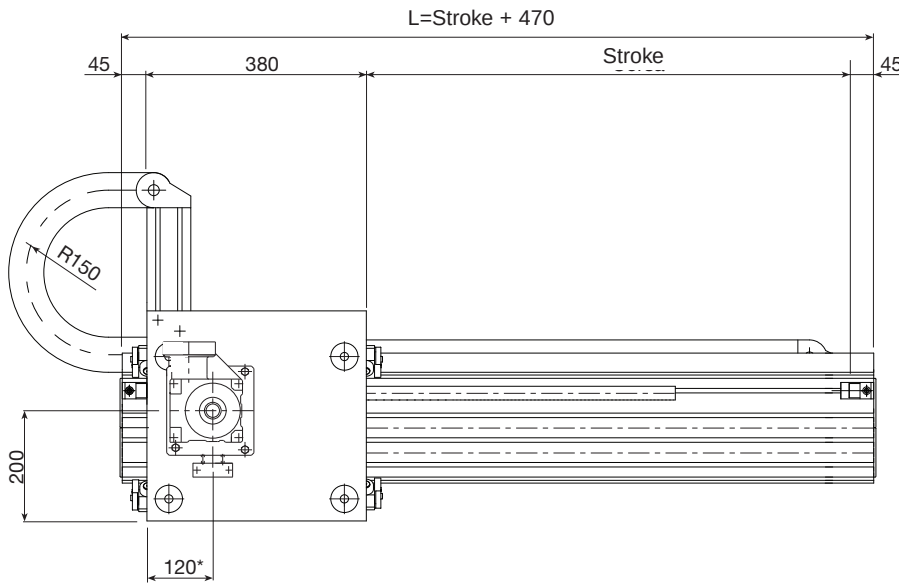

* For indication only, variable according to the gearbox chosen

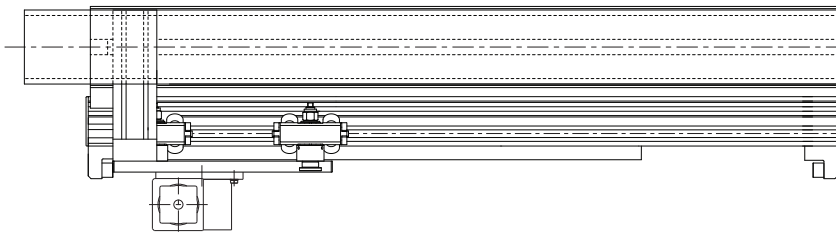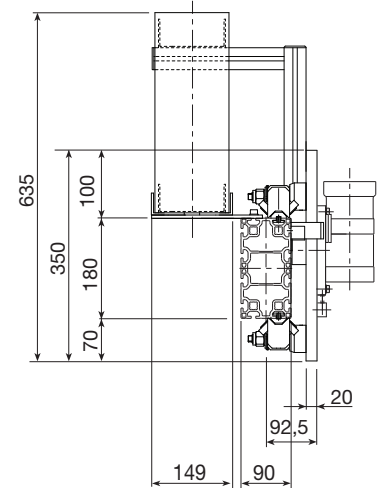

Performance	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	3.5 [m/s]
Max. acceleration	8 [m/s ²]
Repeatability	± 0.2 [mm]
Beam max. length without joint	8,000 [mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAR 1	490	1,170	1,170	2,700	5,900	5,900

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Assembly positions and load direction, see page 10

Construction data	X-axis
Load-bearing beam (see page 15/17)	E01-5
Rack (tempered, helical teeth: module KTD)	module 2 [mm ²]
Guide rail	28x11 (hardened)
Translation	4 roller slides with 4 rollers Ø30
Room available for energy chain	115x45 approx. [mm ²]
Pinion pitch diameter type ND	44.56 - (63.66) [mm]



Weights	X-axis
"Base" model ($stroke_x=0$)	$M_{base} = 28$ [kg]
Slide (plates + carriages)	$M_{slide} = 15$ [kg]
Beam (incl. guide rails and rack)	$q_x = 19$ [kg/m]

Formula:



Module total weight: $M_{tot} = M_{base} + (q_x \cdot stroke_x) / 1,000$ (Stroke_x in mm.)

P / A / S / 180 / Stroke / Length / FRD / ...

60 Kg **PC** 120 Kg
High Cycle Rate Low Cycle Rate

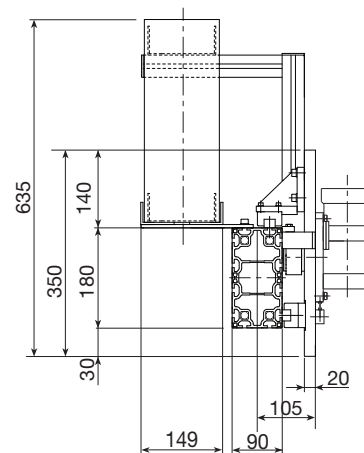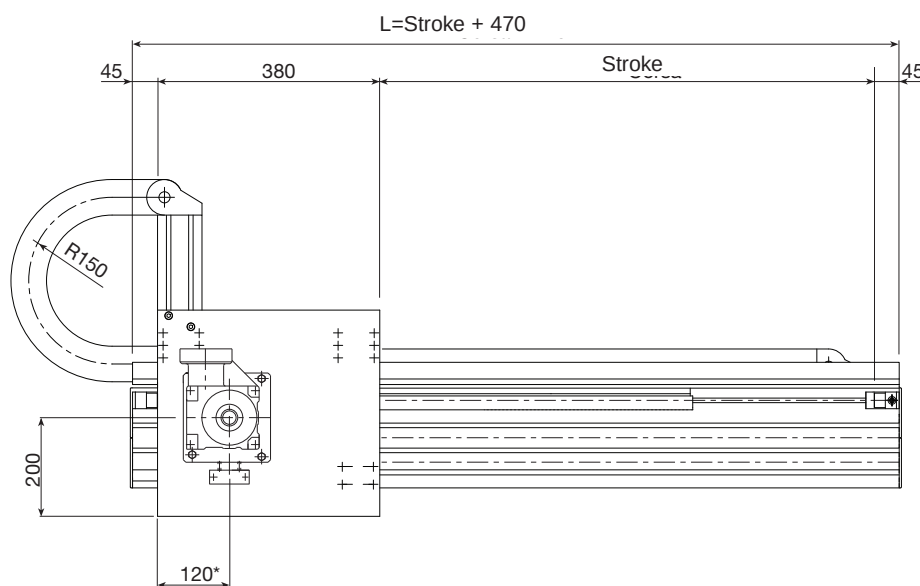

* For indication only, variable according to the gearbox chosen

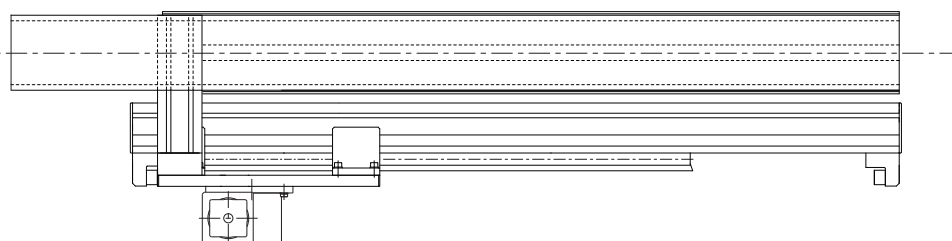

Performances	X-axis	
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)		
Max. speed	3.5	[m/s]
Max. acceleration	10	[m/s ²]
Repeatability	± 0.05	[mm]
Beam max. length without joint	8,000	[mm]

Recommended max working conditions

Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAS 1	1,250	3,450	3,450	2,900	16,950	16,950

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis	
Load-bearing beam (see page 15/17)	E01-5	
Rack (tempered, helical teeth, ground: module KSD)	module 2	[mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 20	
Room available for energy chain	115x45 approx.	[mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	44.56 - (63.66)	[mm]

Weights	X-axis	
"Base" model (stroke _x =0)	$M_{base} = 27$	[kg]
Slide (plates + carriages)	$M_{slitta} = 14$	[kg]
Beam (incl. guide rails and rack)	$q_x = 19$	[kg/m]

Formules:



Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)



PAR 2

P / A / R / Q/ 170 / Stroke / Length / FND / ...

80 Kg **PC** 250 Kg
High Cycle Rate Low Cycle Rate

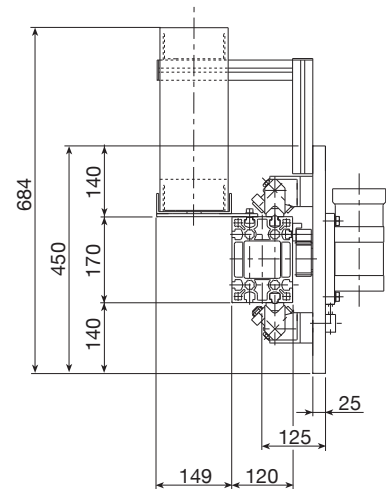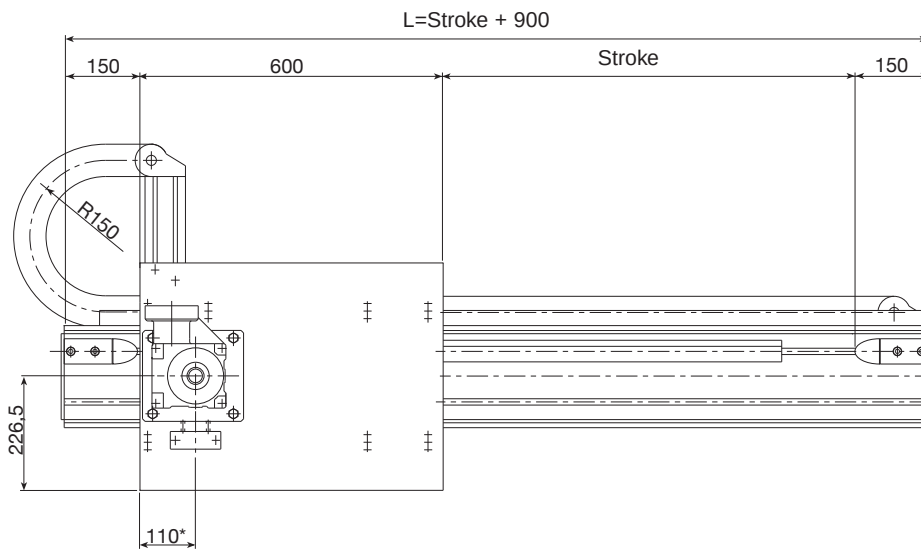

* For indication only, variable according to the gearbox chosen

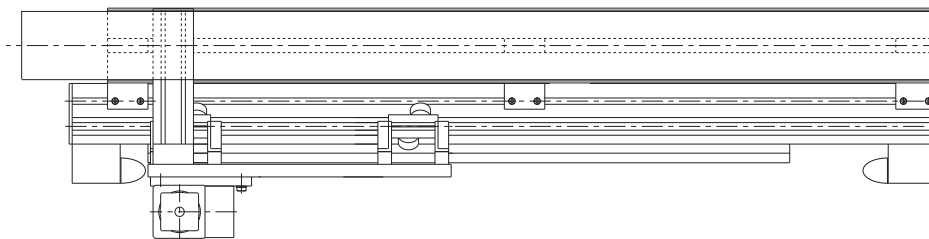

Performance	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	3.5 [m/s]
Max. acceleration	10 [m/s ²]
Repeatability	± 0.2 [mm]
Beam max. length without joint	6,000 [mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAR 2	560	1,350	1,350	5,980	7,000	7,050

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Assembly positions and load direction, see page 10

Construction data	X-axis
Load-bearing beam (see page 15/17)	Statyca
Rack (tempered, helical teeth: module KTD)	module 3 [mm ²]
Guide rail	35x16 (hardened and polished)
Translation	4 roller slides with 2 rollers Ø40
Room available for energy chain	115x45 [mm ²]
Pinion pitch diameter type ND	63.66 - (89.13) [mm]


Weights	X-axis
"Base" model ($stroke_x=0$)	$M_{base} = 59$ approx. [kg]
Slide (plates + carriages)	$M_{slide} = 29$ approx. [kg]
Beam (incl. guide rails and rack)	$q_x = 31$ approx. [kg/m]

Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot stroke_x) / 1,000$ (Stroke_x in mm.)

P / A / S / M / 170 / Stroke / Length / FRD / ...

80 Kg **PC** 250 Kg
High Cycle Rate Low Cycle Rate

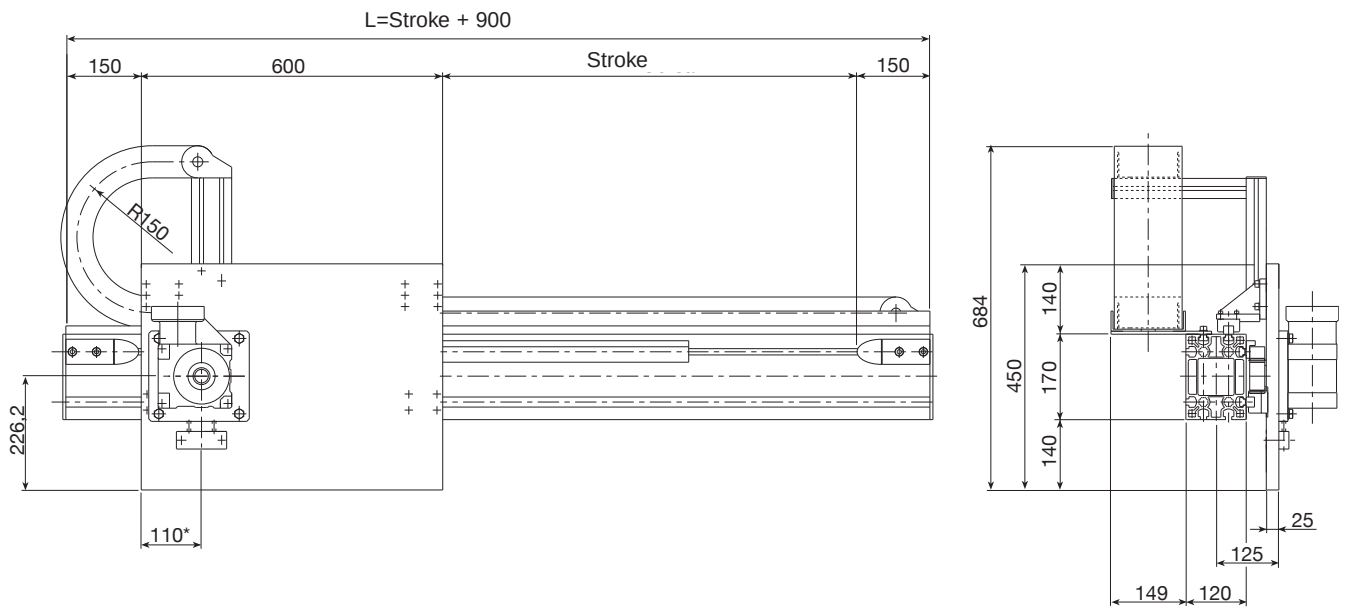

* For indication only, variable according to the gearbox chosen

Performances	X-axis	
Max. load (Pc _{max}) with load on axis (L ≤ 1,600 mm)		
Max. speed	3.5	[m/s]
Max. acceleration	10	[m/s ²]
Repeatability	± 0.05	[mm]
Beam max. length without joint	6,000	[mm]

Recommended max working conditions						
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
PASM2	1,170	3,450	3,450	5,980	16,950	16,950

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis	
Load-bearing beam (see page 15/17)	Statyca	
Rack (tempered, helical teeth, ground: module KSD)	module 3	[mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 20	
Room available for energy chain	115x45	[mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	63.66 - (89.13)	[mm]

Weights	X-axis	
"Base" model (stroke _x =0)	M _{base} = 57 approx.	[kg]
Slide (plates + carriages)	M _{slitta} = 29 approx.	[kg]
Beam (incl. guide rails and rack)	q _x = 29 approx.	[kg/m]



Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)



PAR 3

P / A / R / Q / 200 / Stroke / Length / FND / ...

100 Kg **PC** 300 Kg
High Cycle Rate Low Cycle Rate

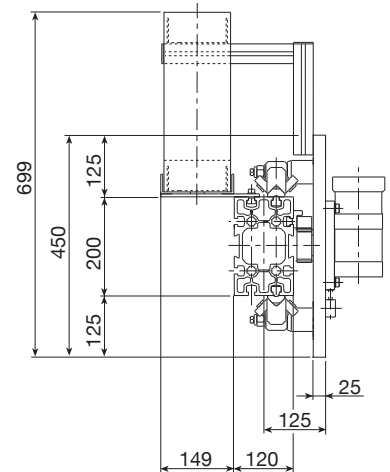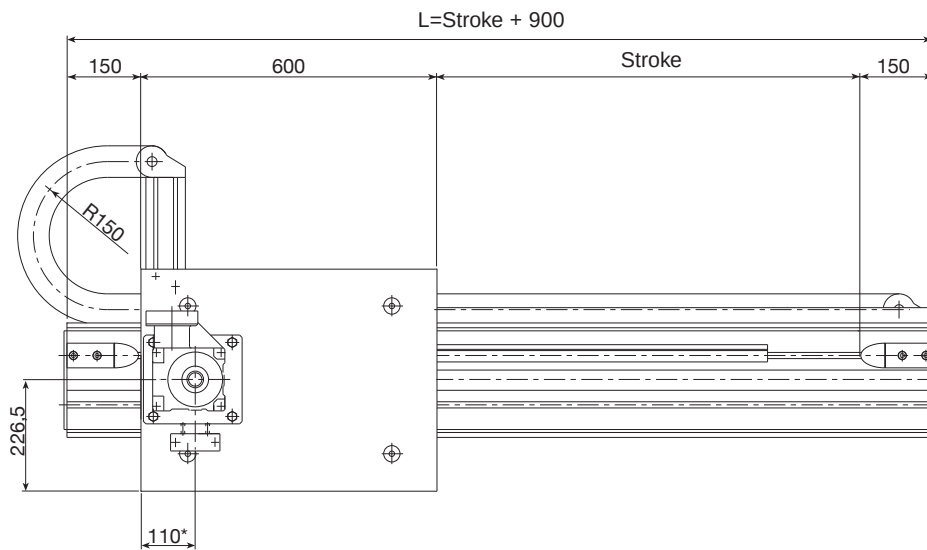

* For indication only, variable according to the gearbox chosen

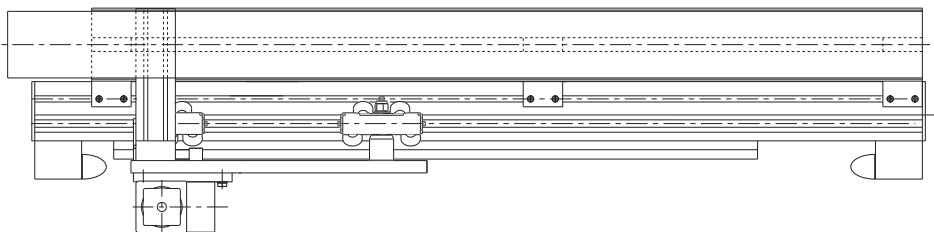

Performance	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	3 [m/s]
Max. acceleration	7 [m/s ²]
Repeatability	± 0.2 [mm]
Beam max. length without joint	8,000 [mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAR 3	1,115	2,685	2,685	6,100	14,100	14,100

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Assembly positions and load direction, see page 10

Construction data	X-axis
Load-bearing beam (see page 15/17)	Valyda
Rack (tempered, helical teeth: module KTD)	module 3 [mm ²]
Guide rail	28x11 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø40
Room available for energy chain	115x45 [mm ²]
Pinion pitch diameter type ND	63.66 - (89.13) [mm]



Weights	X-axis
"Base" model (stroke _x =0)	$M_{base} = 70$ approx. [kg]
Slide (plates + carriages)	$M_{slide} = 36$ approx. [kg]
Beam (incl. guide rails and rack)	$q_x = 35$ approx. [kg/m]

Formula:



Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)

P / A / S / M / 200 / Stroke / Length / FRD / ...

100 Kg **PC** 300 Kg
High Cycle Rate Low Cycle Rate

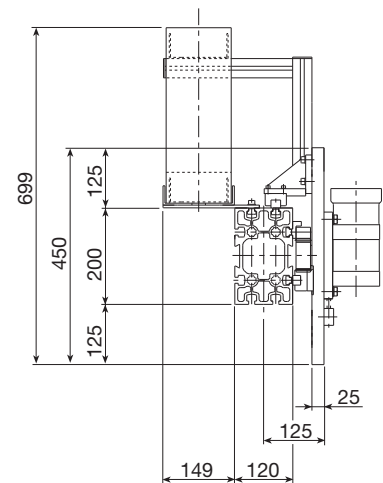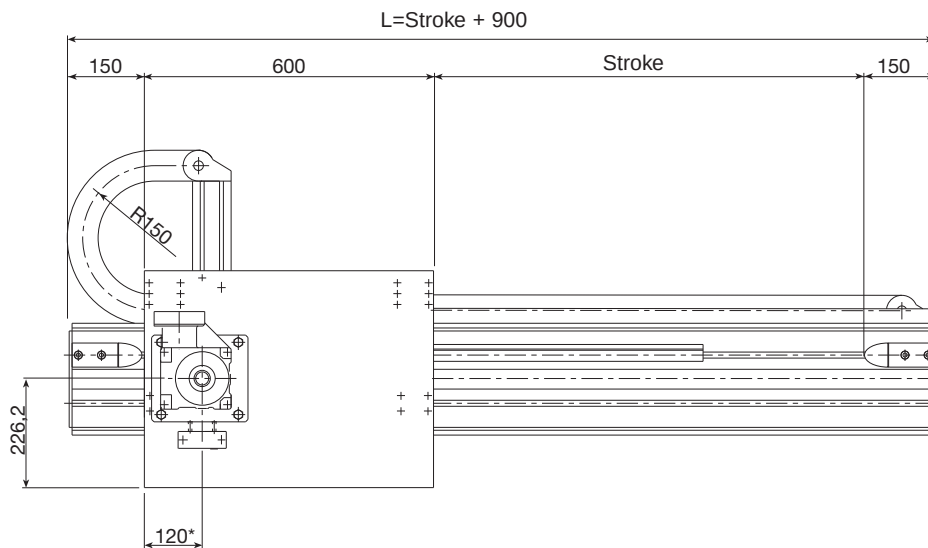

* For indication only, variable according to the gearbox chosen

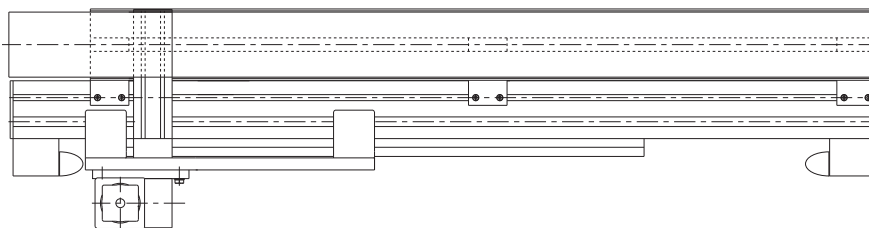

Performances	X-axis	
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)		
Max. speed	3	[m/s]
Max. acceleration	7	[m/s ²]
Repeatability	± 0.05	[mm]
Beam max. length without joint	12,000	[mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PASM3	1,280	3,500	3,500	6,100	16,950	16,950

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis	
Load-bearing beam (see page 15/17)	Valyda	
Rack (tempered, helical teeth, ground: module KSD)	module 3	[mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 20	
Room available for energy chain	115x45	[mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	63.66 - (89.13)	[mm]


Weights	X-axis	
"Base" model (stroke _x =0)	$M_{base} = 68$ approx.	[kg]
Slide (plates + carriages)	$M_{slitta} = 36$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_x = 33$ approx.	[kg/m]

Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)

PAR 4

P / A / R / P / 200 / Stroke / Length / FND / ...

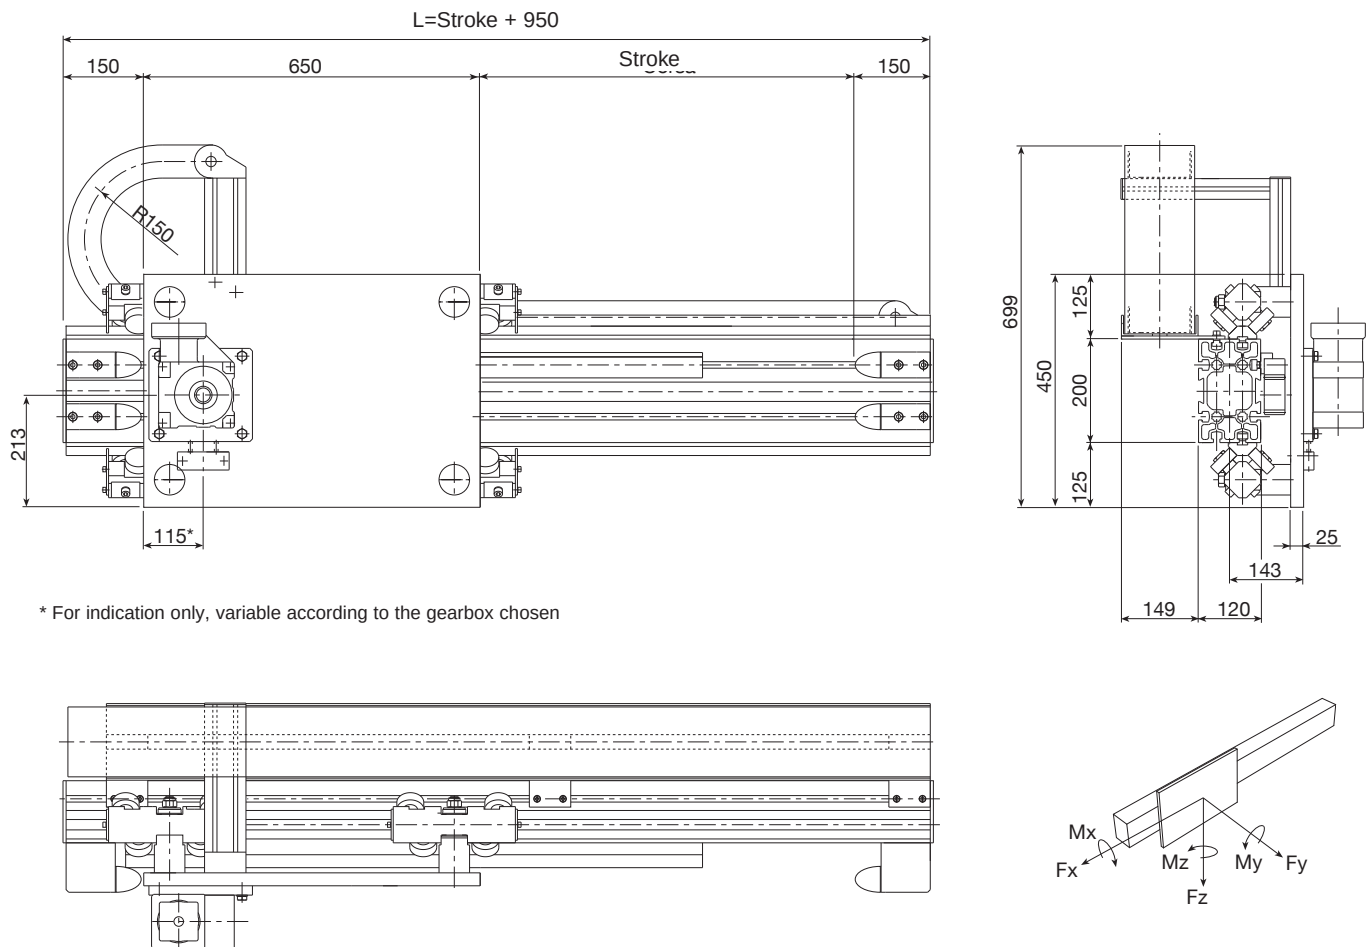

* For indication only, variable according to the gearbox chosen

Performance	X-axis	
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)		
Max. speed	3	[m/s]
Max. acceleration	7	[m/s ²]
Repeatability	± 0.2	[mm]
Beam max. length without joint	8,000	[mm]

Assembly positions and load direction, see page 10

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAR 4	2,200	5,350	5,380	8,400	23,925	23,925

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).


Construction data	X-axis	
Load-bearing beam (see page 15/17)	Valyda	
Rack (tempered, helical teeth: module KTD)	module 4	[mm ²]
Guide rail	55x25 (hardened and polished)	
Translation	4 roller slides with 4 rollers Ø52	
Room available for energy chain	115x45	[mm ²]
Ø Pinion pitch diameter type ND	76.39 - (106.10)	[mm]

Weights	X-axis	
"Base" model (stroke _x =0)	$M_{base} = 96$ approx.	[kg]
Slide (plates + carriages)	$M_{slide} = 48$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_x = 48$ approx.	[kg/m]




Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)

P / A / S / M / 200 / Stroke / Length / FRD / ...

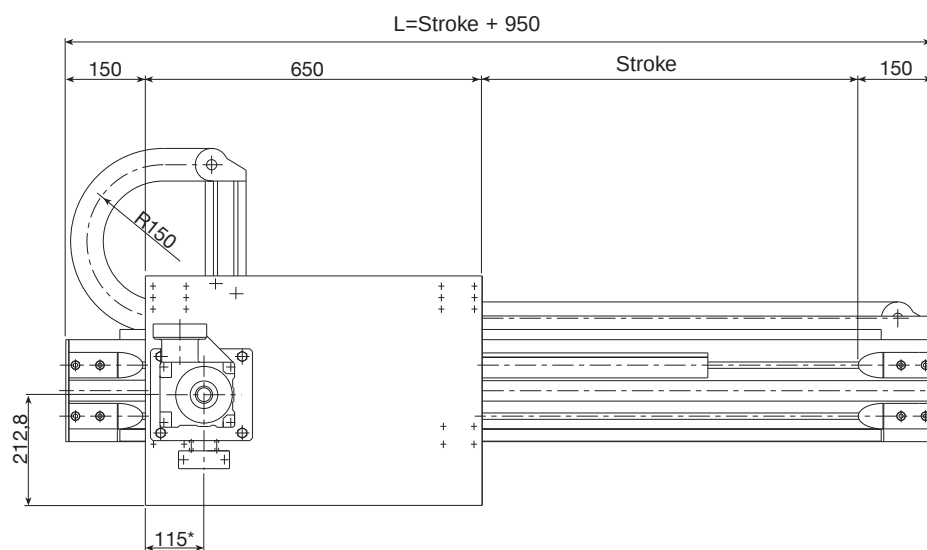

* For indication only, variable according to the gearbox chosen

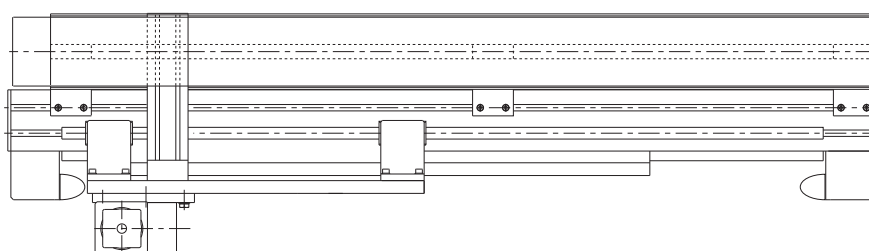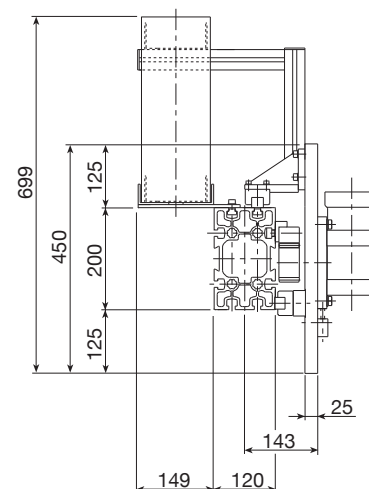

Performances	X-axis	
Max. load ($P_{c_{max}}$) with load on axis ($L \leq 1,600$ mm)		
Max. speed	3	[m/s]
Max. acceleration	7	[m/s ²]
Repeatability	$\pm 0,05$	[mm]
Beam max. length without joint	12,000	[mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PASM4	1,850	5,200	5,200	8,400	24,100	24,100

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis	
Load-bearing beam (see page 15/17)	Valyda	
Rack (tempered, helical teeth, ground: module KSD)	module 4	[mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 25	
Room available for energy chain	115x45	[mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	[mm]



Weights	X-axis	
"Base" model (stroke _x =0)	$M_{base} = 80$ approx.	[kg]
Slide (plates + carriages)	$M_{slitta} = 38$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_x = 40$ approx.	[kg/m]

Formula:



Module total weight: $M_{tot} = M_{base} + (q_x \cdot stroke_x) / 1,000$ (Stroke_x in mm.)

PAR 5

P / A / R / P / 220 / Stroke / Length / FND / ...

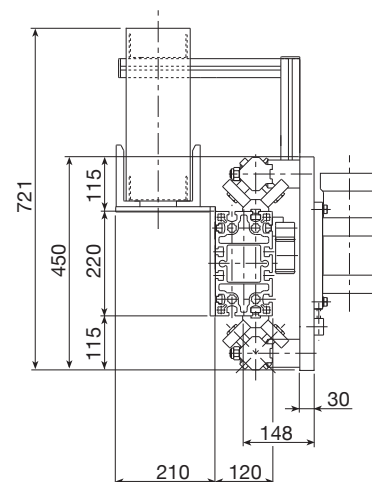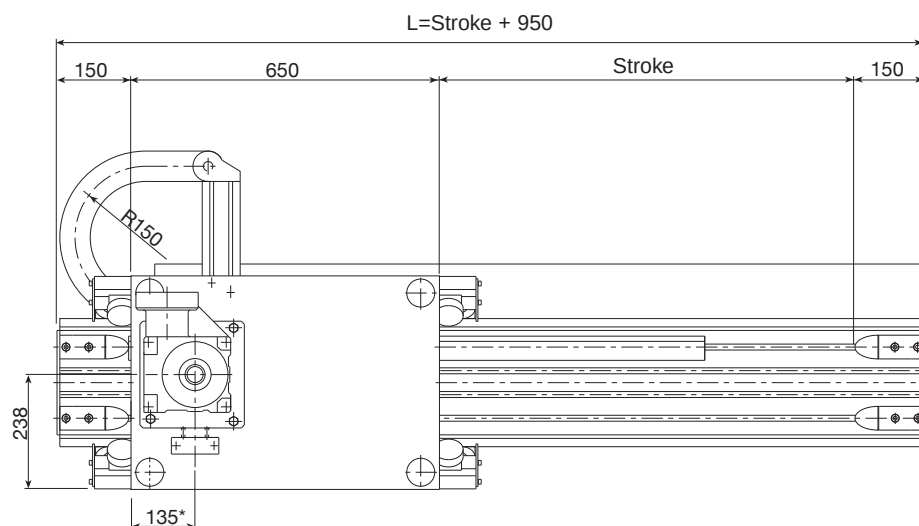

* For indication only, variable according to the gearbox chosen

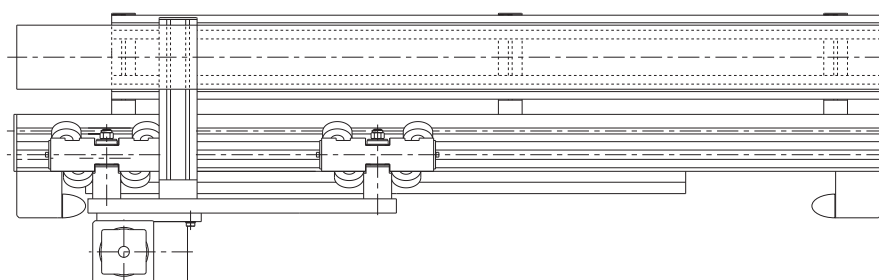

Performance	X-axis	
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)		
Max. speed	3	[m/s]
Max. acceleration	6	[m/s ²]
Repeatability	± 0.2	[mm]
Beam max. length without joint	12,000	[mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAR 5	3,000	6,720	6,720	9,800	29,900	29,900

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Assembly positions and load direction, see page 10



Construction data	X-axis
Load-bearing beam (see page 15/17)	Logyca
Rack (tempered, helical teeth: module KTD)	module 4 [mm ²]
Guide rail	55x25 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø62
Room available for energy chain	115x45 [mm ²]
Ø Pinion pitch diameter type ND	76.39 - (106.10) [mm]

Weights	X-axis
"Base" model (stroke _x =0)	$M_{base} = 106$ approx. [kg]
Slide (plates + carriages)	$M_{slide} = 54$ approx. [kg]
Beam (incl. guide rails and rack)	$q_x = 52$ approx. [kg/m]



Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)

P / A / S / M / 220 / Stroke / Length / FRD / ...

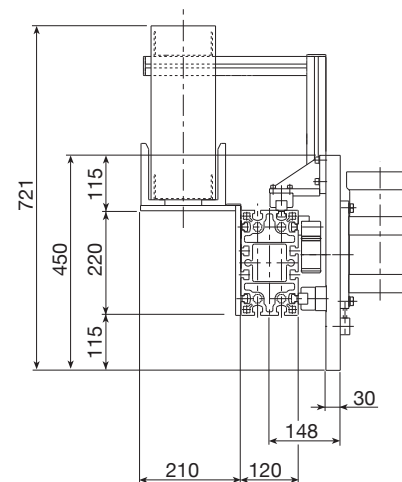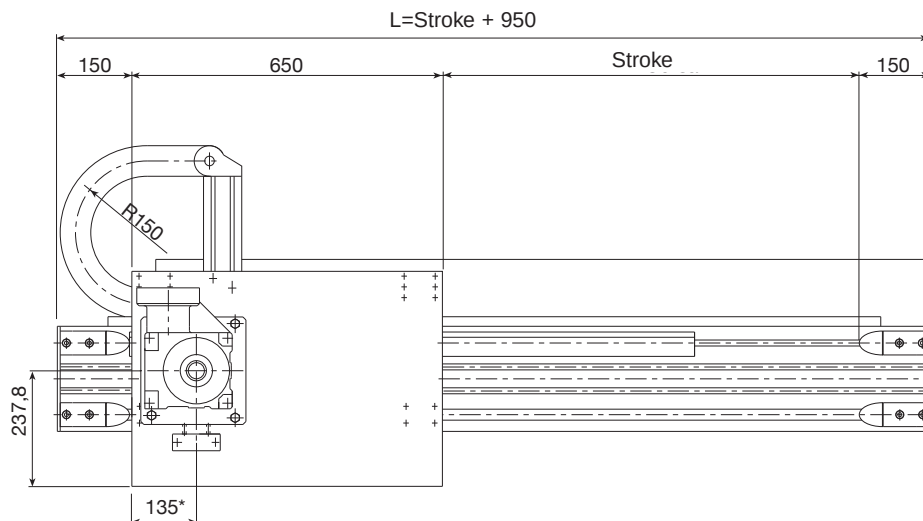

* For indication only, variable according to the gearbox chosen

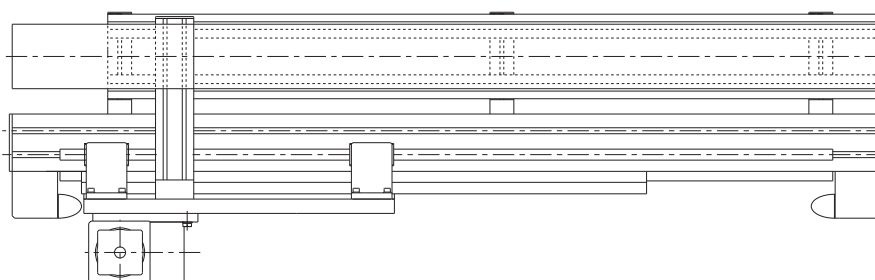

Performances	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	3 [m/s]
Max. acceleration	6 [m/s ²]
Repeatability	± 0.05 [mm]
Beam max. length without joint	12,000 [mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PASM 5	2,060	5,200	5,200	9,800	24,100	24,100

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis
Load-bearing beam (see page 15/17)	Logyca
Rack (tempered, helical teeth, ground: module KSD)	module 4 [mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 25
Room available for energy chain	115x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10) [mm]

Weights	X-axis
"Base" model (stroke _x =0)	$M_{base} = 90$ approx. [kg]
Slide (plates + carriages)	$M_{slitta} = 44$ approx. [kg]
Beam (incl. guide rails and rack)	$q_x = 44$ approx. [kg/m]



Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)



PAR 6

P / A / R / P / 280 / Stroke / Length / FND / ...

300 Kg **PC** 600 Kg
High Cycle Rate Low Cycle Rate

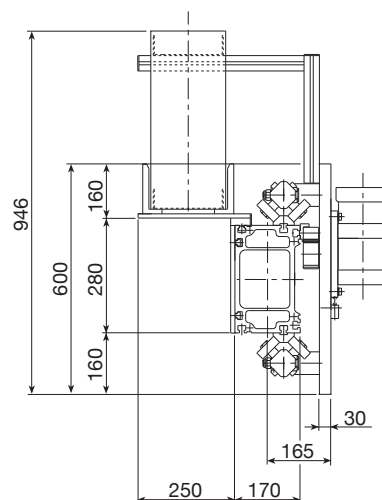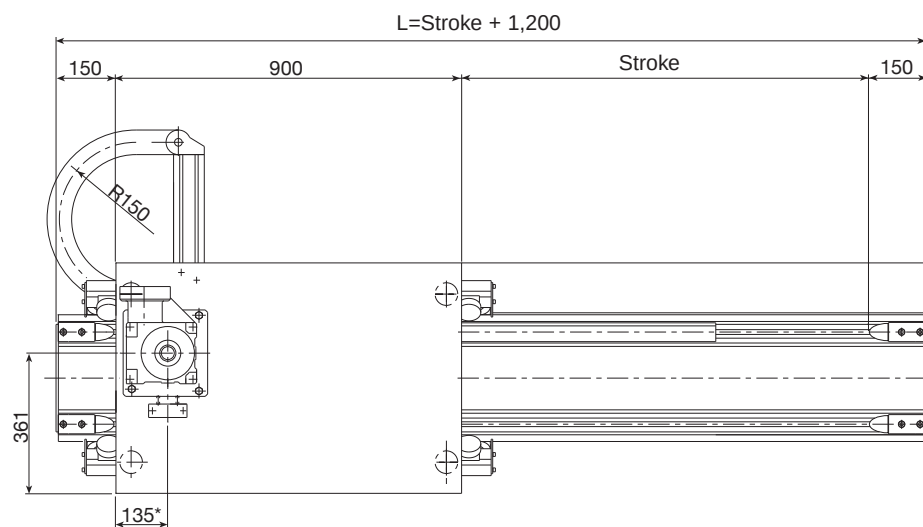

* For indication only, variable according to the gearbox chosen

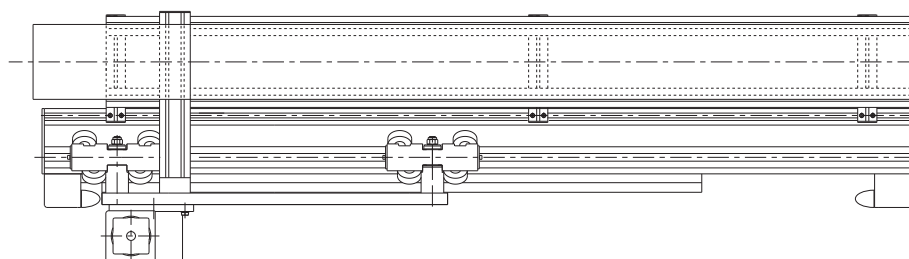

Performance	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	3 [m/s]
Max. acceleration	4 [m/s ²]
Repeatability	± 0.2 [mm]
Beam max. length without joint	12,000 [mm]

Assembly positions and load direction, see page 10

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAR 6	3,700	8,770	8,770	10,280	29,900	29,900

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Construction data	X-axis
Load-bearing beam (see page 15/17)	Pratyca
Rack (tempered, helical teeth: module KTD)	module 4 [mm ²]
Guide rail	55x25 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø62
Room available for energy chain	175x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10) [mm]



Weights	X-axis
"Base" model ($\text{stroke}_x=0$)	$M_{\text{base}} = 28$ [kg]
Slide (plates + carriages)	$M_{\text{slide}} = 15$ [kg]
Beam (incl. guide rails and rack)	$q_x = 19$ [kg/m]

Formula:



Module total weight: $M_{\text{tot}} = M_{\text{base}} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)

P / A / S / M / 280 / Stroke / Length / FRD / ...

300 Kg **PC** 600 Kg
High Cycle Rate Low Cycle Rate

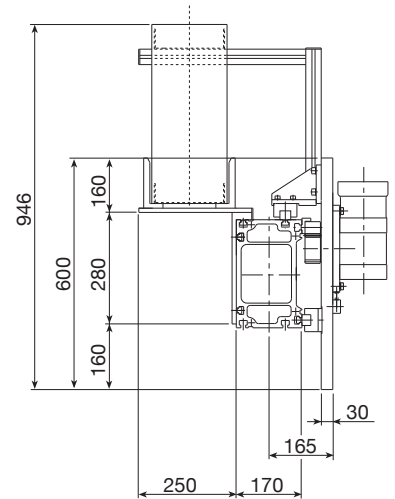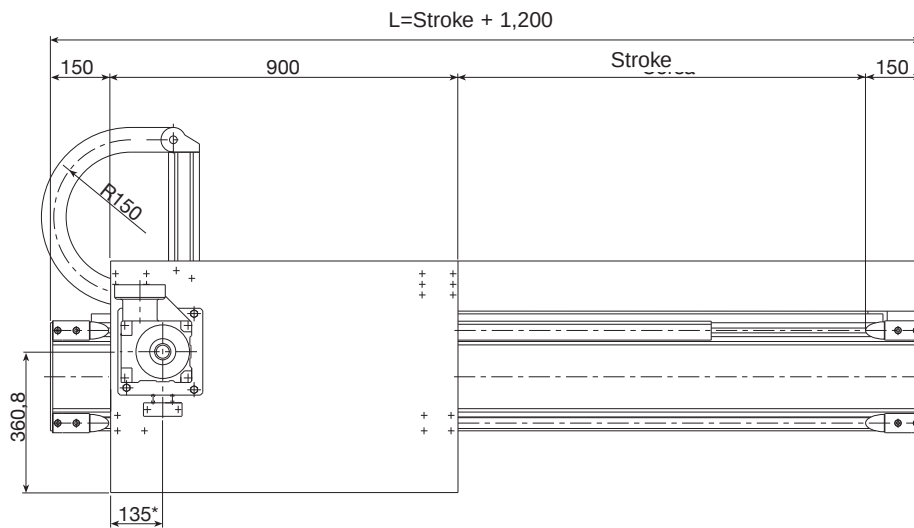

* For indication only, variable according to the gearbox chosen

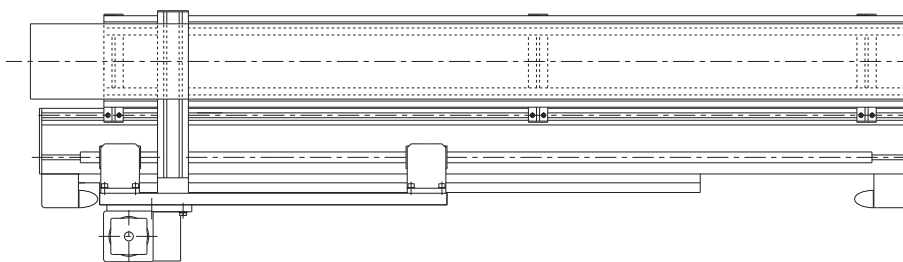

Performances	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	3 [m/s]
Max. acceleration	5 [m/s ²]
Repeatability	± 0.05 [mm]
Beam max. length without joint	12,000 [mm]

Recommended max working conditions	Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
	PASM 6	4,160	6,750	6,750	10,280	34,050	34,050

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis
Load-bearing beam (see page 15/17)	Pratya
Rack (tempered, helical teeth, ground: module KSD)	module 4 [mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 30
Room available for energy chain	175x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10) [mm]



Weights	X-axis
"Base" model (stroke _x =0)	$M_{base} = 149$ approx. [kg]
Slide (plates + carriages)	$M_{slitta} = 69$ approx. [kg]
Beam (incl. guide rails and rack)	$q_x = 60$ approx. [kg/m]

Formula:



Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)

PAR 8

P / A / R / P / 280 / Stroke / Length / FND / ...

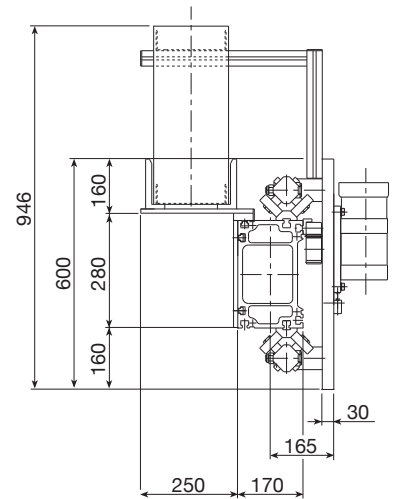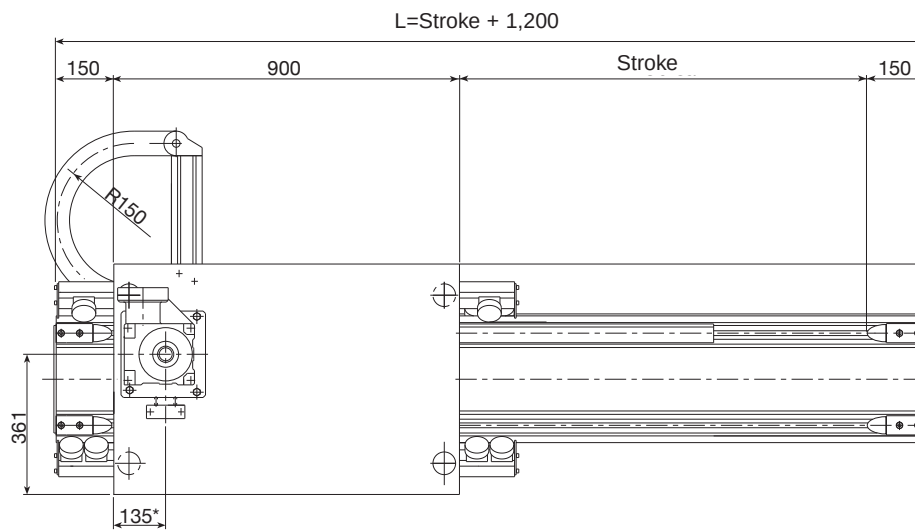

* For indication only, variable according to the gearbox chosen

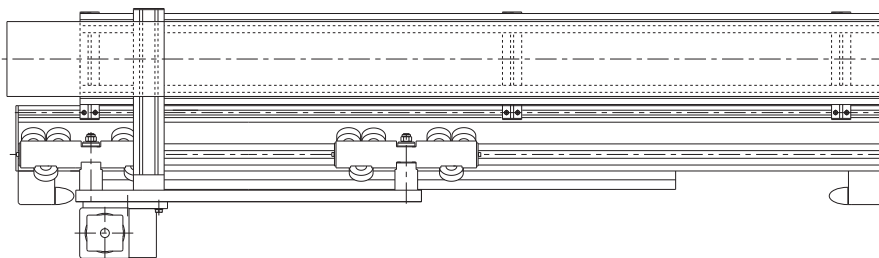

Performance	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	2.5 [m/s]
Max. acceleration	2 [m/s ²]
Repeatability	± 0.25 [mm]
Beam max. length without joint	12,000 [mm]

Assembly positions and load direction, see page 10

** With vertical positioning of the unit, a partial load capacity compensation is required

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PAR 8	5,550	8,800	13,160	10,280	44,800	29,900

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).



Construction data	X-axis
Load-bearing beam (see page 15/17)	Pratyca
Rack (tempered, helical teeth: module KTD)	module 4 [mm ²]
Guide rail	55x25 (hardened and polished)
Translation	4 roller slides with 6 rollers Ø62
Room available for energy chain	175x45 [mm ²]
Ø Pinion pitch diameter type ND	76,39 x 106,10 [mm]

Weights	X-axis
"Base" model (stroke _x =0)	$M_{base} = 173$ approx. [kg]
Slide (plates + carriages)	$M_{slide} = 88$ approx. [kg]
Beam (incl. guide rails and rack)	$q_x = 66$ approx. [kg/m]



Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)

P / A / S / M / 280 / Stroke / Length / FRD / ...

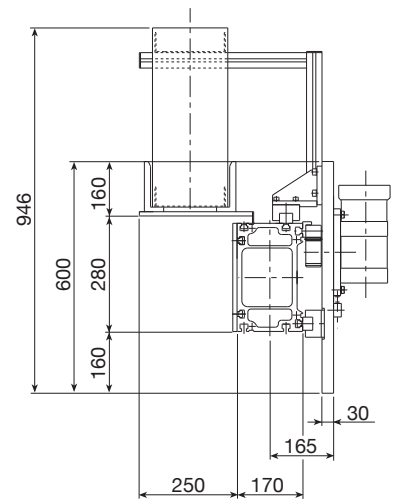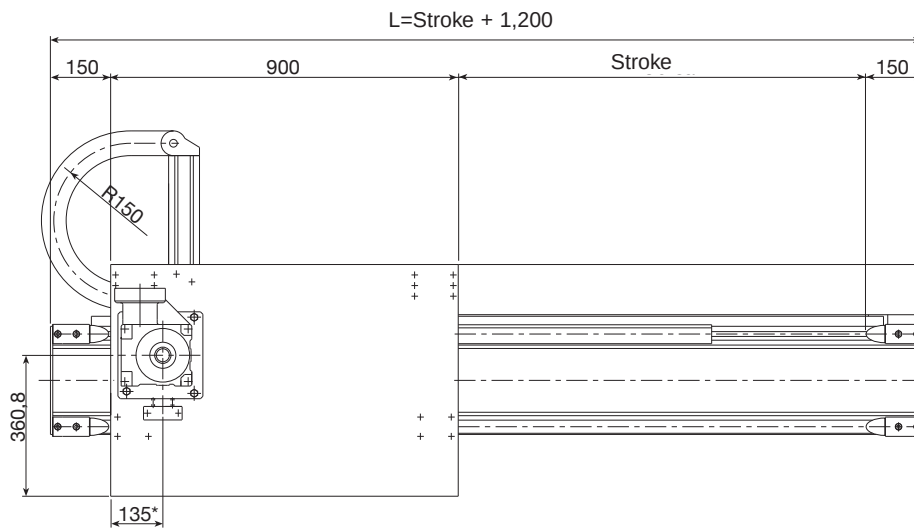

* For indication only, variable according to the gearbox chosen

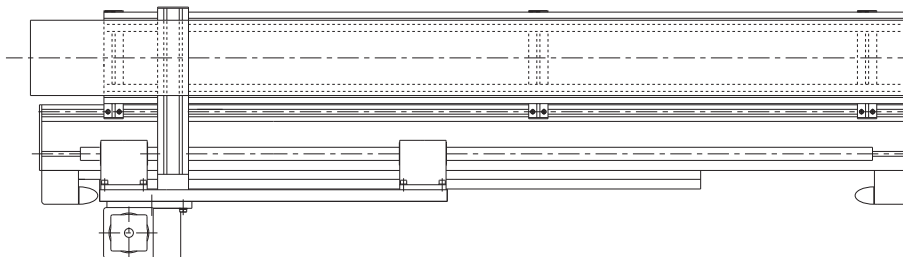

Performances	X-axis	
Max. load ($P_{c_{max}}$) with load on axis ($L \leq 1,600$ mm)		
Max. speed	2.5	[m/s]
Max. acceleration	2	[m/s ²]
Repeatability	± 0.1	[mm]
Beam max. length without joint	12,000	[mm]

Recommended max working conditions						
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
PASM 8	5,840	13,100	13,100	11,420	47,350	47,350

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis	
Load-bearing beam (see page 15/17)	Pratyca	
Rack (tempered, helical teeth, ground: module KSD)	module 4	[mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 35	
Room available for energy chain	175x45	[mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	[mm]

Weights	X-axis	
"Base" model (stroke _x =0)	$M_{base} = 159$ approx.	[kg]
Slide (plates + carriages)	$M_{slitta} = 76$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_x = 64$ approx.	[kg/m]


Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot \text{stroke}_x) / 1,000$ (Stroke_x in mm.)




PAR 10

P / A / R / P / 360 / Stroke / Length / FND / ...

500 Kg **PC** 1000 Kg
High Cycle Rate Low Cycle Rate

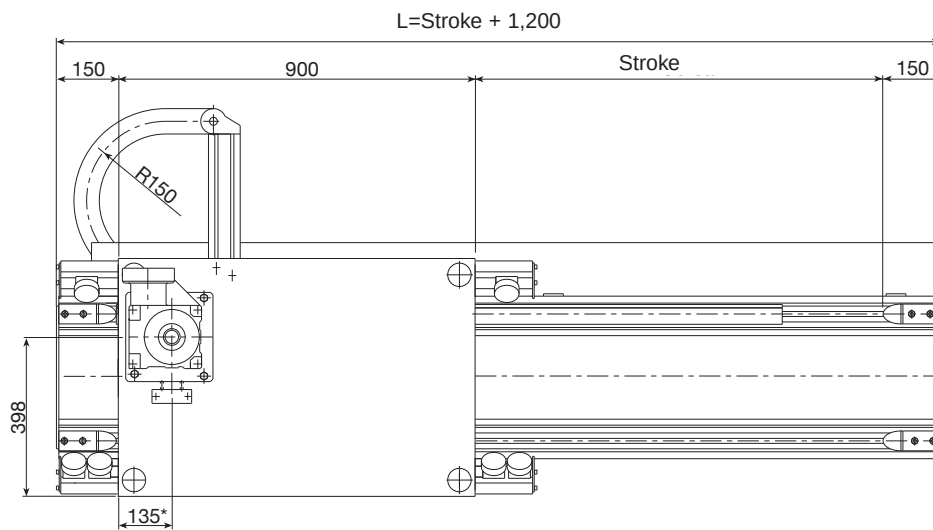

* For indication only, variable according to the gearbox chosen

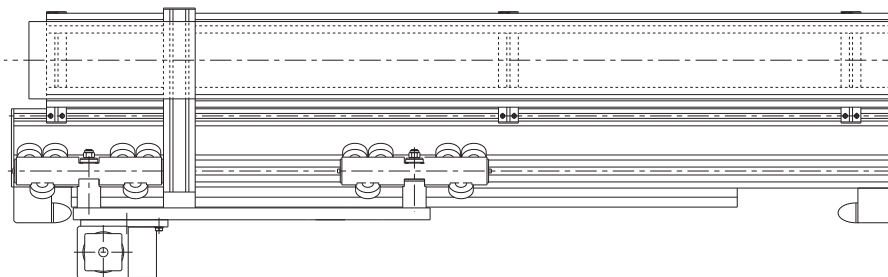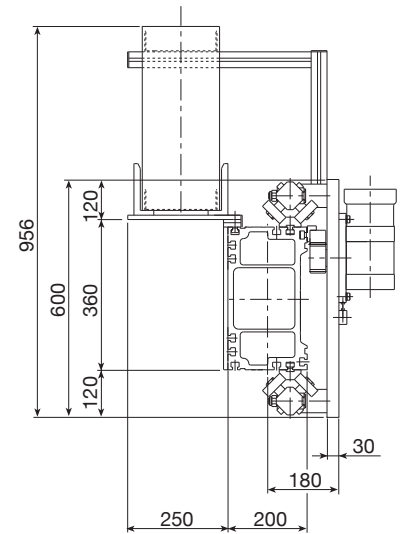

Performance	X-axis
Max. load (Pc _{max}) with load on axis (L ≤ 1,600 mm)	
Max. speed	2.5 [m/s]
Max. acceleration	2 [m/s ²]
Repeatability	± 0.25 [mm]
Beam max. length without joint	12,000 [mm]

Assembly positions and load direction, see page 10

** With vertical positioning of the unit, a partial load capacity compensation is required

Recommended max working conditions						
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
PAR 10	6,900	8,800	13,160	10,280	44,860	29,900

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Construction data	X-axis
Load-bearing beam (see page 15/17)	Solyda
Rack (tempered, helical teeth: module KTD)	module 4 [mm ²]
Guide rail	55x25 (hardened and polished)
Translation	4 roller slides with 6 rollers Ø62
Room available for energy chain	115x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10) [mm]


Weights	X-axis
"Base" model (stroke _x =0)	M _{base} = 196 approx. [kg]
Slide (plates + carriages)	M _{slide} = 88 approx. [kg]
Beam (incl. guide rails and rack)	q _x = 85 approx. [kg/m]

Formula:




Module total weight: $M_{tot} = M_{base} + (q_x \cdot stroke_x) / 1,000$ (Stroke_x in mm.)

P / A / S / M / 360 / Stroke / Length / FRD / ...

500 Kg **PC** 1000 Kg
High Cycle Rate Low Cycle Rate

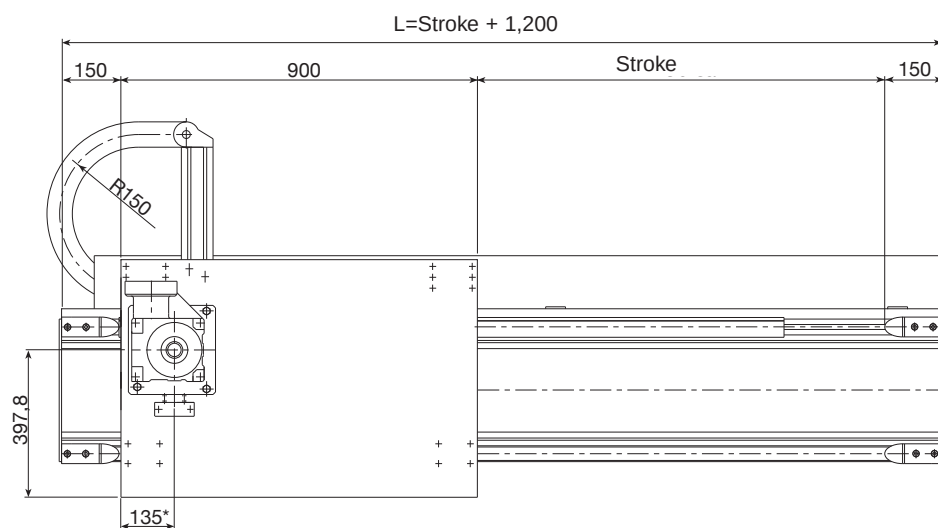

* For indication only, variable according to the gearbox chosen

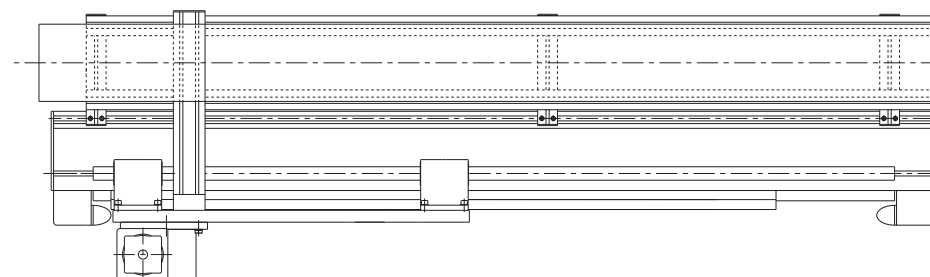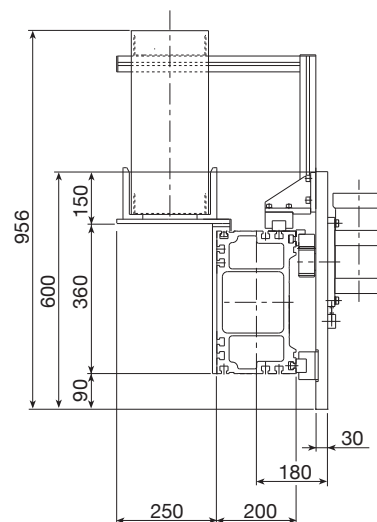

Performances	X-axis
Max. load ($P_{c \max}$) with load on axis ($L \leq 1,600$ mm)	
Max. speed	2.5 [m/s]
Max. acceleration	3 [m/s ²]
Repeatability	$\pm 0,1$ [mm]
Beam max. length without joint	12,000 [mm]

Recommended max working conditions	Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
	PASM10	7,240	13,100	13,100	11,600	47,350	47,350

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Construction data	X-axis
Load-bearing beam (see page 15/17)	Solyda
Rack (tempered, helical teeth, ground: module KSD)	module 4 [mm ²]
Translation: 4 caged ball roller slides and guide rails	Size 35
Room available for energy chain	175x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	127.32 [mm]

Weights	X-axis
"Base" model (stroke _x =0)	$M_{base} = 182$ approx. [kg]
Slide (plates + carriages)	$M_{slitta} = 76$ approx. [kg]
Beam (incl. guide rails and rack)	$q_x = 83$ approx. [kg/m]



Formula:

Module total weight: $M_{tot} = M_{base} + (q_x \cdot stroke_x) / 1,000$ (Stroke_x in mm.)



PAR 1/05

Y-Axis / P / A / R / Q / 180 / Stroke / Length / FND / ...
Z-Axis / P / A / R / Q / 90 / Stroke / Length / X / FND / ...

5 Kg **PC** 80 Kg
High Cycle Rate Low Cycle Rate

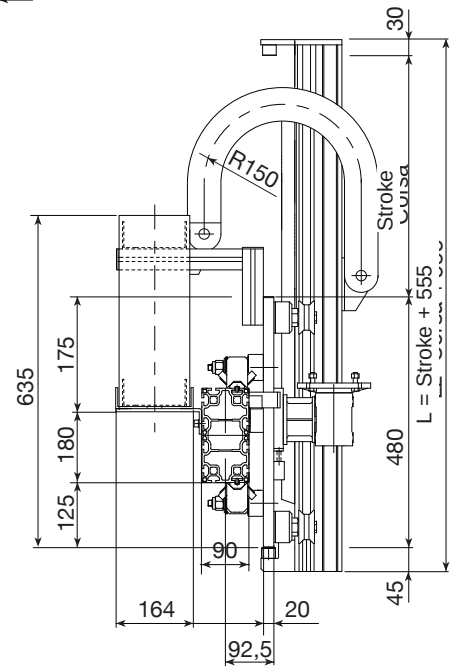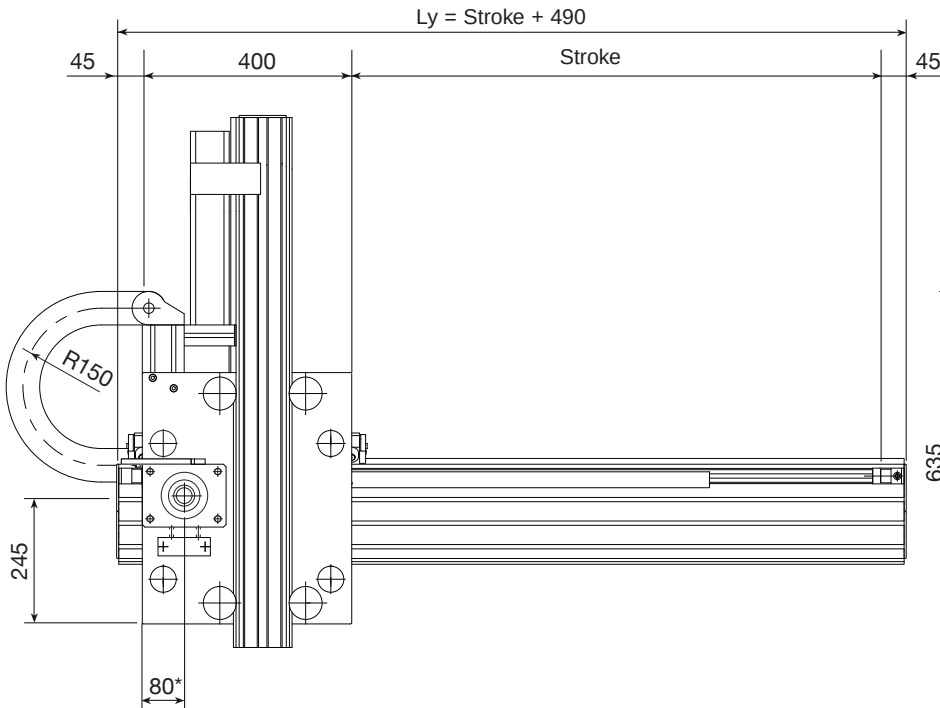

* For indication only, variable according to the gearbox chosen

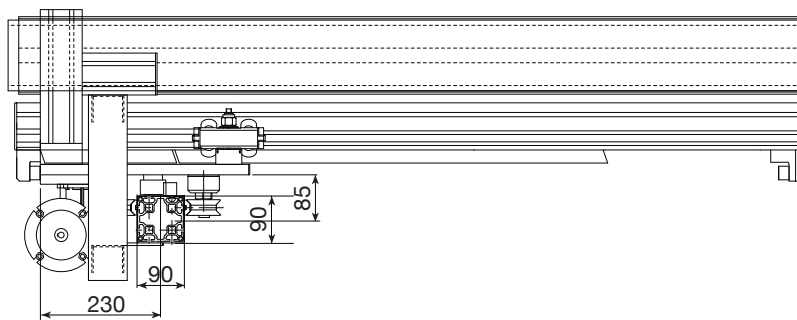

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	3.5	3.5 [m/s]
Max. acceleration	8	5 [m/s ²]
Repeatability	-	± 0.2 [mm]
Beam max. length without joint	8,000	6,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PAR 1/05 490	490	1,170	1,170	1,600	1,620

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	E01-5	E01-4
Rack (tempered, helical teeth: module KTD)	module 2	module 2 [mm ²]
Guide rails	28x11 (hardened)	28x11 (hardened)
Translation	4 roller slides with 4 rollers Ø30	4 V-shaped rollers Ø63
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter type ND	44.56 - (63.66)	44.56 - (63.66) [mm]

Weights	Y-axis	Z-axis
"Base" model ($stroke_x$ and $stroke_z=0$)	$M_{base} = 59$	[kg]
Slide (plates + carriages)	$M_{slide} = 26$	[kg]
Beam (incl. guide rails and rack)	$q_y = 22$	$q_z = 15$ [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$




Module total weight: $M_{tot} = M_{base} + (q_y \cdot stroke_y + q_z \cdot stroke_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / 180 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / 90 / Stroke / Length / X / FRD / ...

25 Kg **PC** 80 Kg
High Cycle Rate Low Cycle Rate

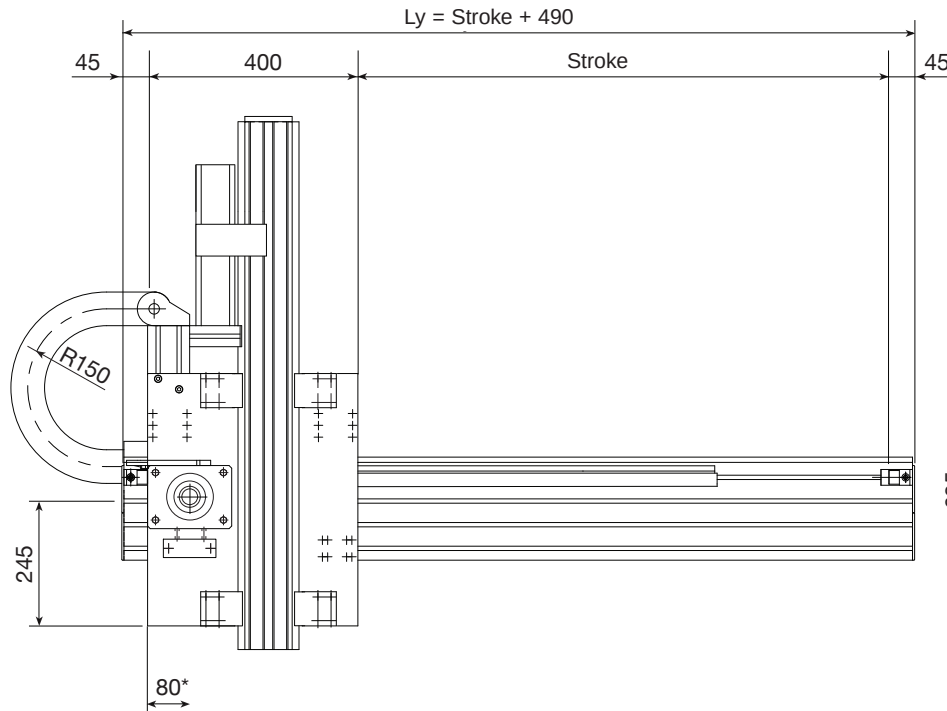

* For indication only, variable according to the gearbox chosen

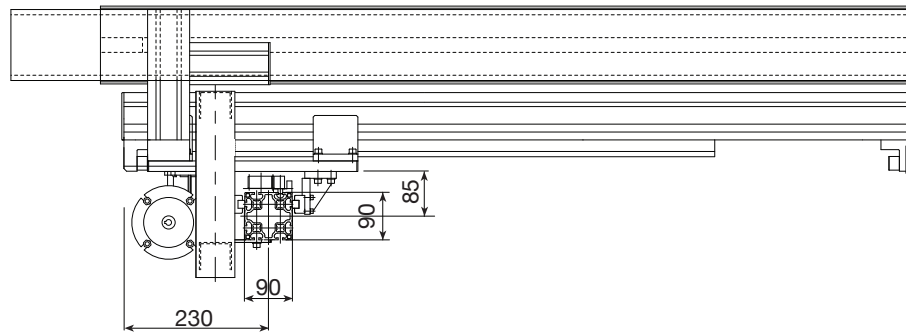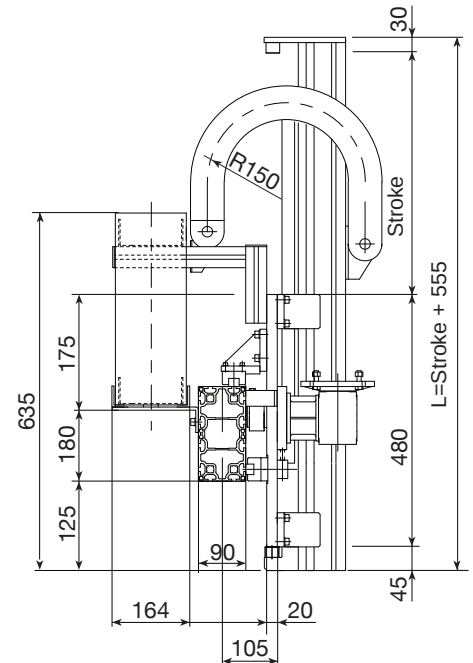

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	3.5	3.5 [m/s]
Max. acceleration	10	7 [m/s ²]
Repeatability	-	± 0.1 [mm]
Beam max. length without joint	8,000	6,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PAS 1/05	1,220	1,440	320	1,200	2,310

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	E01-5	E01-4
Rack (tempered, helical teeth, ground: module KSD)	module 2	module 2 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 20	size 15
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	44.56 - (63.66)	44.56 - (63.66) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	$M_{\text{base}} = 59$	[kg]
Slide (plates + carriages)	$M_{\text{slide}} = 26$	[kg]
Beam (incl. guide rails and rack)	$q_y = 24$	$q_z = 14$ [kg/m]

Formules:


Actual load: $P_{\text{eff}} = P_{\text{max}} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{\text{tot}} = M_{\text{base}} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)



PAR 2/1

Y-Axis / P / A / R / Q / 170 / Stroke / Length / FND / ...
Z-Axis / P / A / R / P / 90 / Stroke / Length / X / FND / ...

25 Kg **PC** 80 Kg
High Cycle Rate Low Cycle Rate

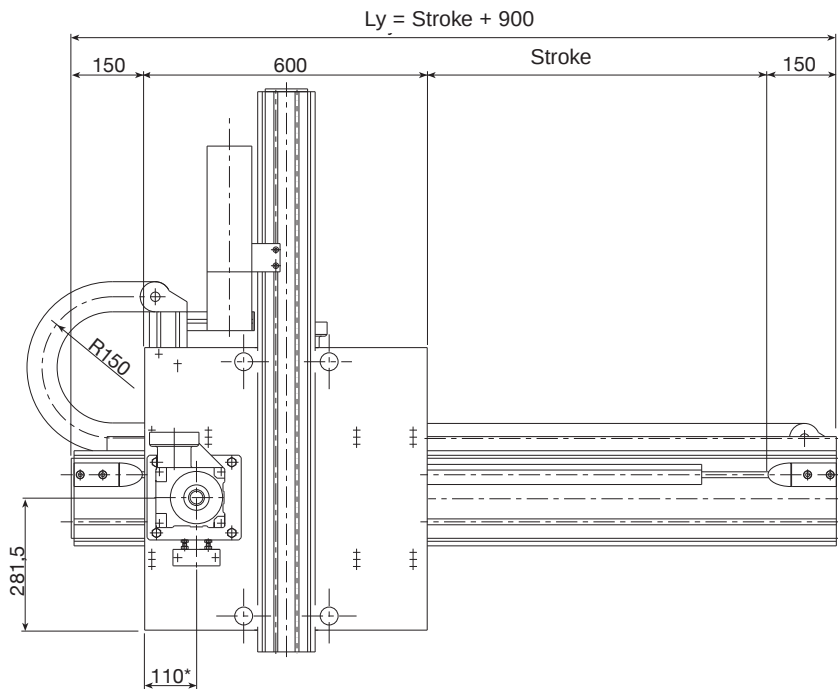

* For indication only, variable according to the gearbox chosen

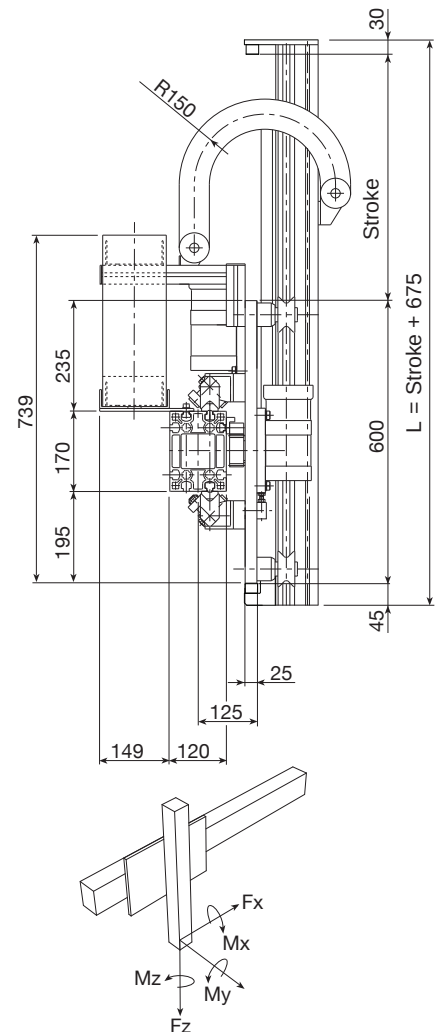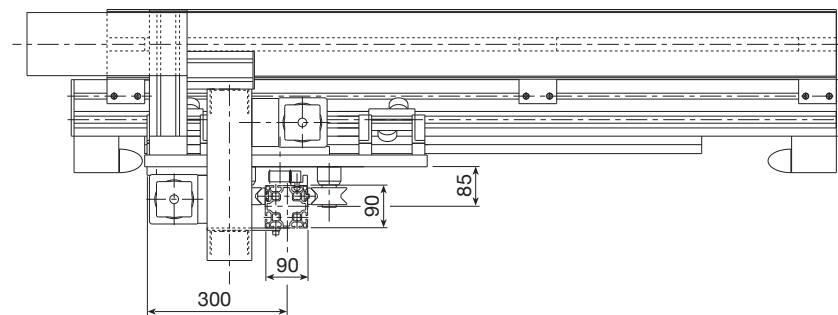

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	3.5	3.5 [m/s]
Max. acceleration	10	7 [m/s ²]
Repeatability	-	±0.2 [mm]
Beam max. length without joint	8,000	6,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PAR 2/1	956	1,340	170	3,200	2,300

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Statyca	E01-4
Rack (tempered, helical teeth: module KTD)	module 3	module 2 [mm ²]
Guide rails	28x11 (hardened and polished)	28x11 (hardened and polished)
Translation	4 roller slides with 2 rollers Ø30	4 V-shaped rollers Ø63
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter type ND	63.66 - (89.13)	44.56 - (63.66) [mm]

Weights	Y-axis	Z-axis
"Base" model (stroke _x and stroke _z =0)	M _{base} = 88 approx. [kg]	
Slide (plates + carriages)	M _{slide} = 44 approx. [kg]	
Beam (incl. guide rails and rack)	q _y = 31 approx.	q _z = 15 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$



Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 170 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 90 / Stroke / Length / X / FRD / ...

25 Kg 80 Kg
High Cycle Rate Low Cycle Rate

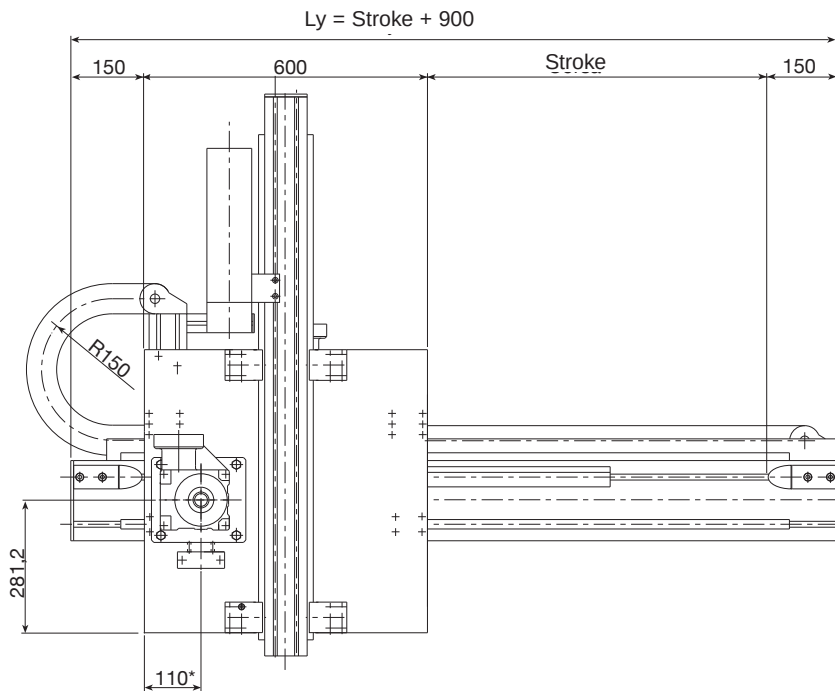

* For indication only, variable according to the gearbox chosen

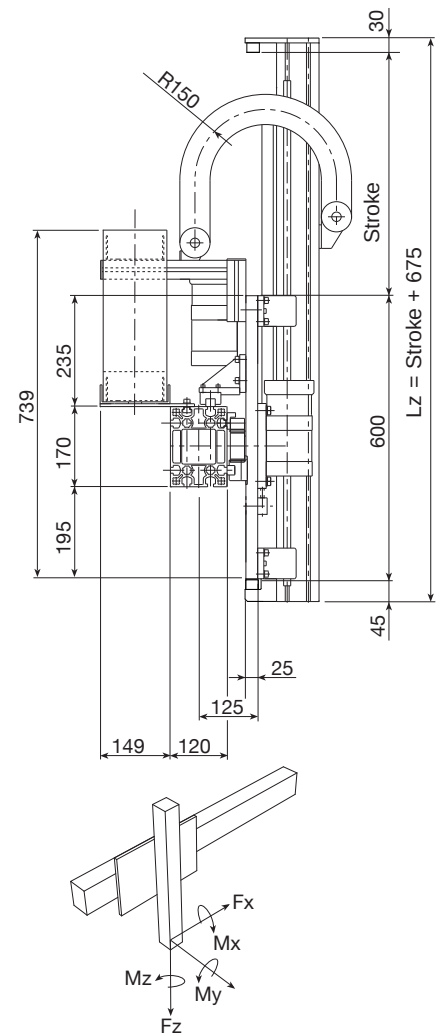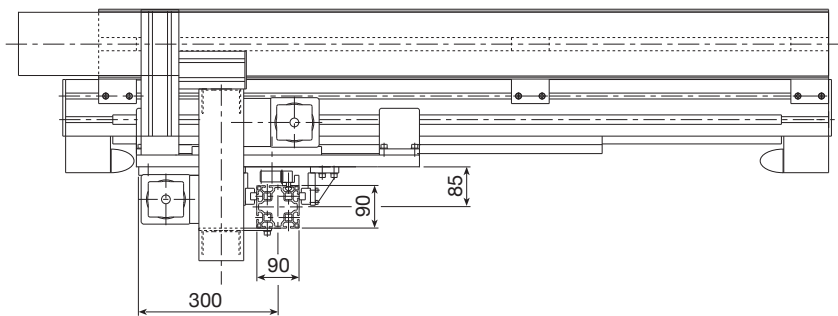

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	3.5	3.5 [m/s]
Max. acceleration	10	7 [m/s ²]
Repeatability	-	± 0.1 [mm]
Beam max. length without joint	6,000	6,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PASM 2/1	1,170	1,440	320	3,200	2,300

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Statyca	E01-4
Rack (tempered, helical teeth, ground: module KSD)	module 3	module 2 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 20	size 15
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	63.66 - (89.13)	44.56 - (63.66) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	M _{base} = 89 approx. [kg]	
Slide (plates + carriages)	M _{slide} = 43 approx [kg]	
Beam (incl. guide rails and rack)	q _y = 29 approx.	q _z = 14 approx. [kg/m]

Formules:


Actual load: $P_{eff.} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)



PAR 3/1

Y-Axis / P / A / R / Q / 200 / Stroke / Length / FND / ...
Z-Axis / P / A / R / Q / 100 / Stroke / Length / X / FND / ...

25 Kg **PC** 100 Kg
High Cycle Rate Low Cycle Rate

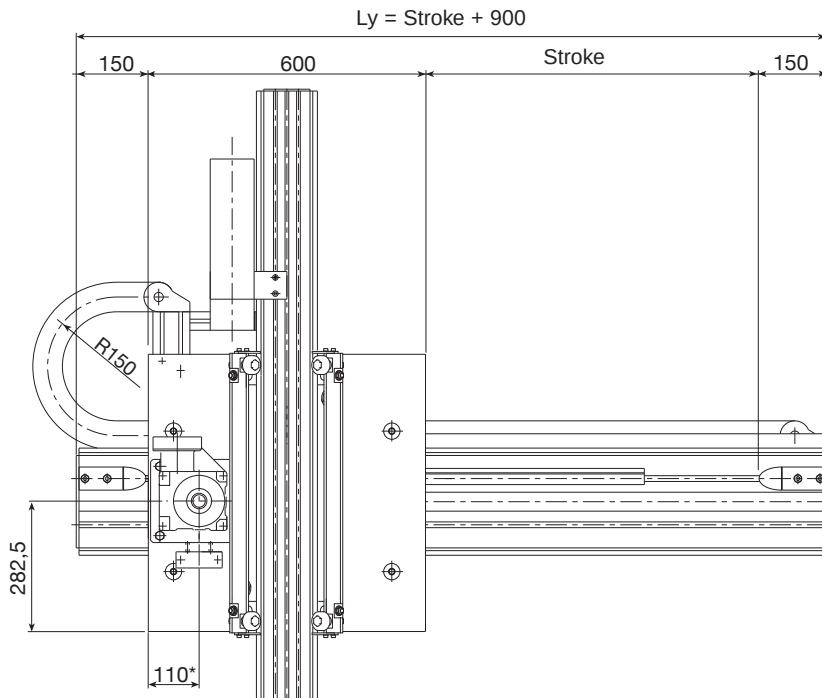

* For indication only, variable according to the gearbox chosen

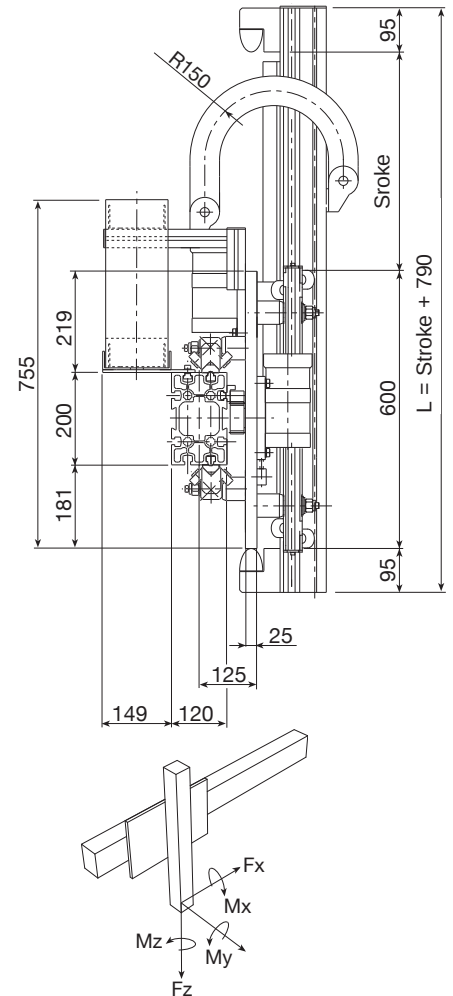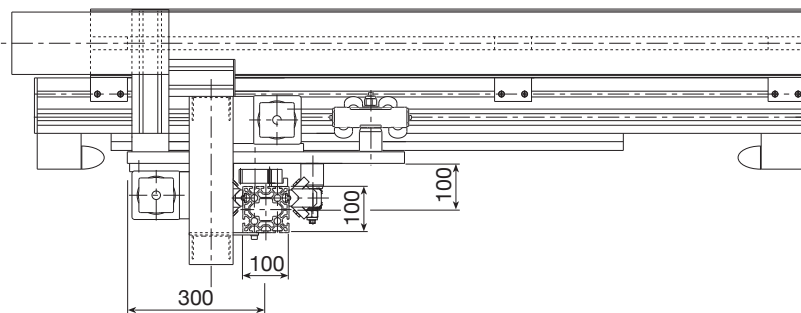

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	3	3 [m/s]
Max. acceleration	7	7 [m/s ²]
Repeatability	-	±0.2 [mm]
Beam max. length without joint	8,000	6,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PAR 3/1	1,115	1,520	352	3,200	2,400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Valyda	MA1-5
Rack (tempered, helical teeth: module KTD)	module 3	module 3 [mm ²]
Guide rails	35x16 (hardened and polished)	35x16 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø40	2 roller slides with 4 rollers Ø40
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter type ND	63.66 - (89.13)	63.66 - (89.13) [mm]

Weights	Y-axis	Z-axis
"Base" model (stroke _x and stroke _z =0)	M _{base} = 111 approx.	[kg]
Slide (plates + carriages)	M _{slide} = 54 approx.	[kg]
Beam (incl. guide rails and rack)	q _y = 35 approx.	q _z = 24 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } Pc$




Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 200 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 100 / Stroke / Length / X / FRD / ...

25 Kg **PC** 100 Kg
High Cycle Rate Low Cycle Rate

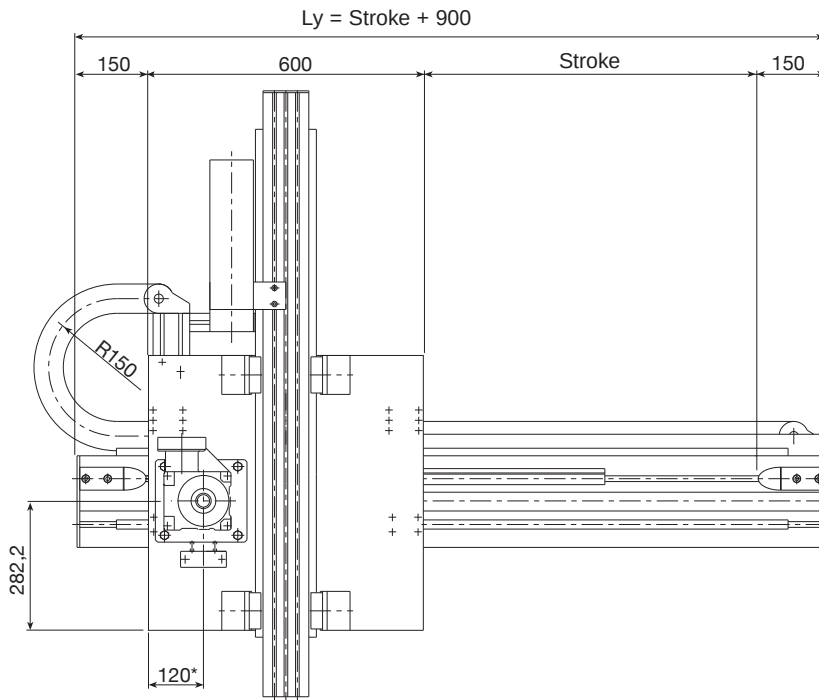

* For indication only, variable according to the gearbox chosen

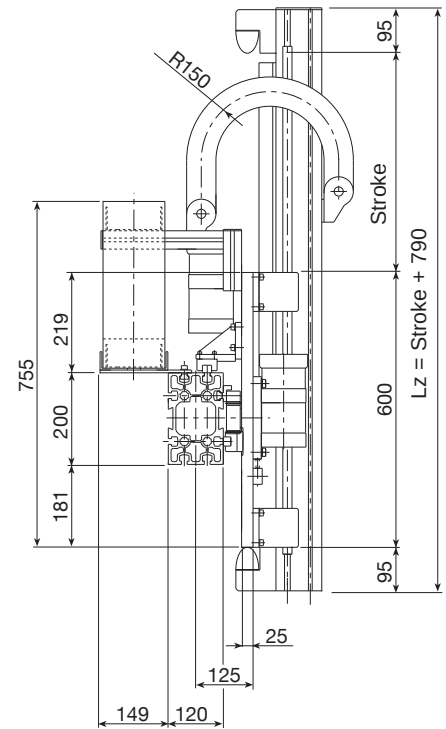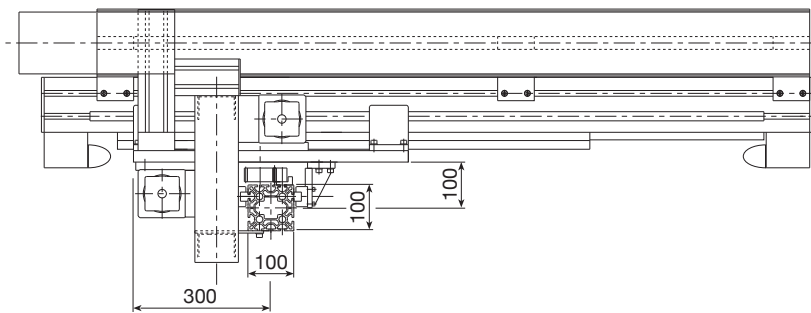

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	3	3 [m/s]
Max. acceleration	7	7 [m/s ²]
Repeatability	-	± 0.1 [mm]
Beam max. length without joint	12,000	6,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PASM 3/1	1,280	1,890	485	3,200	2,400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Valyda	MA1-5
Rack (tempered, helical teeth, ground: module KSD)	module 3	module 3 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 20	size 20
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	63.66 - (89.13)	63.66 - (89.13) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	M _{base} = 100 approx. [kg]	
Slide (plates + carriages)	M _{slide} = 45 approx. [kg]	
Beam (incl. guide rails and rack)	q _y = 33 approx.	q _z = 21 approx. [kg/m]

Formules:


Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } Pc$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)




PAR 4/1

Y-Axis / P / A / R / P / 200 / Stroke / Length / FND / ...
Z-Axis / P / A / R / Q / 100 / Stroke / Length / X / FND / ...

25 Kg **PC** 100 Kg
High Cycle Rate Low Cycle Rate

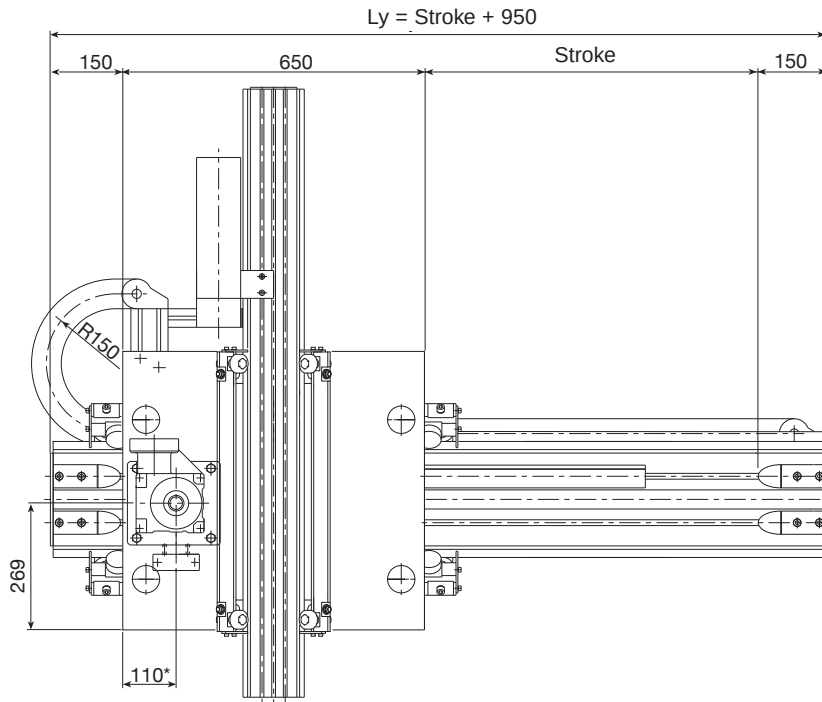

* For indication only, variable according to the gearbox chosen

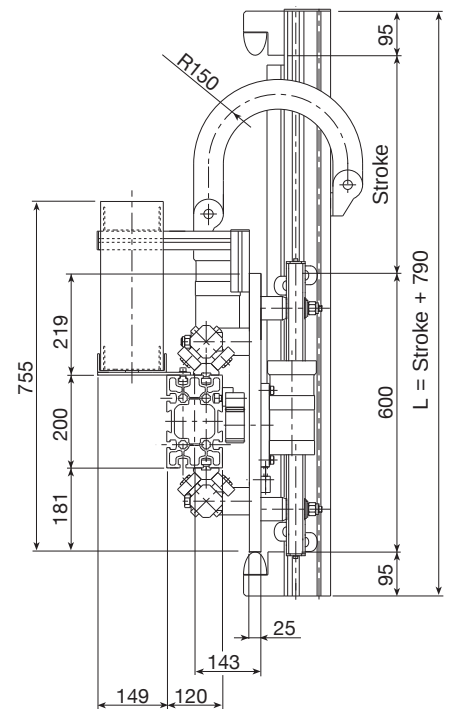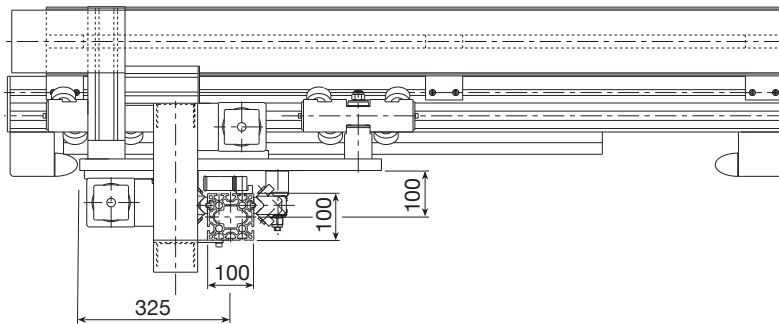

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	3	3 [m/s]
Max. acceleration	7	7 [m/s ²]
Repeatability	-	± 0.5 [mm]
Beam max. length without joint	12,000	6,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PAR 4/1	1520	1520	352	4250	2400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Valyda	MA1-5
Rack (tempered, helical teeth: module KTD)	module 4	module 3 [mm ²]
Guide rails	55x25 (hardened and polished)	35x16 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø52	2 roller slides with 4 rollers Ø40
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10)	63.66 - (89.13) [mm]

Weights	Y-axis	Z-axis
"Base" model (stroke_x and $\text{stroke}_z=0$)	$M_{\text{base}} = 140$ approx.	[kg]
Slide (plates + carriages)	$M_{\text{slide}} = 69$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_y = 48$ approx.	$q_z = 24$ approx. [kg/m]


Formules:

Actual load: $P_{\text{eff.}} = P_{\text{max}} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$




Module total weight: $M_{\text{tot}} = M_{\text{base}} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 200 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 100 / Stroke / Length / X / FRD / ...

25 Kg **PC** 100 Kg
High Cycle Rate Low Cycle Rate

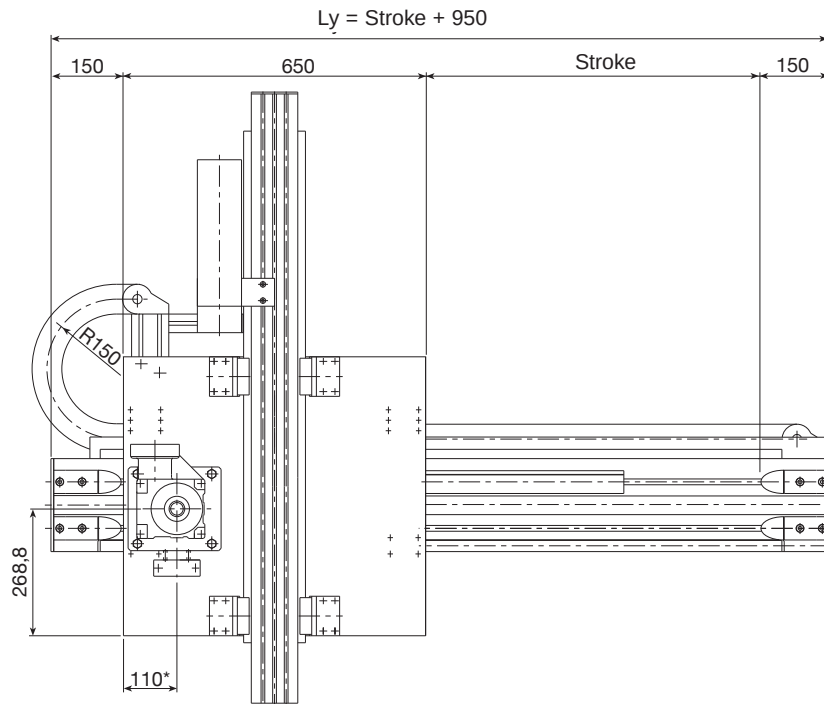

* For indication only, variable according to the gearbox chosen

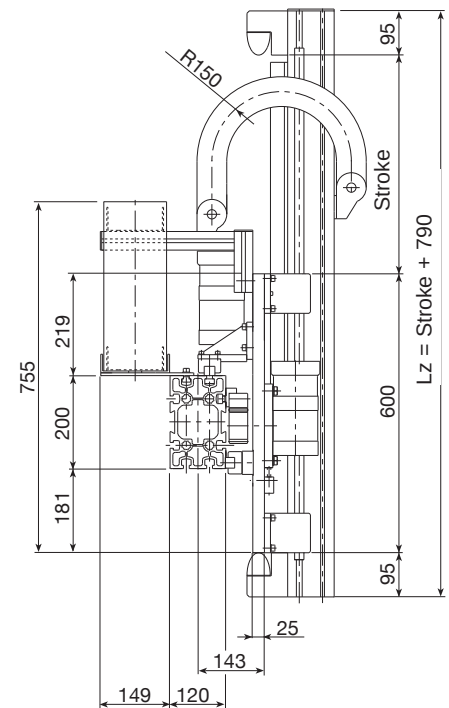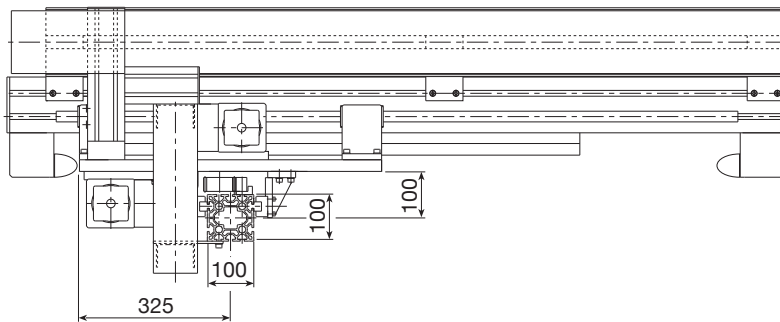

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	3	3
		[m/s]
Max. acceleration	7	7
		[m/s ²]
Repeatability	-	± 0.1
		[mm]
Beam max. length without joint	12,000	6,000
		[mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PASM 4/1	1,700	1,890	485	4,250	2,400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Valyda	MA1-5
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 3
		[mm ²]
Translation: 4 caged ball roller slides and guide rails	size 25	size 20
Room available for energy chain	115x45	75x45
		[mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	63.66 - (89.13)
		[mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)		M _{base} = 121 approx.
		[kg]
Slide (plates + carriages)		M _{slide} = 59 approx.
		[kg]
Beam (incl. guide rails and rack)	q _y = 40 approx.	q _z = 21 approx.
		[kg/m]

Formules:


Actual load: $P_{eff} = P_{max} - (Lz - 1,600)/1,000 \cdot q_z < \text{of } Pc$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z)/1,000$ (Stroke_x and stroke_z in mm.)




PAR 5/2

Y-Axis / P / A / R / P / 220 / Stroke / Length / FND / ...
Z-Axis / P / A / R / Q / 170 / Stroke / Length / X / FND / ...

60 Kg **PC** 200 Kg
High Cycle Rate Low Cycle Rate

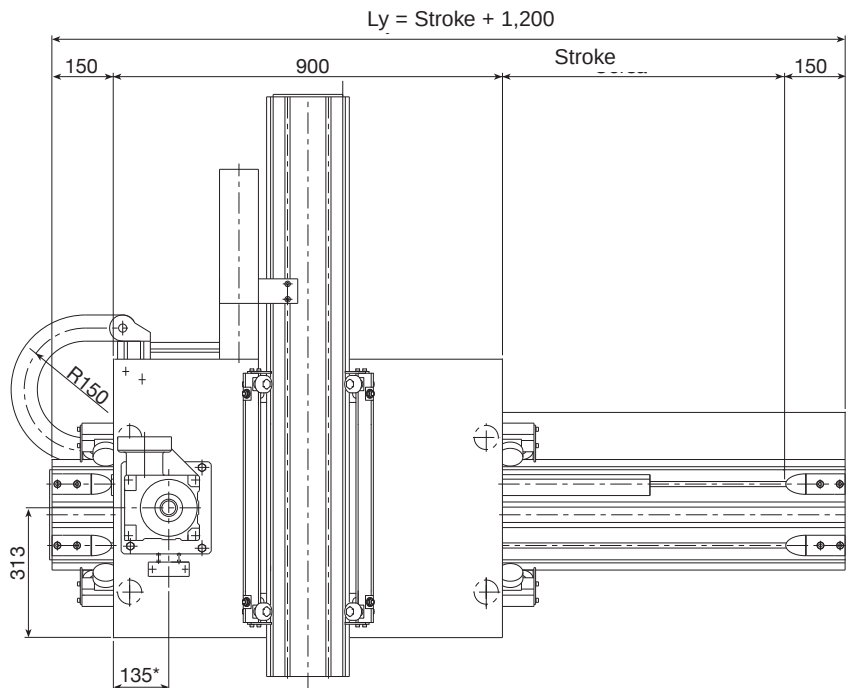

* For indication only, variable according to the gearbox chosen

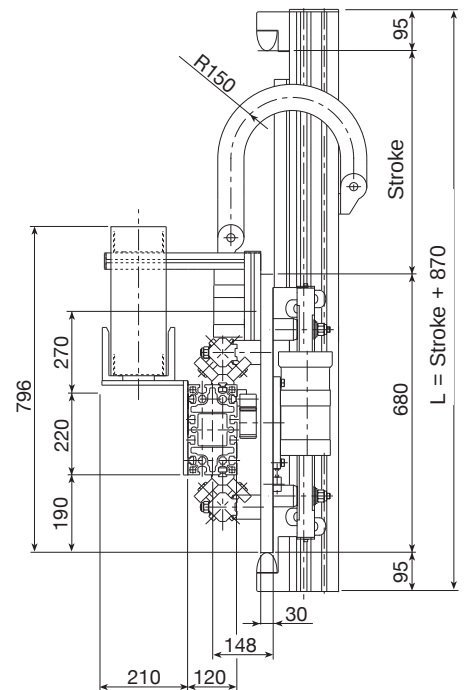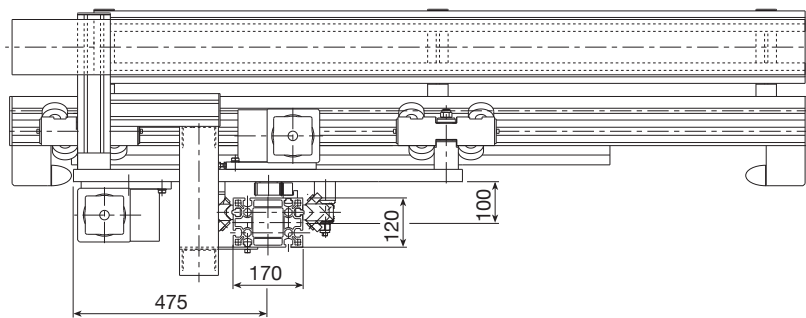

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	3	3 [m/s]
Max. acceleration	6	4 [m/s ²]
Repeatability	-	±0.25 [mm]
Beam max. length without joint	12,000	6,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PAR 5/2	1,520	1,520	580	4,670	3,580

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Logyca	Statyca
Rack (tempered, helical teeth: module KTD)	module 4	module 3 [mm ²]
Guide rails	55x25 (hardened and polished)	35x16 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø62	4 roller slides with 2 rollers Ø40
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10)	63.66 - (89.13) [mm]

Weights	Y-axis	Z-axis
"Base" model (stroke _x and stroke _z =0)	M _{base} = 195 approx.	[kg]
Slide (plates + carriages)	M _{slide} = 98 approx.	[kg]
Beam (incl. guide rails and rack)	q _y = 52 approx.	q _z = 31 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (Lz - 1,600) / 1,000 \cdot q_z < \text{of } Pc$



Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 220 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 170 / Stroke / Length / X / FRD / ...

60 Kg **PC** 200 Kg
High Cycle Rate Low Cycle Rate

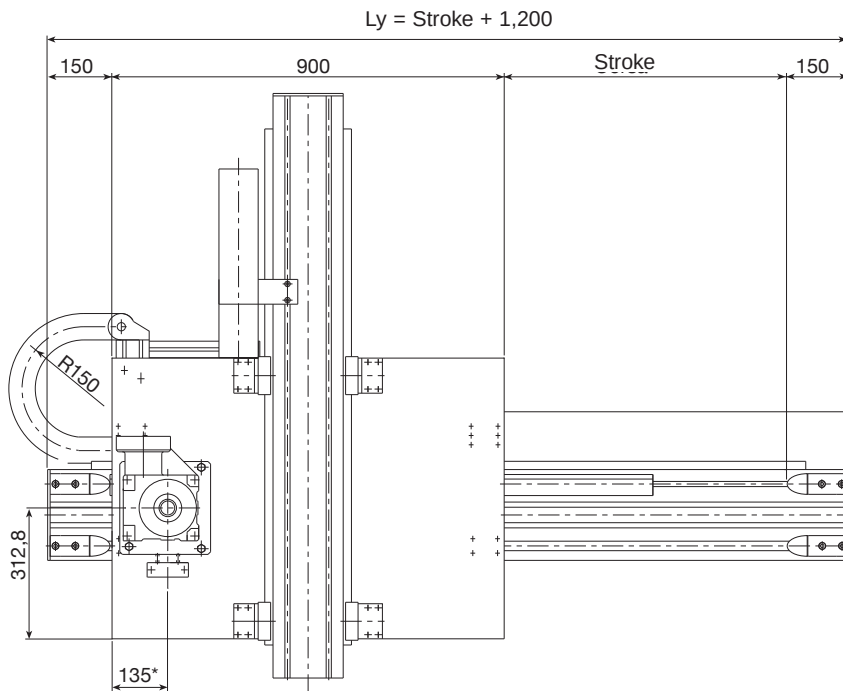

* For indication only, variable according to the gearbox chosen

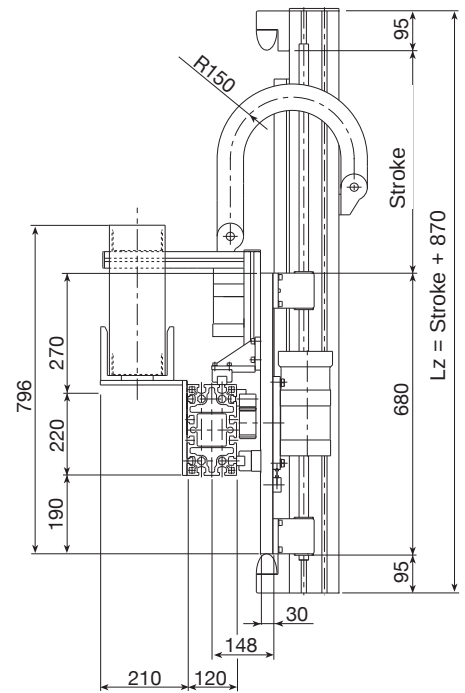

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	3	3 [m/s]
Max. acceleration	6	4 [m/s ²]
Repeatability	-	± 0.05 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PASM 5/2	2,060	3,320	1,210	4,670	3,580

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Logyca	Statyca
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 3 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 25	size 25
Room available for energy chain	115x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	63.66 - (89.13) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	M _{base} = 178 approx. [kg]	
Slide (plates + carriages)	M _{slide} = 95 approx. [kg]	
Beam (incl. guide rails and rack)	q _y = 44 approx.	q _z = 29 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (Lz - 1,600)/1,000 \cdot q_z < \text{of } Pc$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z)/1,000$ (Stroke_x and stroke_z in mm.)

PAR 6/2

Y-Axis / P / A / R / P / 280 / Stroke / Length / FND / ...
Z-Axis / P / A / R / Q / 200 / Stroke / Length / X / FND / ...

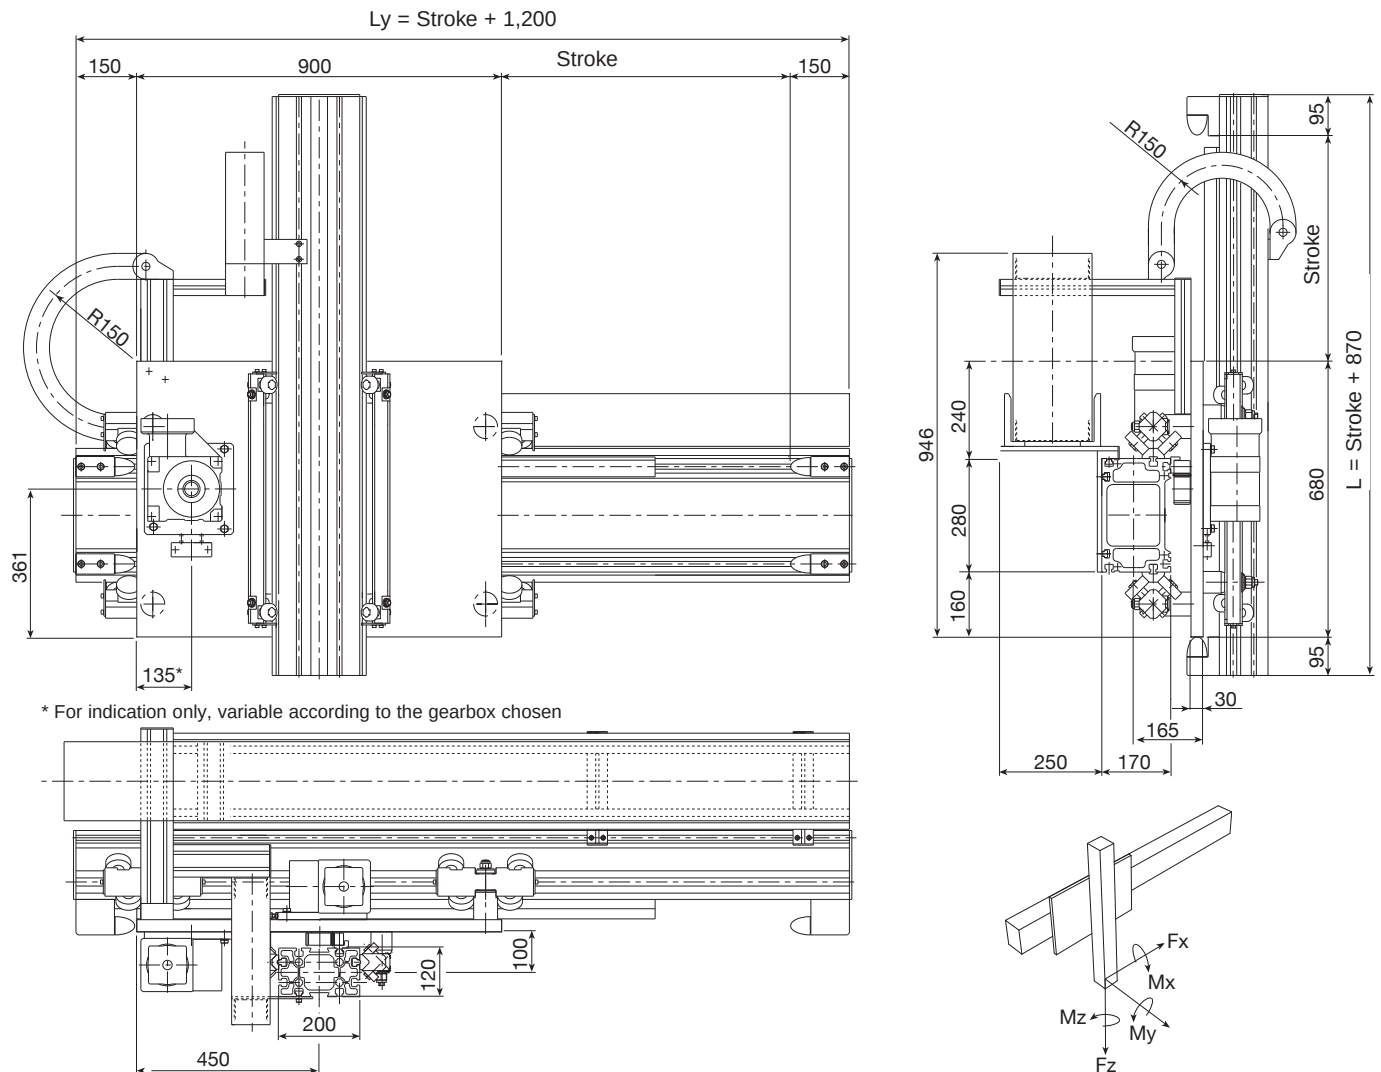

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	3	3 [m/s]
Max. acceleration	4	4 [m/s ²]
Repeatability	-	±0.25 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PAR 6/2	1,520	1,520	670	3,585	3,665

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratyca	Valyda
Rack (tempered, helical teeth: module KTD)	module 4	module 3 [mm ²]
Guide rails	55x25 (hardened and polished)	35x16 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø62	2 roller slides with 4 rollers Ø40
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10)	63.66 - (89.13) [mm]


Weights	Y-axis	Z-axis
"Base" model ($stroke_x$ and $stroke_z=0$)	$M_{base} = 220$ approx.	[kg]
Slide (plates + carriages)	$M_{slide} = 99$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_y = 66$ approx.	$q_z = 35$ approx. [kg/m]

Formules:




Actual load: $P_{eff.} = P_{max} - (L_z - 1,600)/1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot stroke_y + q_z \cdot stroke_z)/1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 280 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 200 / Stroke / Length / X / FRD / ...

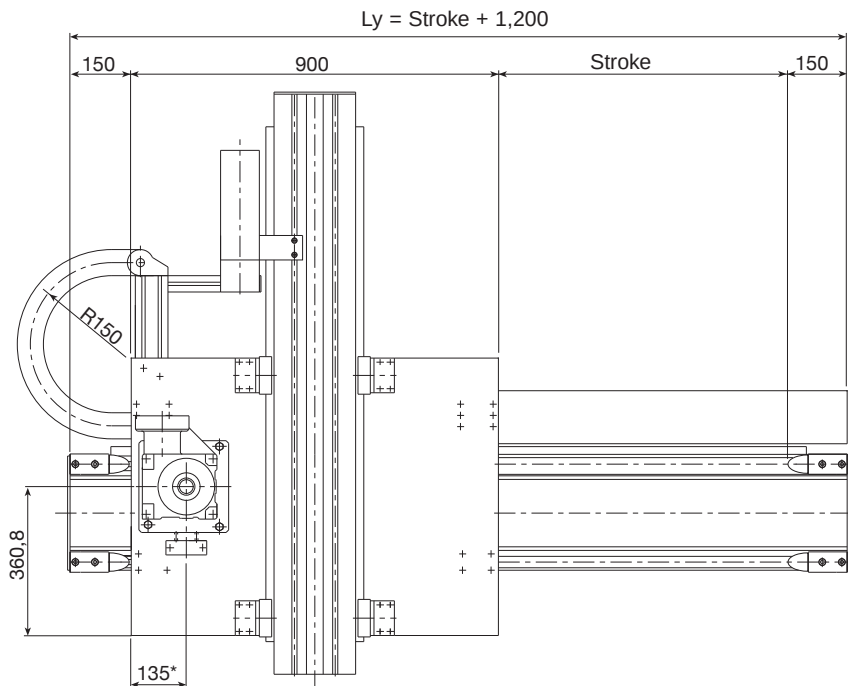

* For indication only, variable according to the gearbox chosen

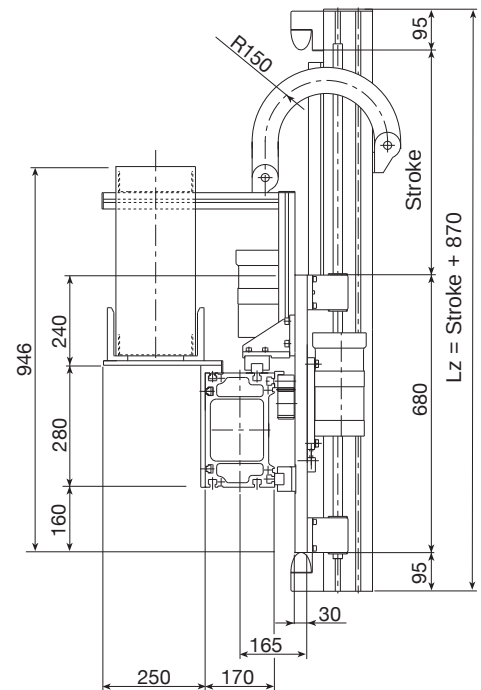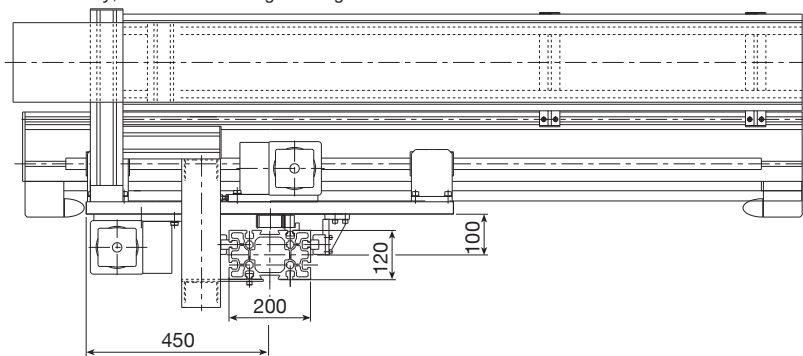

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	3	3 [m/s]
Max. acceleration	4	4 [m/s ²]
Repeatability	-	± 0.05 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PASM 6/2	3,000	3,310	1,375	3,585	3,665

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratycia	Valyda
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 3 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 30	size 25
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	63.66 - (89.13) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	$M_{base} = 202$ approx. [kg]	
Slide (plates + carriages)	$M_{slide} = 86$ approx. [kg]	
Beam (incl. guide rails and rack)	$q_y = 60$ approx.	$q_z = 34$ approx. [kg/m]


Formules:

Actual load: $P_{eff.} = P_{max} - (L_z - 1,600)/1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z)/1,000$ (Stroke_x and stroke_z in mm.)

PAR 6/4

Y-Axis / P / A / R / P / 280 / Stroke / Length / FND / ...
Z-Axis / P / A / R / P / 200 / Stroke / Length / X / FND / ...

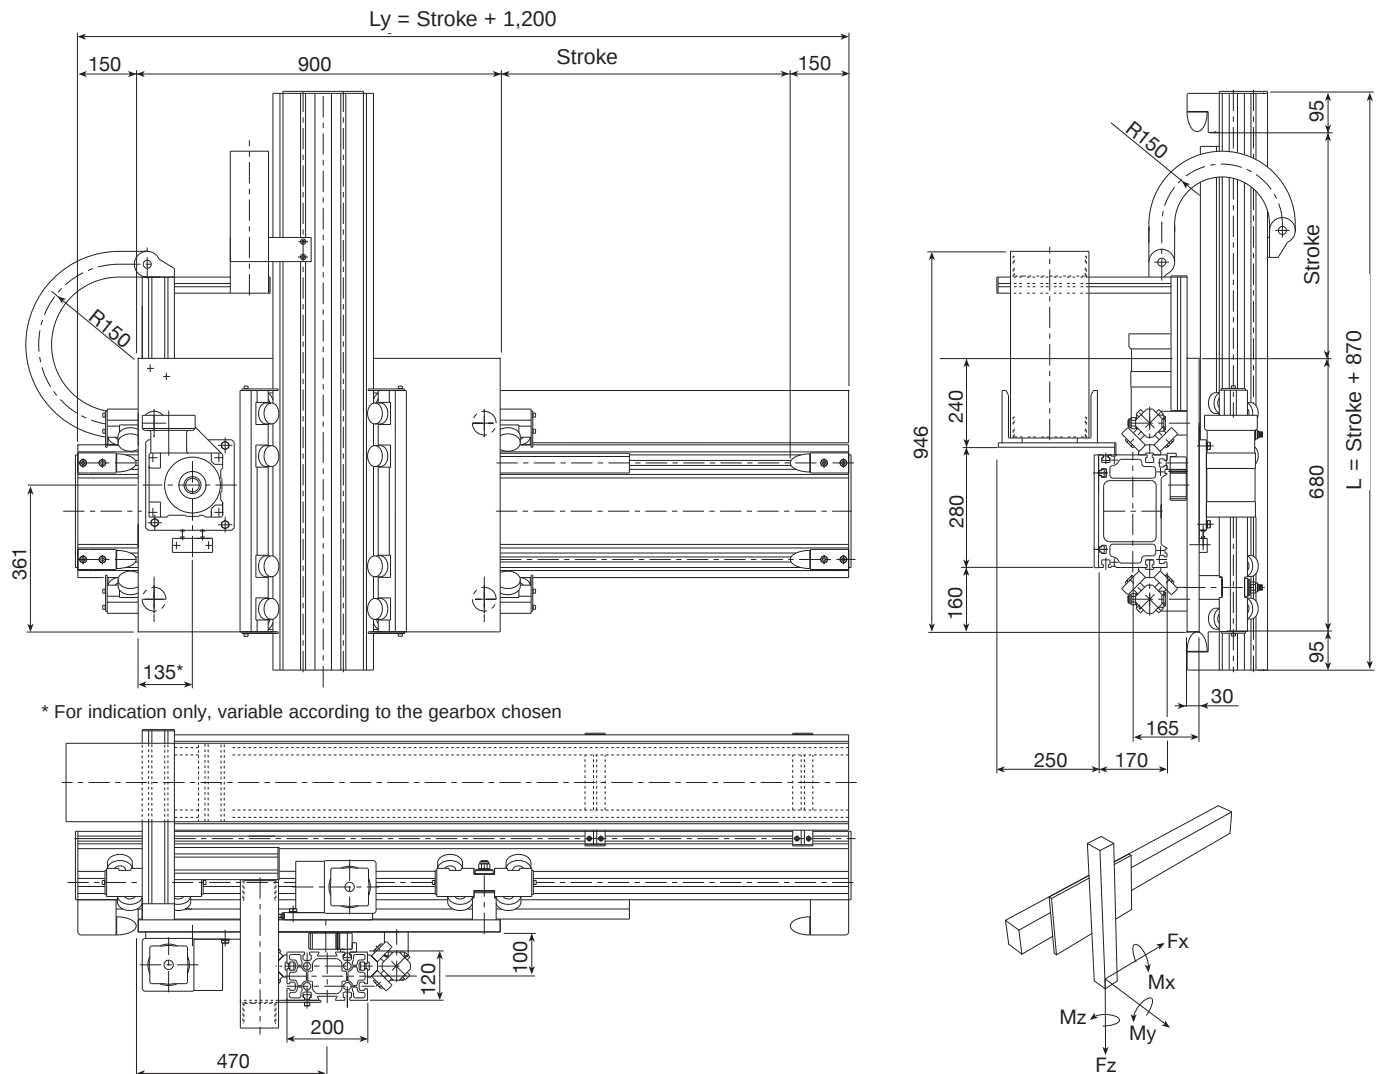

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	3	2 [m/s]
Max. acceleration	4	3 [m/s ²]
Repeatability	-	± 0.25 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PAR 6/4	2,435	2,435	1,200	3,585	6,350

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratyca	Valyda
Rack (tempered, helical teeth: module KTD)	module 4	module 4 [mm ²]
Guide rails	55x25 (hardened and polished)	55x25 (hardened and polished)
Translation	4 roller slides with 4 rollers Ø62	2 roller slides with 6 rollers Ø52
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10)	76.39 - (106.10) [mm]


Weights	Y-axis	Z-axis
"Base" model ($stroke_x$ and $stroke_z=0$)	$M_{base} = 244$ approx.	[kg]
Slide (plates + carriages)	$M_{slide} = 112$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_y = 66$ approx.	$q_z = 48$ approx. [kg/m]

Formules:




Actual load: $P_{eff.} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot stroke_y + q_z \cdot stroke_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 280 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 200 / Stroke / Length / X / FRD / ...

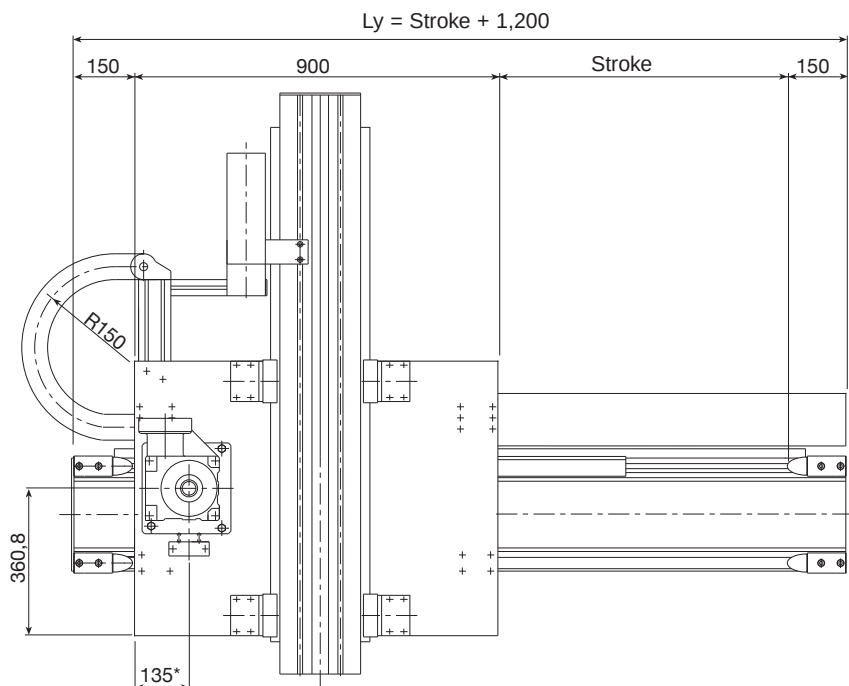

* For indication only, variable according to the gearbox chosen

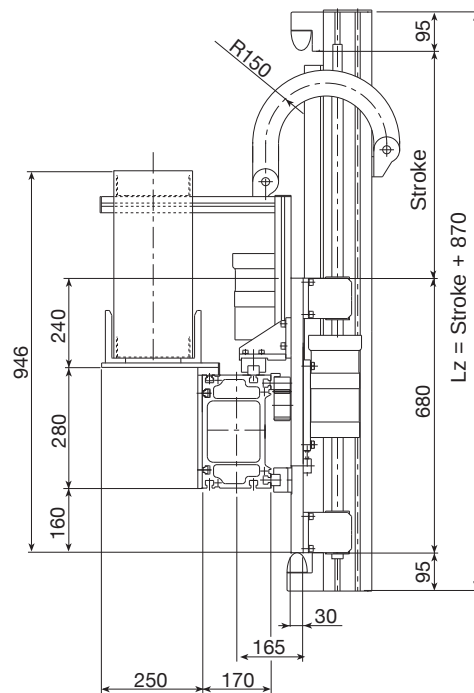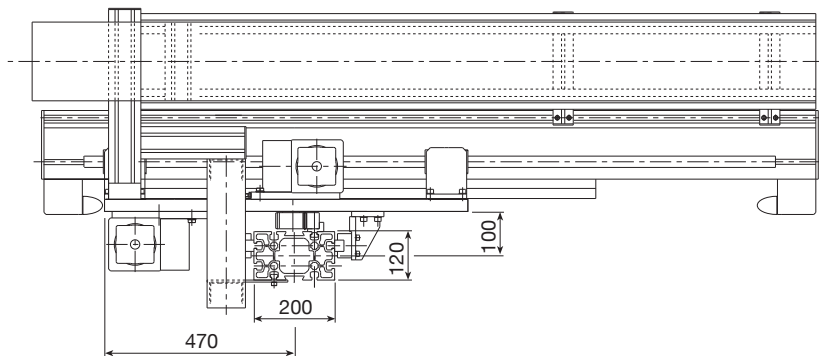

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	3	2 [m/s]
Max. acceleration	4	3 [m/s ²]
Repeatability	-	± 0.05 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PASM 6/4	3,000	3,310	1,375	3,585	6,350

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratycia	E01-4
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 4 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 30	size 25
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	76.39 - (106.10) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)		$M_{base} = 217$ approx. [kg]
Slide (plates + carriages)		$M_{slide} = 105$ approx. [kg]
Beam (incl. guide rails and rack)	$q_y = 60$ approx.	$q_z = 39$ approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (L_z - 1,600)/1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z)/1,000$ (Stroke_x and stroke_z in mm.)

PAR 8/3

Y-Axis / P / A / R / P / 280 / Stroke / Length / FND / ...
Z-Axis / P / A / R / P / 200 / Stroke / Length / X / FND / ...

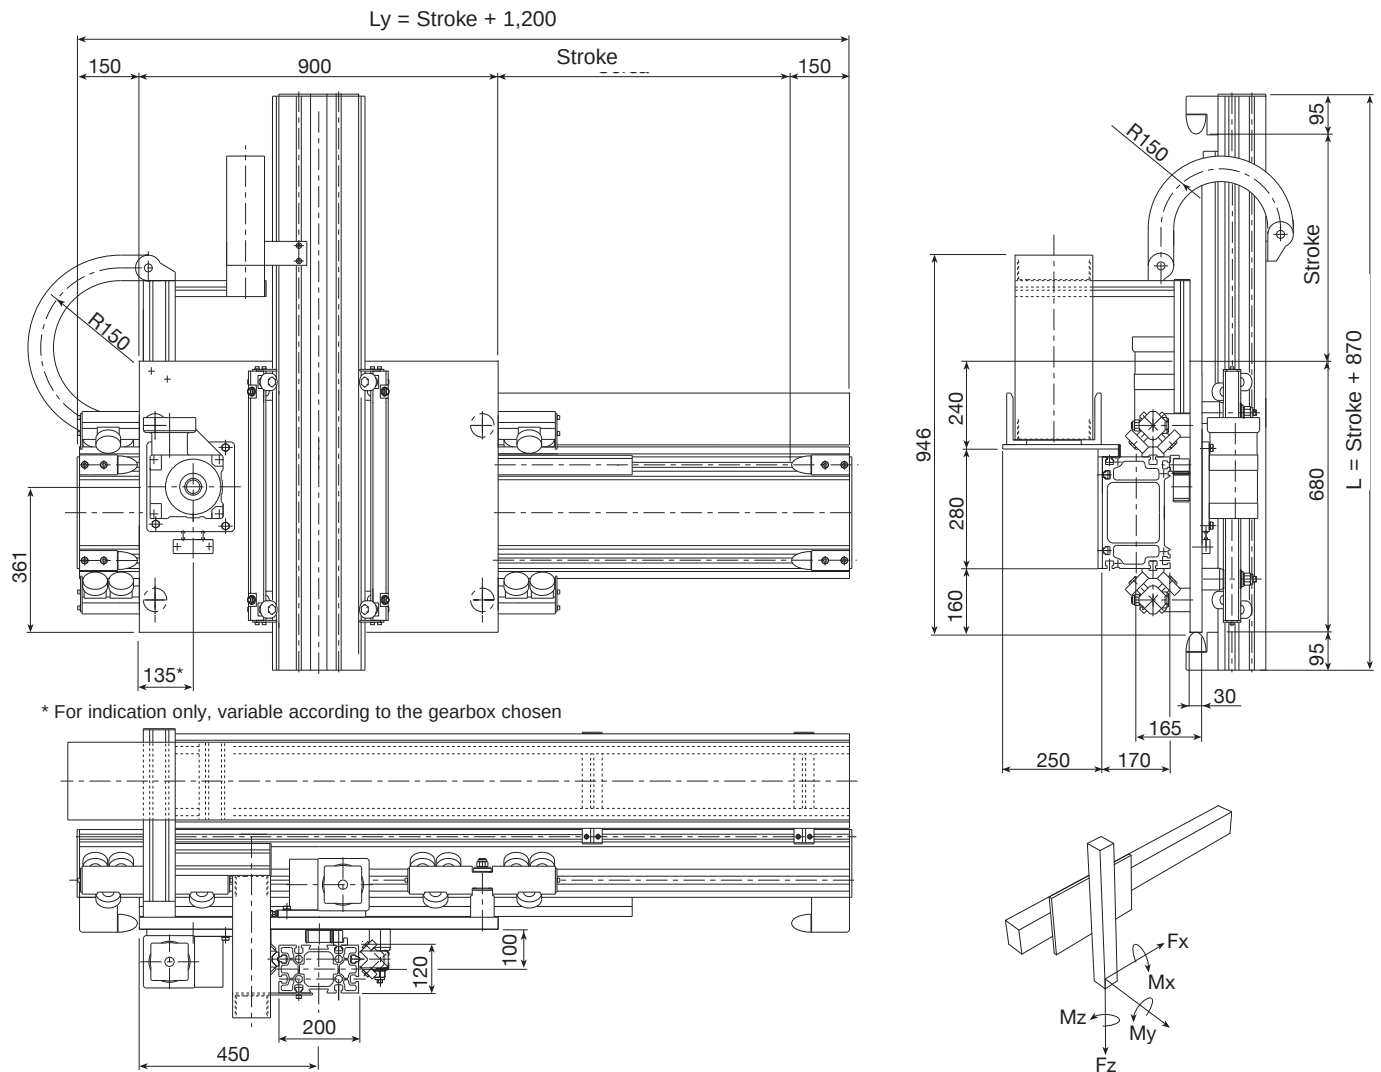

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	2.5	2
Max. acceleration	2.5	3
Repeatability	-	± 0.3
Beam max. length without joint	12,000	12,000

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PAR 8/3	1520	1520	670	3100	4740

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratyca	Valyda
Rack (tempered, helical teeth: module KTD)	module 4	module 3
Guide rails	55x25 (hardened and polished)	35x16 (hardened and polished)
Translation	4 roller slides with 6 rollers Ø62	2 roller slides with 4 rollers Ø40
Room available for energy chain	175x45	75x45
Pinion pitch diameter type ND	76.39 - (106.10)	63.66 - (89.13)


Weights	Y-axis	Z-axis
"Base" model ($stroke_x$ and $stroke_z=0$)	$M_{base} = 232$ approx.	
Slide (plates + carriages)	$M_{slide} = 111$ approx.	
Beam (incl. guide rails and rack)	$q_y = 66$ approx.	$q_z = 35$ approx.

Formules:




Actual load: $P_{eff.} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < of P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot stroke_y + q_z \cdot stroke_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 280 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / 200 / M / Stroke / Length / X / FRD / ...

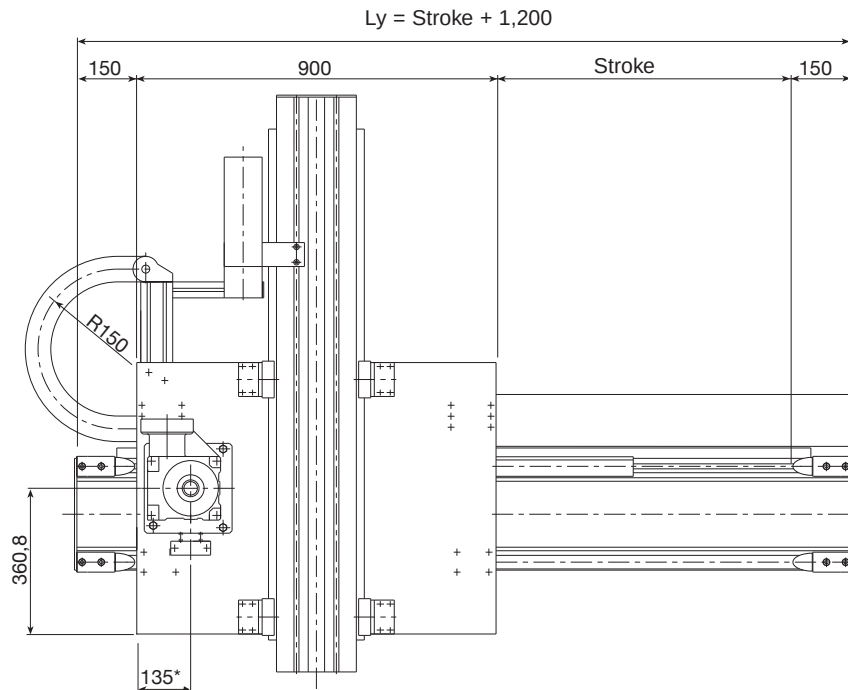

* For indication only, variable according to the gearbox chosen

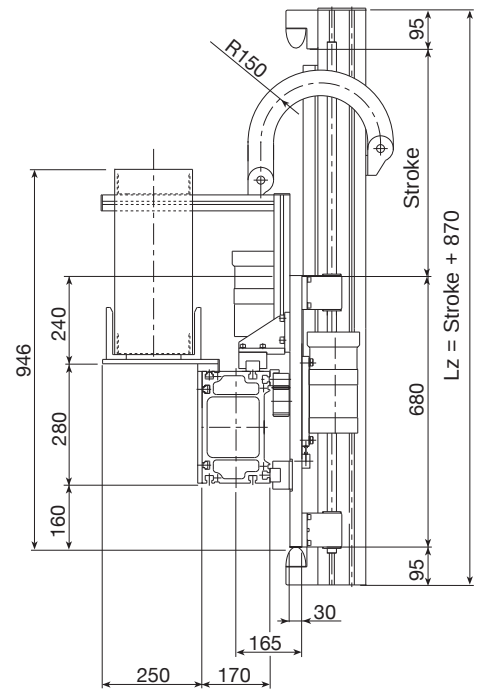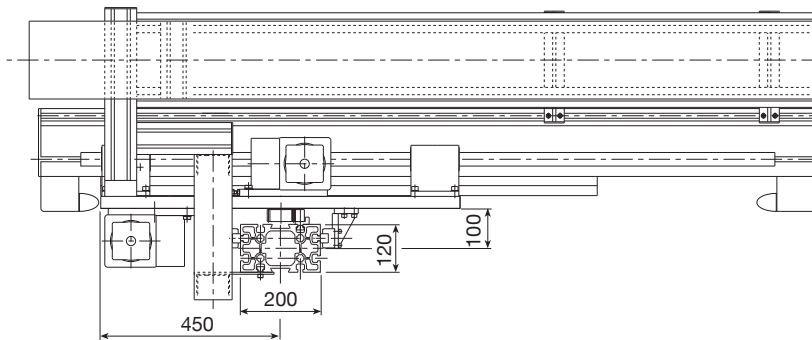

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	2.5	2.5 [m/s]
Max. acceleration	2.5	3 [m/s ²]
Repeatability	-	± 0.1 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PASM 8/3	3,000	3,310	1,375	3,100	4,740

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratyca	Valyda
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 3 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 35	size 25
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	63.66 - (89.13) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	$M_{base} = 220$ approx.	[kg]
Slide (plates + carriages)	$M_{slide} = 102$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_y = 64$ approx.	$q_z = 34$ approx. [kg/m]

Formules:


Actual load: $P_{eff.} = P_{max} - (L_z - 1,600)/1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z)/1,000$ (Stroke_x and stroke_z in mm.)




PAR 8/6

Y-Axis / P / A / R / P / 280 / Stroke / Length / FND / ...
Z-Axis / P / A / R / P / 220 / Stroke / Length / X / FND / ...

250 Kg **PC** 600 Kg
High Cycle Rate Low Cycle Rate

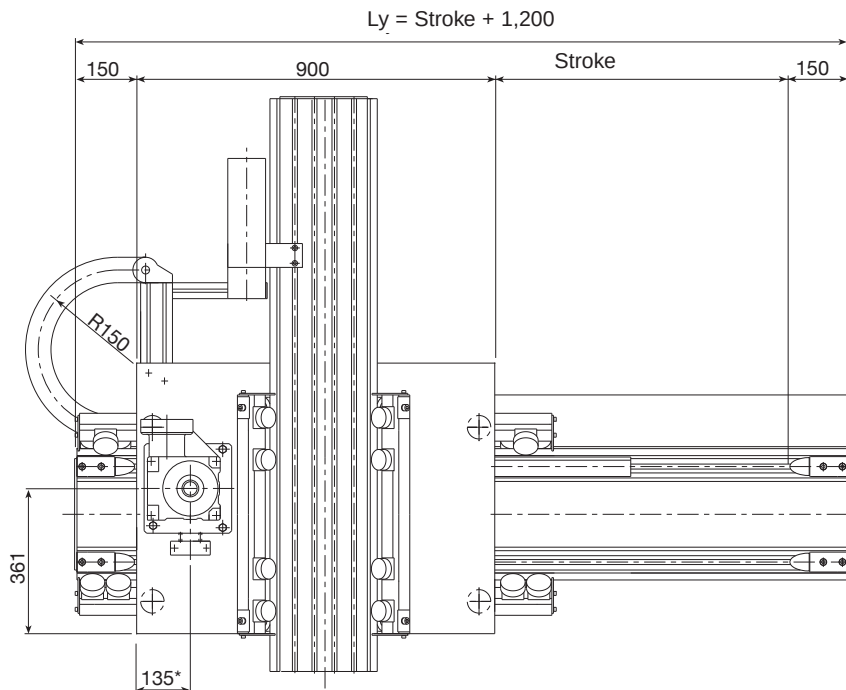

* For indication only, variable according to the gearbox chosen

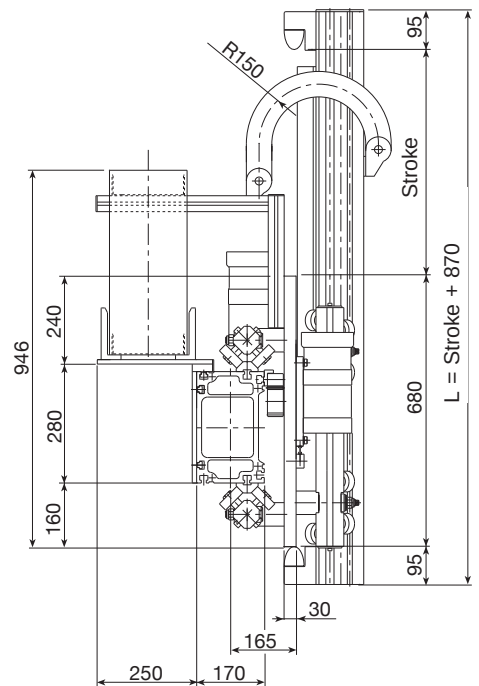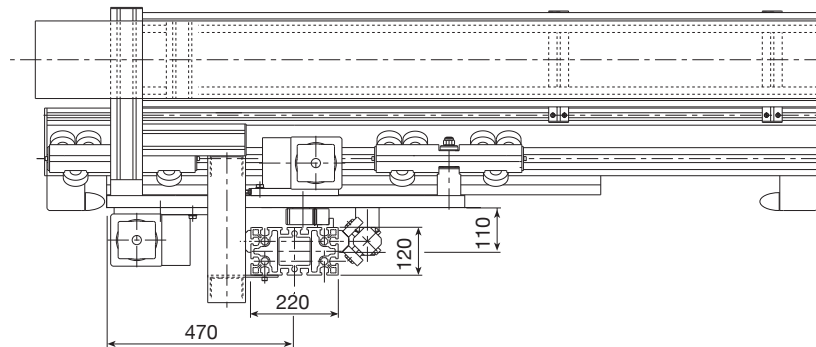

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	2	2 [m/s]
Max. acceleration	2	2 [m/s ²]
Repeatability	-	±0.25 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PAR 8/6	2,430	2,430	1,200	3,220	8,400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratyca	Logyca
Rack (tempered, helical teeth: module KTD)	module 4	module 4 [mm ²]
Guide rails	55x25 (hardened and polished)	55x25 (hardened and polished)
Translation	4 roller slides with 6 rollers Ø62	2 roller slides with 6 rollers Ø52
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10)	76.39 - (106.10) [mm]

Weights	Y-axis	Z-axis
"Base" model (stroke _x and stroke _z =0)	M _{base} = 260 approx.	[kg]
Slide (plates + carriages)	M _{slide} = 122 approx.	[kg]
Beam (incl. guide rails and rack)	q _y = 66 approx.	q _z = 52 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } Pc$




Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 280 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 220 / Stroke / Length / X / FRD / ...

250 Kg **PC** 600 Kg
High Cycle Rate Low Cycle Rate

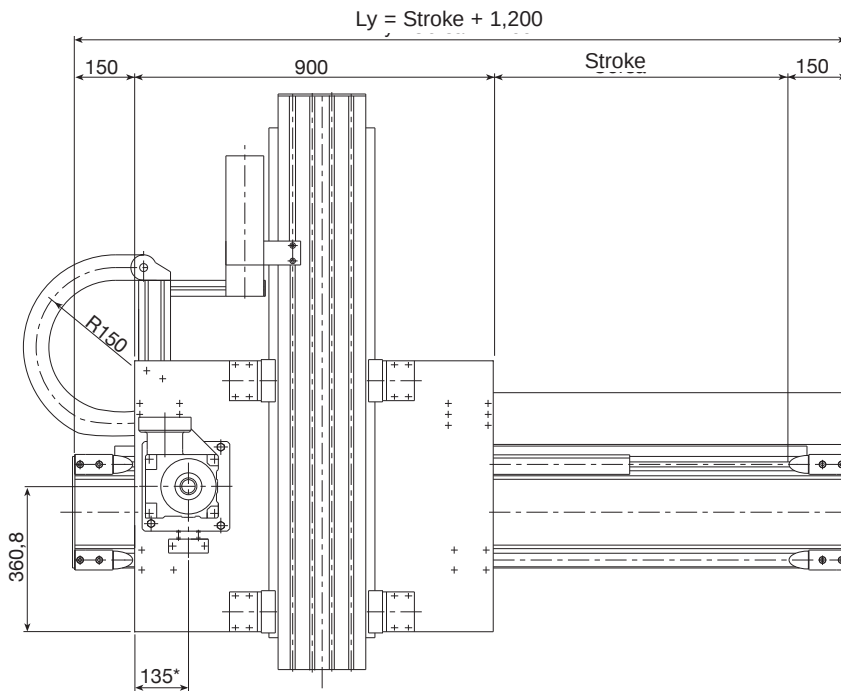

* For indication only, variable according to the gearbox chosen

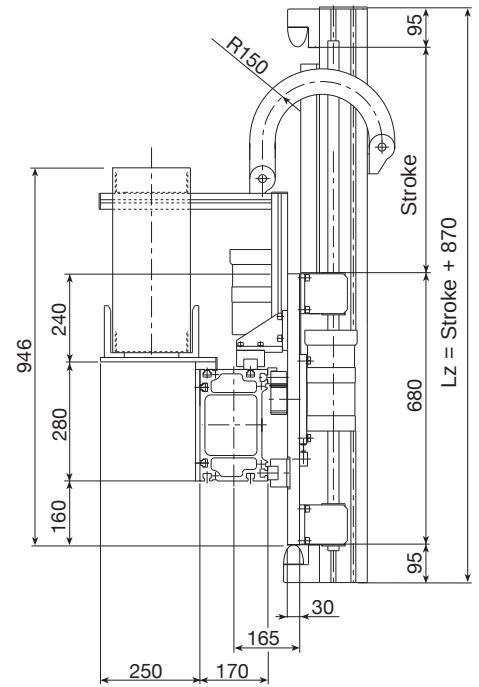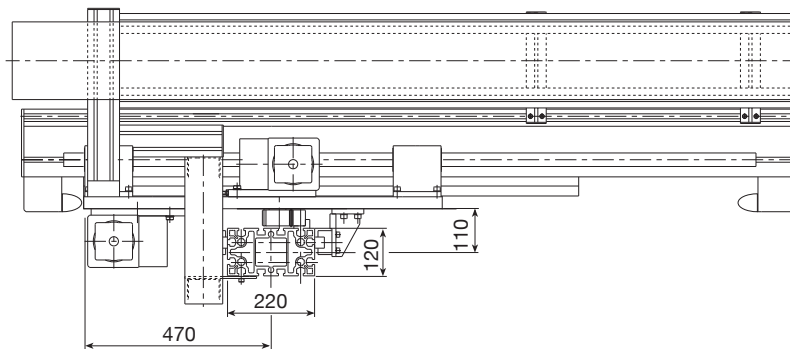

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	2	2 [m/s]
Max. acceleration	2	2 [m/s ²]
Repeatability	-	± 0.15 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PASM 8/6	4,330	4,790	2,090	3,220	8,400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Pratyca	Logyca
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 4 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 35	size 30
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	76.39 - (89.13) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	M _{base} = 234 approx.	[kg]
Slide (plates + carriages)	M _{slide} = 102 approx.	[kg]
Beam (incl. guide rails and rack)	q _y = 64 approx.	q _z = 46 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

PAR 10/6

Y-Axis / P / A / R / P / 360 / Stroke / Length / FND / ...
Z-Axis / P / A / R / P / 220 / Stroke / Length / X / FND / ...

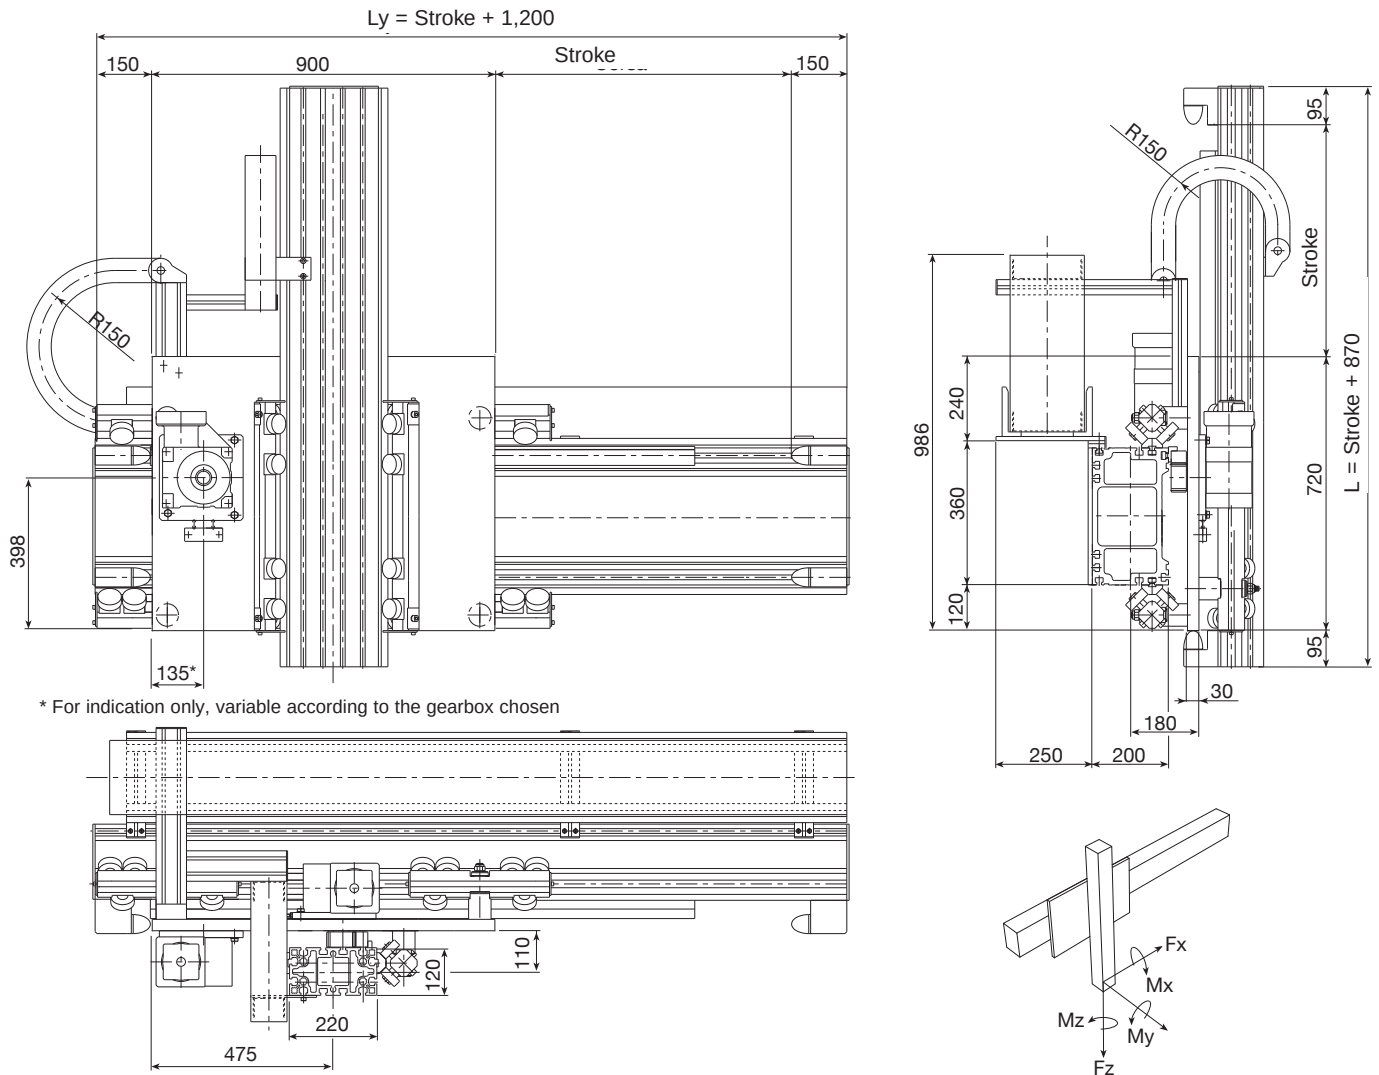

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	2.5	2 [m/s]
Max. acceleration	2	2 [m/s ²]
Repeatability	-	± 0.25 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PAR 10/6	2,435	2,435	1,200	3,185	8,400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Solyda	Logyca
Rack (tempered, helical teeth: module KTD)	module 4	module 4 [mm ²]
Guide rails	55x25 (hardened and polished)	55x25 (hardened and polished)
Translation	4 roller slides with 6 rollers Ø62	2 roller slides with 6 rollers Ø52
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter type ND	76.39 - (106.10)	76.39 - (106.10) [mm]


Weights	Y-axis	Z-axis
"Base" model ($stroke_x$ and $stroke_z=0$)	$M_{base} = 283$ approx.	[kg]
Slide (plates + carriages)	$M_{slide} = 122$ approx.	[kg]
Beam (incl. guide rails and rack)	$q_y = 85$ approx.	$q_z = 52$ approx. [kg/m]

Formules:




Actual load: $P_{eff.} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot stroke_y + q_z \cdot stroke_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 360 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 220 / Stroke / Length / X / FRD / ...

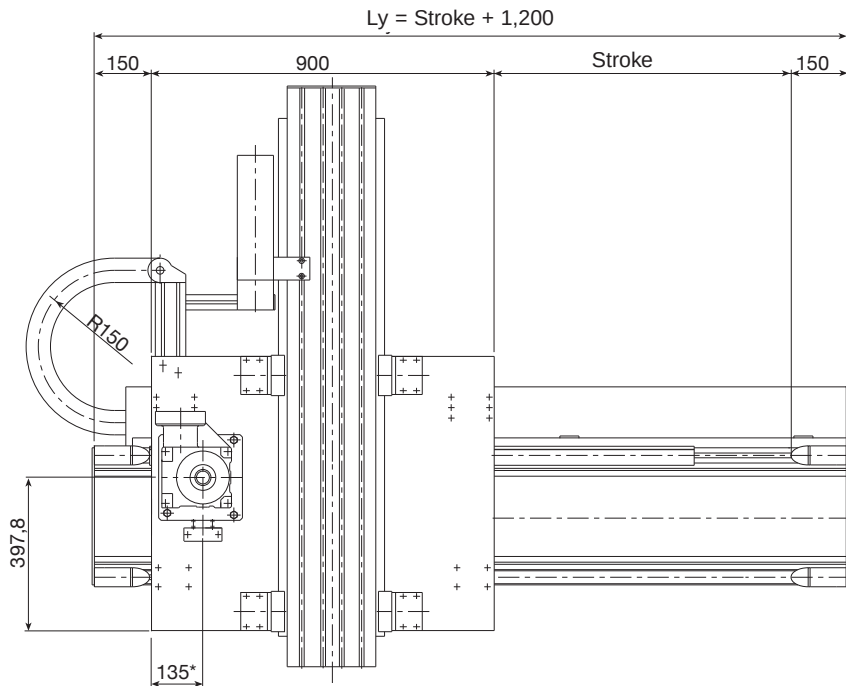

* For indication only, variable according to the gearbox chosen

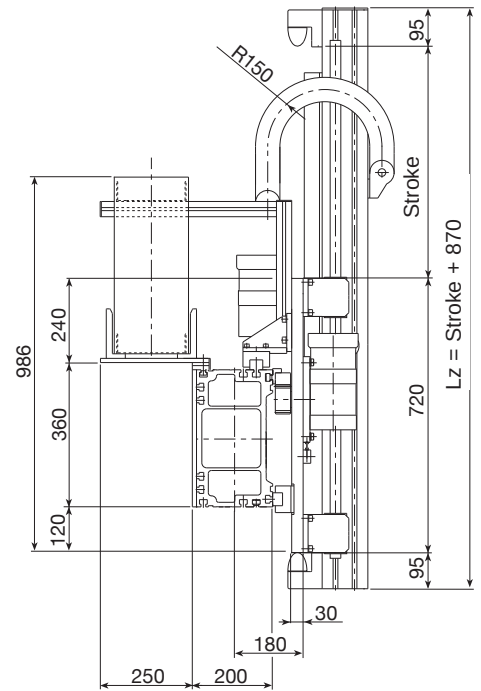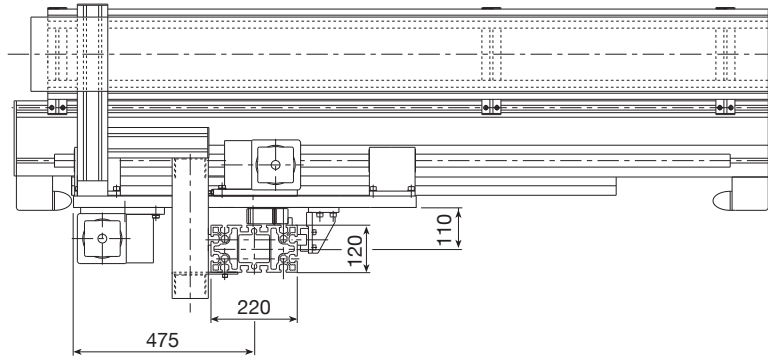

Performances	Y-axis	Z-axis
Max. load ($P_{c \max}$) with load on axis ($L_z \leq 1,600$ mm)		
Max. speed	2.5	2 [m/s]
Max. acceleration	2	2 [m/s ²]
Repeatability	-	± 0.15 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_z [N]
PASM10/6	4,560	5,050	2,090	3,185	8,400

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Solyda	Logyca
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 4 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 35	size 30
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	76.39 - (89.13) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)		$M_{base} = 260$ approx. [kg]
Slide (plates + carriages)		$M_{slide} = 102$ approx. [kg]
Beam (incl. guide rails and rack)	$q_y = 83$ approx.	$q_z = 46$ approx. [kg/m]

Formules:


Actual load: $P_{eff.} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } P_c$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)




PAR 10/8

Y-Axis / P / A / R / P / 360 / Stroke / Length / FND / ...
Z-Axis / P / A / R / P / 280 / Stroke / Length / X / FND / ...

400 Kg **PC** 800 Kg
High Cycle Rate Low Cycle Rate

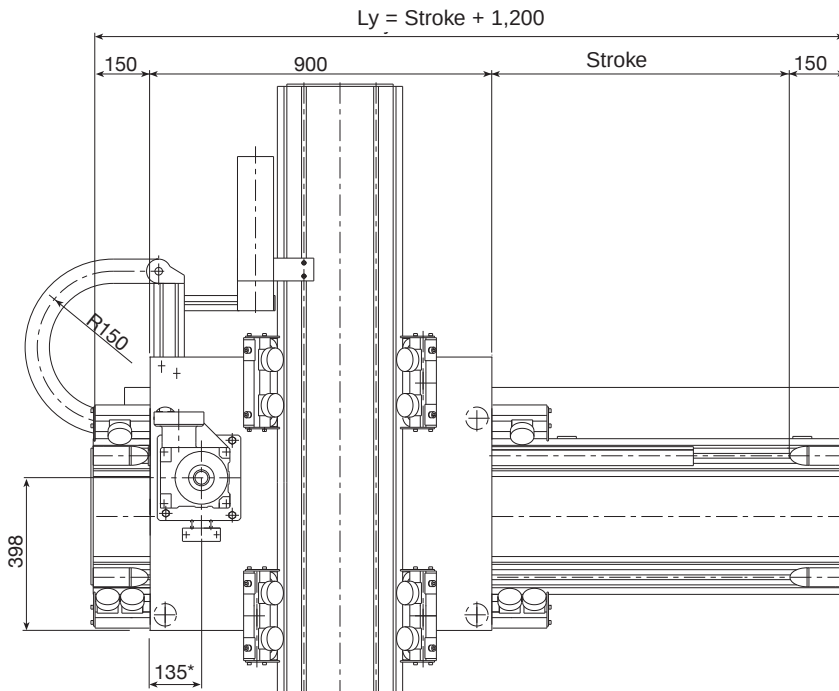

* For indication only, variable according to the gearbox chosen

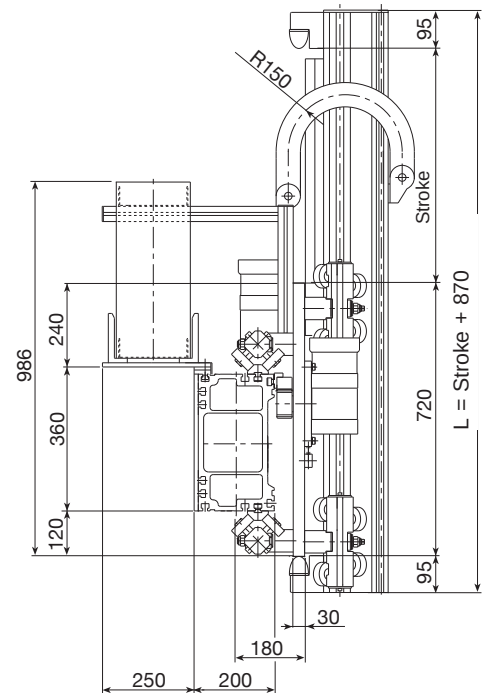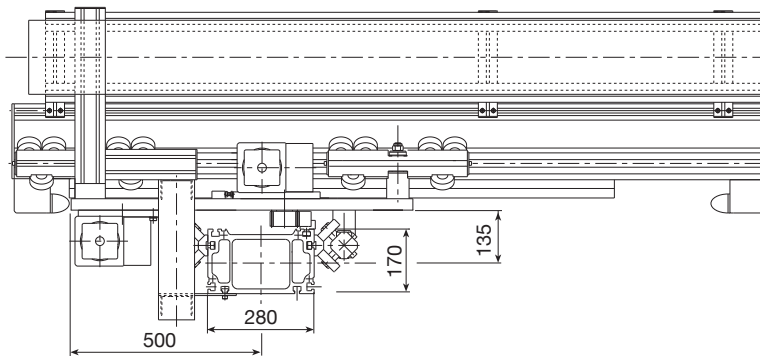

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	2	2
Max. acceleration	2	2
Repeatability	-	±0.25
Beam max. length without joint	12,000	12,000

** With vertical positioning of the unit, a partial load capacity compensation is required

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PAR 10/8	6,900	7,335	4,590	3,250	11,140

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.

The values shown can be achieved with roller slides with 6 rollers suitable for maximum performance (see page 63-64).

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Solyda	Pratycia
Rack (tempered, helical teeth: module KTD)	module 4	module 4
Guide rails	55x25 (hardened and polished)	55x25 (hardened and polished)
Translation	4 roller slides with 6 rollers Ø62	4 roller slides with 4 rollers Ø62
Room available for energy chain	175x45	75x45
Pinion pitch diameter type ND	76.39 - (106.10)	76.39 - (106.10)

Weights	Y-axis	Z-axis
"Base" model (stroke _x and stroke _z =0)	M _{base} = 300 approx.	[kg]
Slide (plates + carriages)	M _{slide} = 122 approx	[kg]
Beam (incl. guide rails and rack)	q _y = 85 approx.	q _z = 66 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (Lz - 1,600) / 1,000 \cdot q_z < \text{of } Pc$

Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Y-Axis / P / A / S / M / 360 / Stroke / Length / FRD / ...
Z-Axis / P / A / S / M / 280 / Stroke / Length / X / FRD / ...

400 Kg **PC** 800 Kg
High Cycle Rate Low Cycle Rate

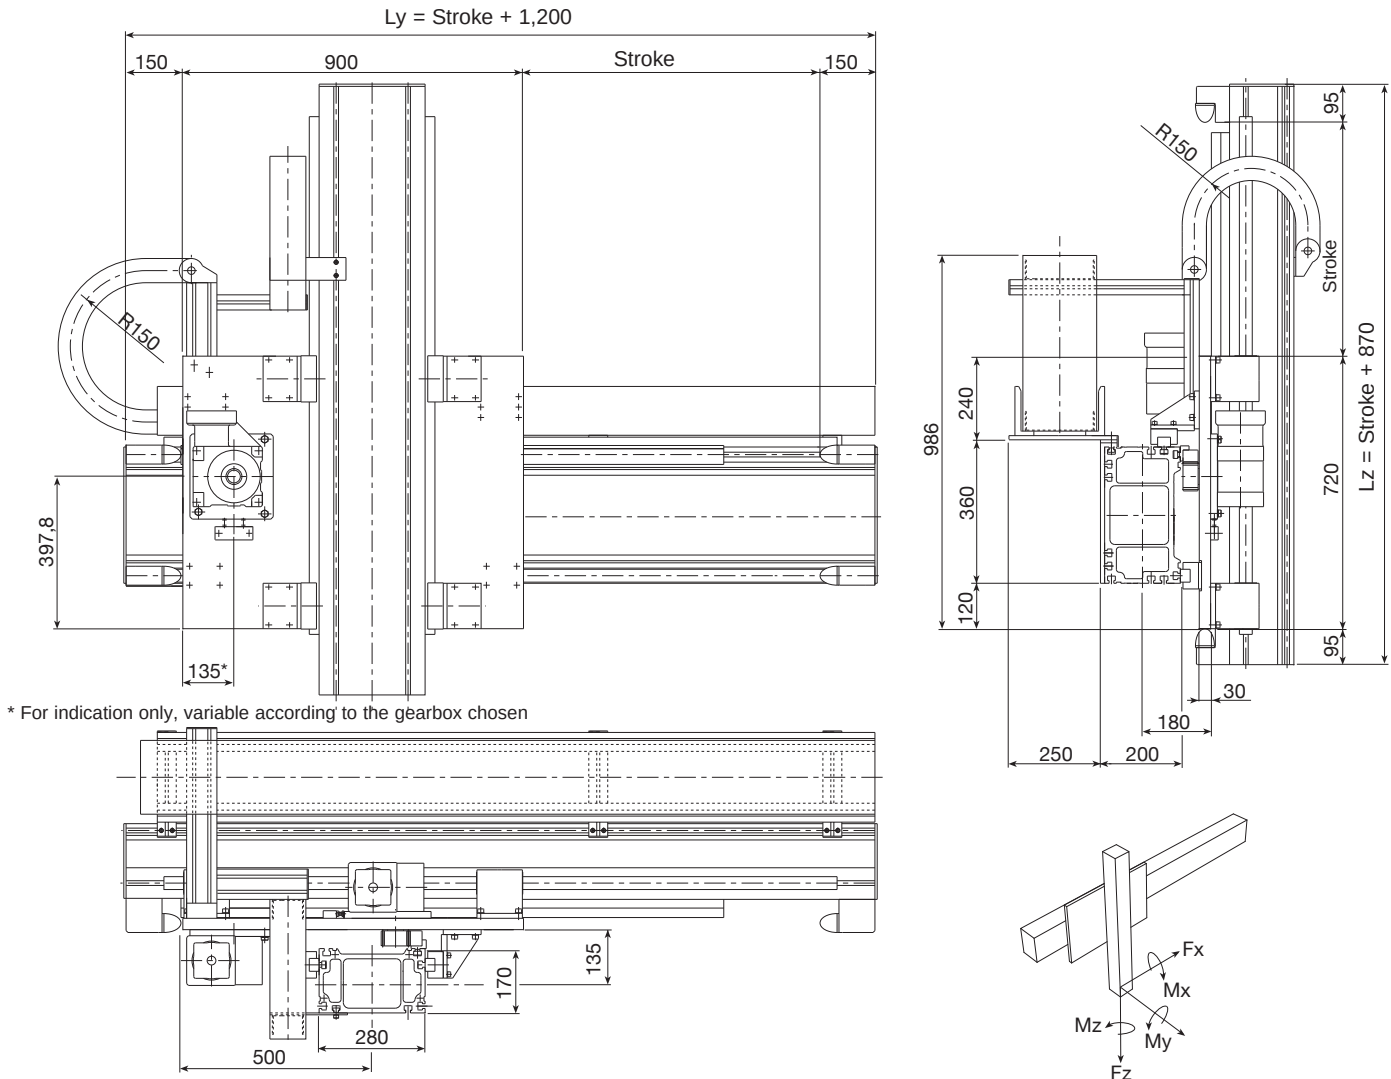

* For indication only, variable according to the gearbox chosen

Performances	Y-axis	Z-axis
Max. load (Pc _{max}) with load on axis (Lz ≤ 1,600 mm)		
Max. speed	2	2 [m/s]
Max. acceleration	2	2 [m/s ²]
Repeatability	-	± 0.15 [mm]
Beam max. length without joint	12,000	12,000 [mm]

Recommended max working conditions					
Model	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _z [N]
PASM 10/8	5,940	6,580	3,625	3,250	11,140

The values shown above include a safety coefficient for automated machinery. They refer to maximum performance with each force acting individually. In case of peak forces acting together please consult our technical dept.
The repeatability shown in the table can be achieved with a ground rack and low-backlash gearboxes.

Constructive data	Y-axis	Z-axis
Load-bearing beam (see page 15/17)	Solyda	Pratyca
Rack (tempered, helical teeth, ground: module KSD)	module 4	module 4 [mm ²]
Translation: 4 caged ball roller slides and guide rails	size 35	size 35
Room available for energy chain	175x45	75x45 [mm ²]
Pinion pitch diameter (induction-hardened, ground - RD)	76.39 - (106.10)	76.39 - (106.10) [mm]

Weights	Y-axis	Z-axis
Base" model (stroke _x and stroke _z =0)	M _{base} = 275 approx. [kg]	
Slide (plates + carriages)	M _{slide} = 102 approx. [kg]	
Beam (incl. guide rails and rack)	q _y = 83 approx.	q _z = 64 approx. [kg/m]


Formules:

Actual load: $P_{eff} = P_{max} - (L_z - 1,600) / 1,000 \cdot q_z < \text{of } Pc$


Module total weight: $M_{tot} = M_{base} + (q_y \cdot \text{stroke}_y + q_z \cdot \text{stroke}_z) / 1,000$ (Stroke_x and stroke_z in mm.)

Steel V-shaped guide rails


Material: high-performance alloy steel: R > 900 MPa
 Hardened and tempered: core hardness 240 HB.
 Induction-hardened and polished. Track hardness > 58 HRC
 Guide rail 28.6x11 code 203.0012 has anti-oxidation coating.
 Anti-oxidation coating is available for all versions upon request.

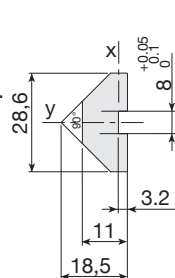

V-shaped
guide rail 28.6x11



V-shaped
guide rail 35x16

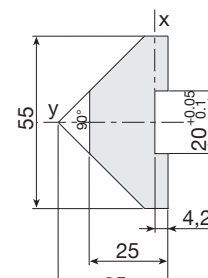


V-shaped
guide rail 55x25

Features	28.6x11	35x16	55x25	
Moment of inertia I _x	2,148	7,932	41,906	mm ⁴
Moment of inertia I _y	14,490	36,405	194,636	mm ⁴
Weight	2	3.5	7.8	Kg/m

Machining: drilled guide rails with straight cut

Machining provided for guide rails with no joint. In addition to the code, please state the type of machining required by adding:

- **.L** V-shaped guide rails, length L, **not drilled**
- **.LF** V-shaped guide rails, length L, **drilled**

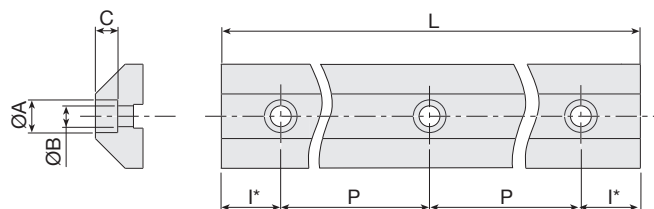


★: If "I" is more than 80 mm, a hole is added to the two ends of the guide rail. Centre-distance 20 for guide rails 203.0027/28; Center-distance 25 for guide rails 203.0122/0423

Size	Treatment	Max. Length	P	I	A	B	C	Code
28,6x11	hardened & tempered	3980	150	40	11	7	5	203.0008
28,6x11	hardened anti-oxidation	3980	150	40	11	7	5	203.0030
35x16	hardened & tempered	5900	150	25	11	7	7.5	203.0028
35x16	Induction-hardened	5900	100	50	11	7	7.5	203.0027
55x25	hardened & tempered	5900	200	50	18	11	11.5	203.0122
55x25	Induction-hardened	5850	150	25	18	11	11.5	203.0423

Machining: drilled guide rails with 1 bevel and 1 slanting cut

Machining provided for the crop down sizes of guide rail ends with joints. In addition to the code, please state the type of machining required by adding:

- **.LX** V-shaped guide rails with 1 slanting cut, length L, **not drilled**
- **.LFX** V-shaped guide rails with 1 slanting cut, length L, **drilled**

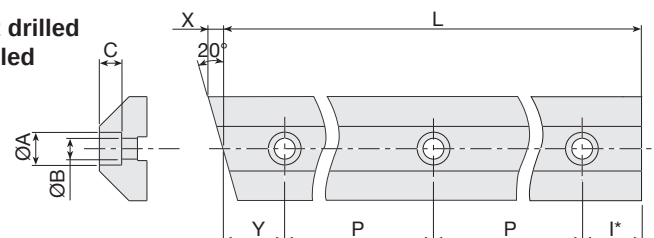


★: the first hole is drilled at a height of "Y", subsequent ones at a centre-distance of "P". If "I" is more than 80 mm, a hole is added to the end of the guide rail. Centre-distance 20 mm for guide rail 203.0027/28; Centre-distance 25 mm for guide rail 203.0122/0423.

Size	Treatment	Max. Length	P	Y	I	A	B	C	Code
28.6x11	hardened & tempered	3,850	150	50	50	11	7	5	203.0008
28.6x11	hardened anti-oxidation	3,850	150	50	50	11	7	5	203.0030
35x16	hardened & tempered	5,900	150	25	25	11	7	7.5	203.0028
35x16	Induction-hardened	5,900	100	50	50	11	7	7.5	203.0027
55x25	hardened & tempered	5,900	200	25	75	18	11	11.5	203.0122
55x25	Induction-hardened	5,900	150	25	25	18	11	11.5	203.0423

Machining: drilled guide rails with 2 slanting cuts

Machining provided for the intermediate crop down sizes of guide rail ends with multiple joints. In addition to the code, please state the type of machining required by adding:


- **.LXX** V-shaped guide rails with 2 slanting cuts, length L, **not drilled**
- **.LFXX** V-shaped guide rails with 2 slanting cuts, length L, **drilled**

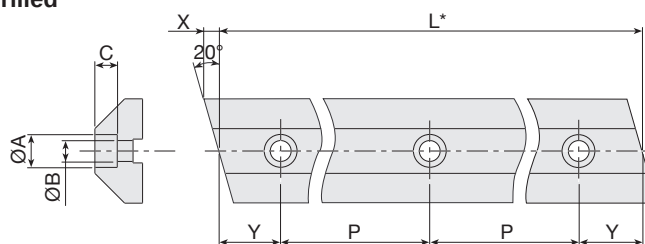

★: in order to maintain a constant hole pitch, arrange the guide rails so that the length "L" is equal to: $n \cdot P + 2 \cdot Y$

Size	Treatment	Max. Length	P	Y	A	B	C	Code
28,6x11	hardened & tempered	3850	150	50	11	7	5	203.0008
28,6x11	indurita antioss.	3850	150	50	11	7	5	203.0030
35x16	hardened & tempered	5900	150	25	11	7	7.5	203.0028
35x16	Induction-hardened	5900	100	50	11	7	7.5	203.0027
55x25	hardened & tempered	5900	200	50	17	11	11.5	203.0122
55x25	Induction-hardened	5900	150	25	17	11	11.5	203.0423

EXAMPLE OF ORDER: n° 2 pieces cod203.0027 / 5150 . LFX + n°1 piece 203.0027 / 5840 . LFX




V-shaped guide rail assembly inserts

Material: C40 galvanized steel.

A and C: suitable for medium profiles (see pages 14 - 15)

B and D: suitable for load-bearing profiles (see pages 15 to 17)

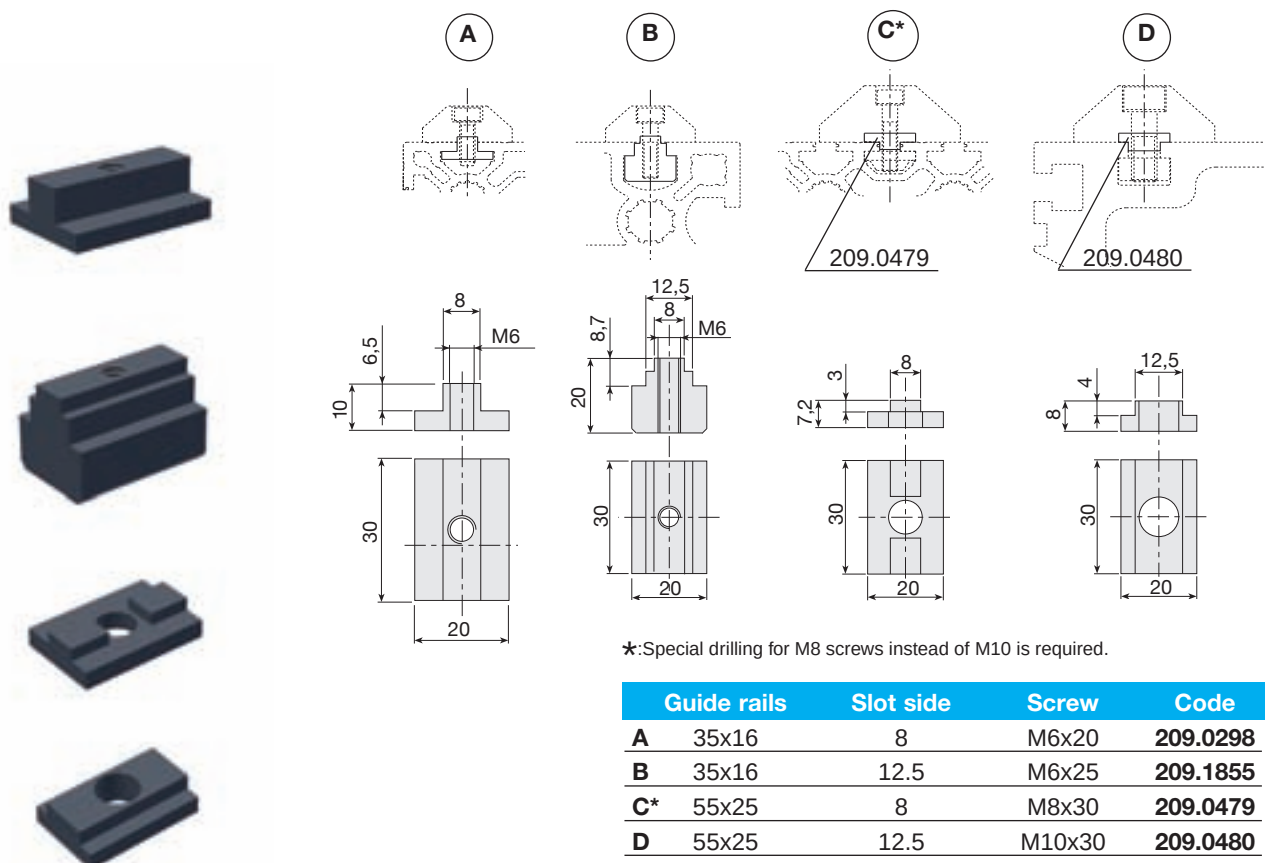

Profiles equipped with assembled V-shaped guide rails (order codes)

For the profile specifications see from page 12 to page 17, for guide rails: page 56, for inserts: page 57.



hard.&temp.



hardened



hard.&temp.



Induct.-hard.



hard.&temp.



Induct.-hard.

	Guide rail	203.0008	203.0030	203.0028	203.0027	203.0122	203.0423
 Profile E01-3		237.0029	237.0030	237.0013	237.2398	-	-
 F01-1		237.0031	237.0032	237.0014	237.0015	-	-
 F02-1		237.0033	237.0034	237.0016	237.0017	-	-
 E01-4		237.0035	237.0036	237.0018	237.0019	-	-
 MA1-3		237.0037	237.0038	237.1387	237.1388	-	-
 MA1-5		237.0039	237.0040	237.1141	237.1142	-	-
 E01-5		237.0041	237.0042	237.0027	237.0028	-	-
 STATYCA		237.0043	237.0044	237.2159	237.2158	237.2301	237.0005
 VALYDA		237.0045	237.0046	237.2126	237.2013	237.0004	237.1542
 LOGYCA		237.0047	237.0048	237.0020	237.2421	237.0021	237.0022
 PRATYCA		237.0049	237.0050	237.0023	237.0024	237.2157	237.1543
 SOLYDA		237.0051	237.0052	237.0025	237.0026	237.0002	237.0006

Order code:

237.XXXX - XX / L



Guide rail and profile length

Special profile machining (see page 83)

Table code

Straight teeth

Rack with straight teeth, pressure angle 20°.

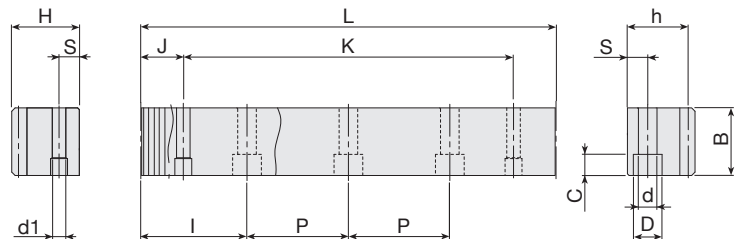
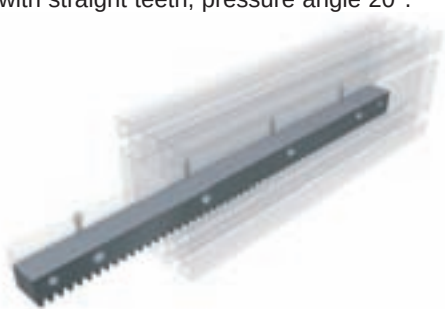


Type	Rs	Hardness tooth	Quality	Precision
BD CK45 Normalized milled	650 N/mm ²	-	Q8	0.085mm/300mm
TD CK45 Normalized induction-hardened teeth	650 N/mm ²	≥ HRC 56	Q8	0.085mm/300mm

Mod.	H	B	L	I	J	d	D	C	d1(H7)	S	h	P	K	Weight [kg]	Code
2	25	25	502.6	62.3	24.6	7	11	7	6	8	23	125.66	452.37	2.3	211.3429
2	25	25	1005.3	62.3	24.6	7	11	7	6	8	23	125.66	955	4.5	211.3363
3	30	30	509	63.1	18.35	9	14	9	8	9	27	127.23	471.2	3.2	211.3367
3	30	30	1017.9	63.1	18.35	9	14	9	8	9	27	127.23	980.1	6.4	211.3351
4	40	40	502.6	62.3	24.6	11	17	9	8	12	36	125.66	452.37	5.7	211.3366
4	40	40	1005.3	62.3	24.6	11	17	9	8	12	36	125.66	955	11.3	211.3349

Helical teeth

Rack with helical teeth, right-hand 19° 31' 42", pressure angle 20°.

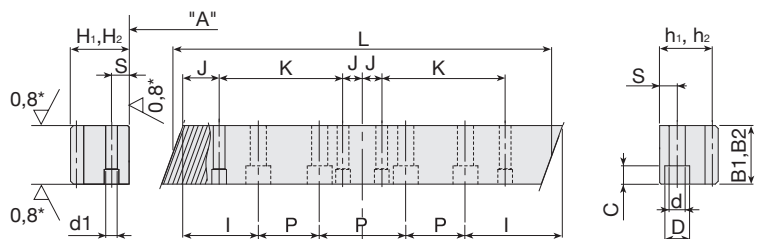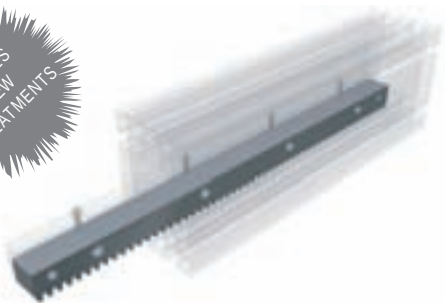

*Surface machining **not available** on KBD, KTD versions

Type	Rs	Hardness tooth	Quality	Precision
KBD CK45 normalized milled	650 N/mm ²	-	Q8	0.085mm/300mm
KTD CK45 normalized induction-hardened teeth	650 N/mm ²	≥ HRC 56	Q9	0.085mm/300mm
KFD CK45 norm. induction-hard. teeth with 3 ground sides	650 N/mm ²	≥ HRC 56	Q9	0.05mm/300mm
KSD CK45 norm. induction-hard., teeth and ground sides	> 650 N/mm ²	≥ HRC 56	Q6	0.025mm/300mm
KRD AISI 9840 alloy steel induct.-hard., teeth and ground sides	> 900 N/mm ²	HRC 60 c.a.	Q6	0.025mm/300mm

Mod.	H ₁	H ₂	B ₁	B ₂	L	I	J	d	D	C	d1(H7)	S	h ₁	h ₂	P	K	kg	Codice
2	25	24	25	24	500	62.5	35	7	11	7	6	8	23	22	125	430	2.2	211.2429
2	25	24	25	24	1,000	62.5	35	7	11	7	6	8	23	22	125	430	4.3	211.2363
3	30	29	30	29	500	62.5	35	10	15	9	8	9	27	26	125	430	3.0	211.2367
3	30	29	30	29	1,000	62.5	35	10	15	9	8	9	27	26	125	430	6.1	211.2351
4	40	39	40	39	500	62.5	35	10	15	9	8	12	36	35	125	430	5.5	211.2366
4	40	39	40	39	1,000	62.5	35	10	15	9	8	12	36	35	125	430	10.9	211.2349

H₁ h₁ for racks KBD, KTD

H₂ h₂ for racks KRD, KFD, KSD

B₁ for racks KBD, KTD,

B₂ for racks KRD, KFD, KSD


EXAMPLE OF ORDER:

code 211.2367 / KSD

_____ Tooth and treatment characteristics

Adjusting plates for racks

Material: 6082 clear anodized aluminium alloy

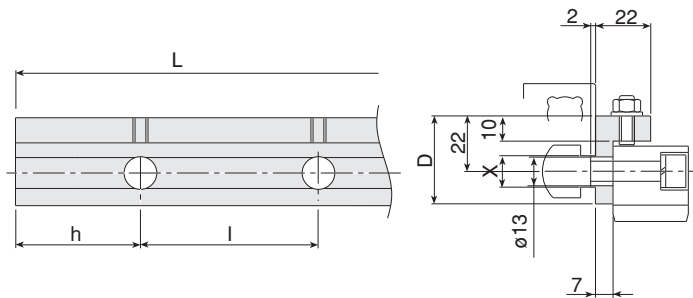

Module	D	L	l	h	N° holes	X	Weight [kg]	Code
2	35	243	126.1	56.35	2	8	0.3	215.0025
2	35	491	126.1	56.35	4	8	0.6	215.0026
2	35	243	126.1	56.35	2	12.5	0.3	215.0027
2	35	491	126.1	56.35	4	12.5	0.6	215.0028
3	35	243	126.1	56.35	2	8	0.3	215.2368
3	35	491	126.1	56.35	4	8	0.6	215.2137
3	35	243	126.1	56.35	2	12.5	0.3	215.2369
3	35	491	126.1	56.35	4	12.5	0.6	215.2281
4	39	243	125.3	57.55	2	12.5	0.3	215.2243
4	39	491	125.3	57.55	4	12.5	0.6	215.2078

Pinion Gears

Straight or helical toothed pinions (19° 31' 42" left-hand). Pressure angle 20°.





Fig. B



Type	Material	Surface treatment	RS	Quality	Tooth hardness
TD Pinion with milled teeth	CK45	induction-hardened	650 N/mm ²	Q8	HRC 56
ND Pinion with helical teeth	Special steel	tempered and hardened	>900 N/mm ²	Q8	HRC 50
RD Pinion with ground helical teeth	16MnCr5	temp. induction-hardened	>900 N/mm ²	Q7	HRC 60

Helical tooth pinion

mod.	Weight	Z	Øp	Øi avail.	b	x	Code
2	0.2	21	44.56	22	28	56	201.0005
2	0.6	30	63.66	22,30,32	28	56	201.0012
3	0.8	20	63.66	22,25,30,32	28	65	201.0007
3	1.4	28	89.13	25,30,32	28	65	201.0013
4	1.5	18	76.39	32	40	75	201.0009
4	2.8	25	106.10	55	40	80	201.0014

Straight tooth pinion

mod.	Weight	Z	Øp	Øi avail.	b	x	Code
2	0.3	22	44	15,20,25	20	55	201.0004
3	0.9	21	63	25,30	30	65	201.0006
4	1.7	19	76	30,35	40	75	201.0008

EXAMPLE OF ORDER:

code 201.0008 / TD / 25

Inner diameter (Øi)

Features and treatment

Programmable Automatic Rack Lubrication System

Tecline

Grease is delivered by means of an electromechanically controlled device with replaceable battery (average life: ca. 1 year) (a). The grease is spread evenly on the racks through the specific pinion (1). You will need one kit per rack.

Kit: - for complete standard systems assembled on-site, the kit includes the products listed in Fig. C (e.g.: Fig. B);

- spare parts are those shown in Fig. A (codes in table 1);

FIG. B

FIG. A



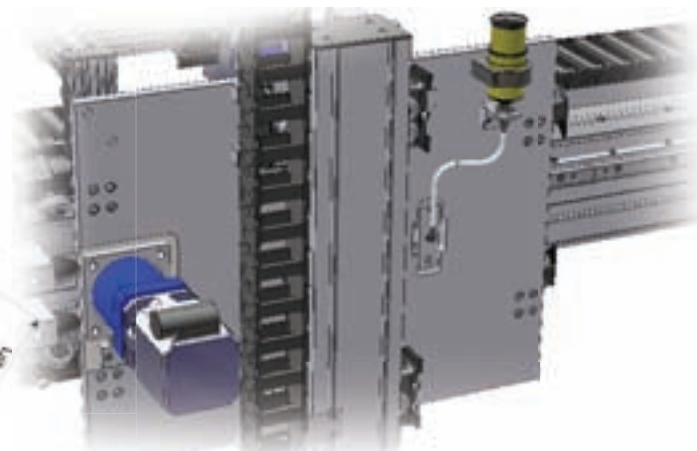


FIG. C

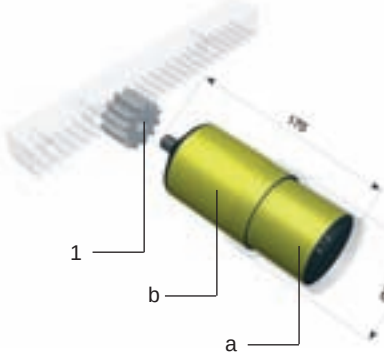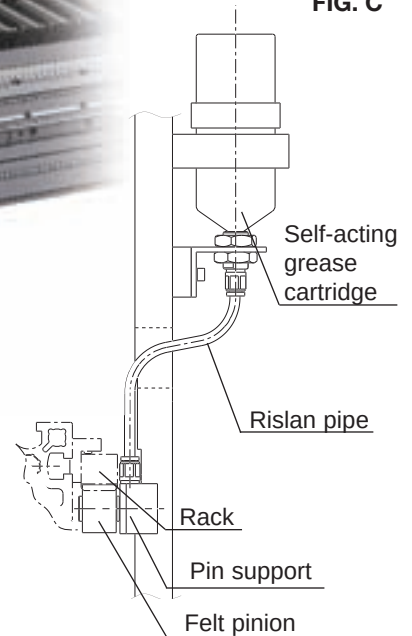

1- Kit including felt pinions and spares

Specification (see figure A)	Code
Cartridge battery set: [a]	111.0034
Programmable grease cartridge (120 cc) [b]	111.0033
m2 - straight tooth pinion [1]	116.0021
m2 - helical tooth pinion [1]	116.0022
m3 - straight tooth pinion [1]	116.0012
m3 - helical tooth pinion [1]	116.0025
m4 - straight tooth pinion [1]	116.0023
m4 - helical tooth pinion [1]	116.0024

2 - Complete self-acting lubrication system

Specification (see figures B and C)	Code
Complete kit	136.0003

Table for selecting maximum operating torque

Table 1 – With lubrication guaranteed under ideal load conditions, dynamics, (1 m/s) with rigid pinion support [Nm].

Pinion / Racks - Straight tooth					Pinion / Racks - Helical tooth					
Module	Z [n°]	Øp [mm]	BD	TD	Z [n°]	Øp [mm]	KBD	KTD	KFD/KSD	KRD
2	22	44	33	90	21	44.56	42	140	150	200
					30	63.66	55	190	205	265
3	21	63	90	215	20	63.66	100	370	400	500
					28	89.13	240	475	500	650
4	19	76	225	540	18	76.39	250	810	880	1000
	25	100	410	1050	25	106.1	460	1100	1150	1500

Example of simplified calculation

To obtain the working torque value, divide the maximum operating torque (Tab. 1) by the safety factor (Tab. 2). Intermediate values can be adjusted according to the application.

Motion (A) = High shock 1.75

Speed (B) = Low 1

Lubrication (C) = Constant 0.9

Rack = module 3 KTD

Pinion = Øp 63.66 (370 Nm)

Safety factor = A x B x C = 1.575

Motion (A)	Speed (B)	Lubrication (C)	Safety fac. (AxBxC)
Low shock 1.25	Low 1	Constant 0.9	1.13
Medium shock 1.5	Medium 1.25	Daily 1.2	2.25
High shock 1.75	High 1.5	Monthly 2.5	6.56


Tab.2

Maximum transmissible torque = Maximum torque 370 / Safety factor 1,575 ≤ 235 Nm


For heavy-duty applications, please ask our technical dept. to carry out the appropriate checks.

Connection shafts


The Tecline range includes a series of hollow shafts for connecting the pinions on the systems. We can supply standard connections, according to your application requirements. The complete kit includes all the components needed to make the connection, with shrink-discs and crop down sizes of pins for insertion into the pinions.

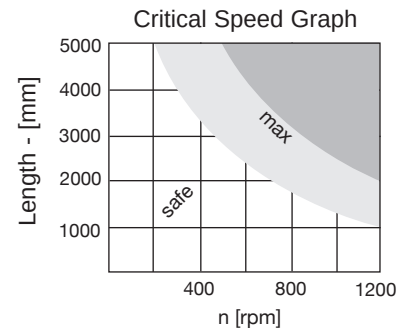


Type 1 - Elastic joint with connecting shaft, suitable for low speeds with center-distance and length of up to 2 m.

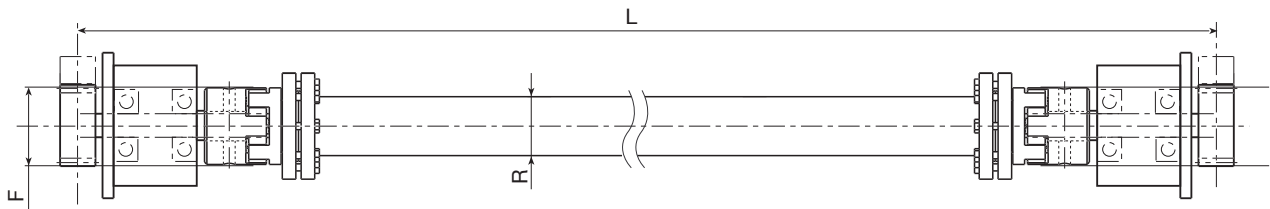

Type 2 - Stainless steel blade joint connecting shafts, for backlash-free transmissions

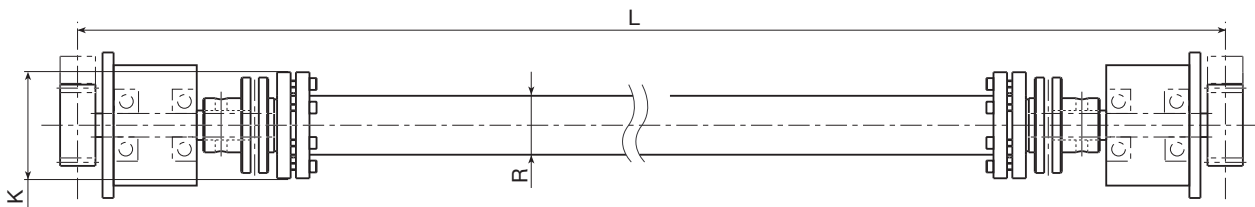

Type 3 - Stainless steel blade joint connecting shafts and support bearings, suitable for backlash-free transmissions

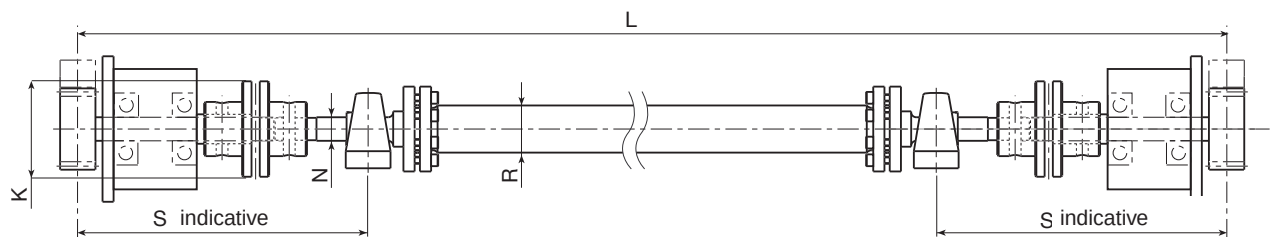


R(*)	K	F	N	S	L _{max}	MTwork [Nm]	Mom. of inertia [kgm ²]	Type 1: Code/L	Type 2: Code/L	Type 3: Code/L
40	67	55	20	200	6,200	20	$0.0028 + 0.46 \times L \times 10^{-6}$	436.0948	436.0957	436.0965
50	81	65	25	235	6,300	35	$0.0092 + 0.66 \times L \times 10^{-6}$	436.0949	436.0958	436.0966
50	93	80	25	235	6,300	70	$0.0161 + 1.34 \times L \times 10^{-6}$	436.0951	436.0971	436.0974
70	104	95	25	235	6,400	100	$0.0293 + 2.93 \times L \times 10^{-6}$	436.0952	436.0960	436.0968
80	126	120	25	250	6,400	190	$0.0793 + 4.5 \times L \times 10^{-6}$	436.0955	436.0963	436.0984
90	143	-	-	-	6,500	300	$0.1456 + 6.53 \times L \times 10^{-6}$	-	436.0986	436.0987
110	185	-	-	-	6,000	420	$0.3499 + 12.3 \times L \times 10^{-6}$	436.0144	436.0145	436.0146

(*) R: Shaft material and diameter are selected in accordance with required speed, centre-distance L, torque and accuracy.


Roller slides

Ø40 roller slides with 2 or 3 rollers, aluminium alloy castings (Rs=280 N/mm²). Ø30, Ø40, Ø52 and Ø62 roller slides with 4 or 6 rollers, extruded aluminium alloy (Rs=310 N/mm²). Alloy steel pins (Rs=800 N/mm²) Rollers with double rows of angular contact ball bearings, long-life.

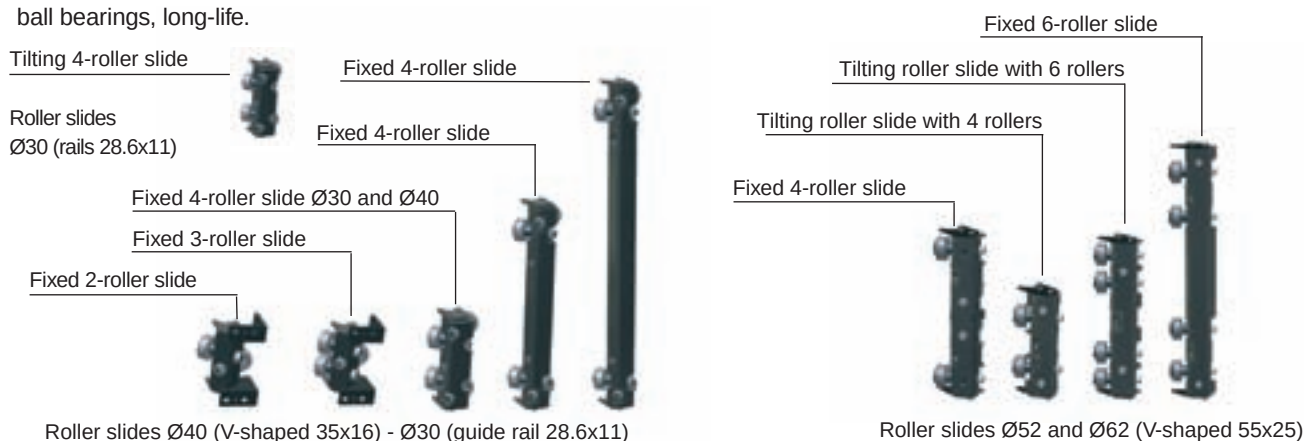

Tilting roller slides with 4 rollers Ø30 for V-shaped guide rails 28.6x11

Use the roller slide eccentric pin to adjust the backlash along the plane between the guide rails.

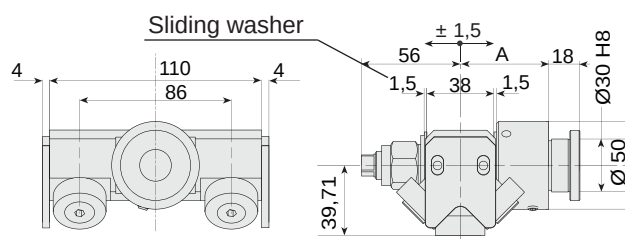




Important: remove the space washers to enable self-alignment of the roller slide

	A	Weight [kg]	Code
Roller slide with concentric pin	75	1.8	204.0052
Roller slide with excentric pin (±1 mm)	75	1.8	204.0053
Roller slide with concentric pin	50	1.4	204.0054
Roller slide with excentric pin (±1 mm)	50	1.4	204.0055

Spare parts	A	Code
Complete body with rollers		204.0050
Concentric pin	75	236.0010
Excentric pin (±1 mm)	75	236.0011
Concentric pin	50	236.0014
Excentric pin (±1 mm)	50	236.0015




2 Roller slides Ø40 for V-shaped guide rails 35x16

Please follow the diagrams below to ensure correct assembly. To make up for the tolerances in the profile shapes, use pins to lock carriages with eccentric rollers after placing them in the appropriate position. (With the eccentric pins in the neutral position).

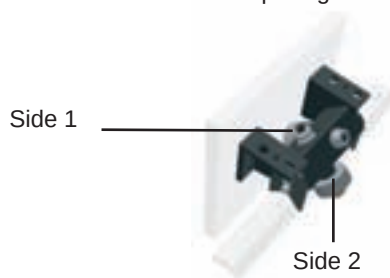


Roller side 1	Roller side 2	Specification	Weight [kg]	Code
Concentric	Concentric	2-rollers carriage Ø40 - concentric	1	204.2072
Excentric	Concentric	2-rollers carriage Ø40 - 1 exc. side 1	1	204.2071
Concentric	Excentric	2-rollers carriage Ø40 - 1 exc. side 2	1	204.0004
Excentric	Excentric	2-rollers carriage Ø40 - excentric	1	204.0019

Application diagram common to 2-roller slides

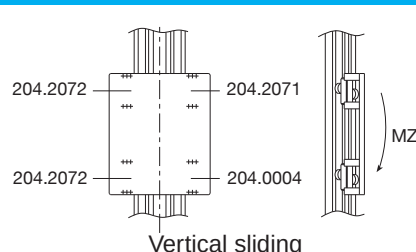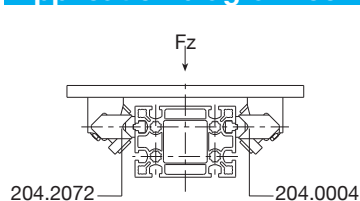


3-Roller slides Ø 40 for V-shaped guide rails 35x16

Please follow the diagrams below to ensure correct assembly. To make up for tolerances in the profile shapes, use pins to lock carriages with eccentric rollers after placing them in the appropriate position. (With the eccentric pins in the neutral position).

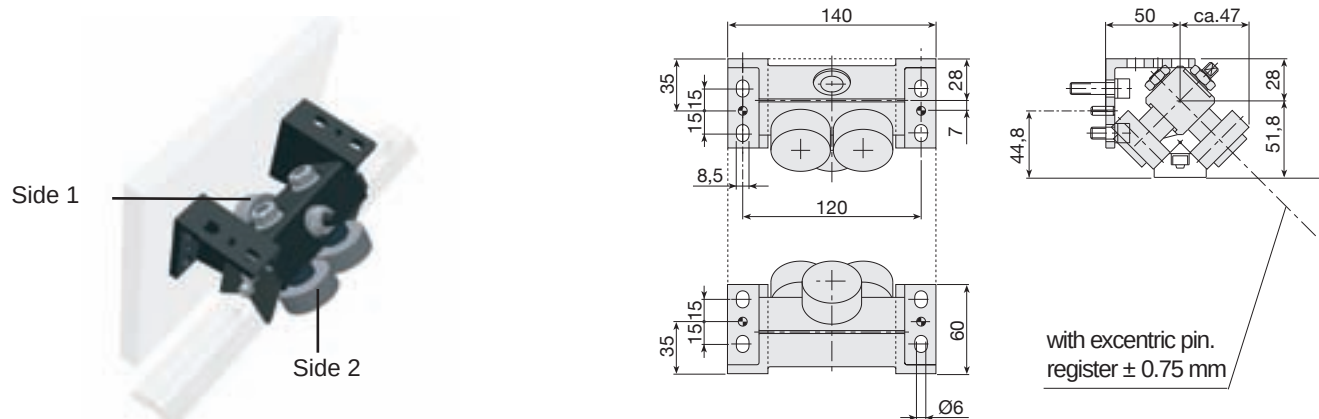


Rollers side 1	Rollers side 2	Specification	Weight [kg]	Code
1 concentric	2 concentric	3-rollers carriage Ø40 - concentric	1.3	204.1579
1 eccentric	2 concentric	3-rollers carriage Ø40 - 1 exc. side 1	1.3	204.0474
2 concentric	1 concentric	3-rollers carriage Ø40 - concentric	1.3	204.2302
2 concentric	1 eccentric	3-rollers carriage Ø40 - 1 exc. side 2	1.3	204.0475

Application diagram common to 3-roller slides

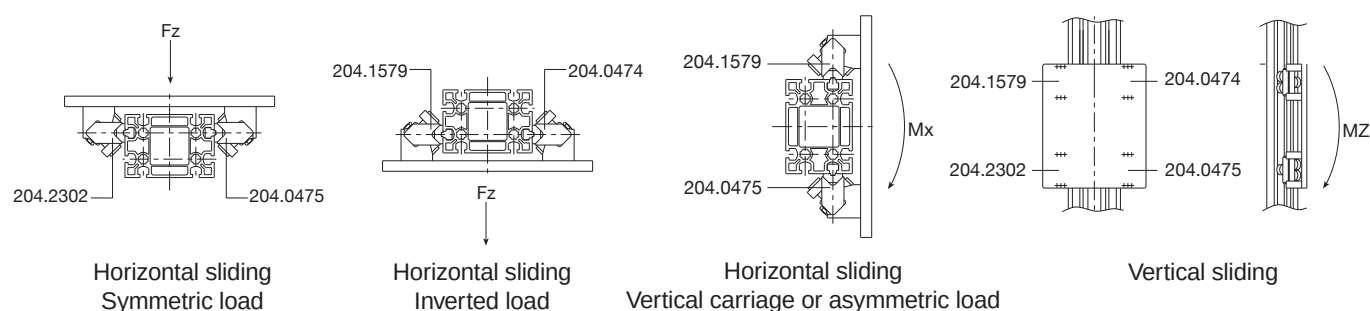

Tilting roller slides with 4 rollers Ø40 for V-shaped guide rails 35x16

Use the roller slide eccentric pin to adjust the backlash along the plane between the guide rails.

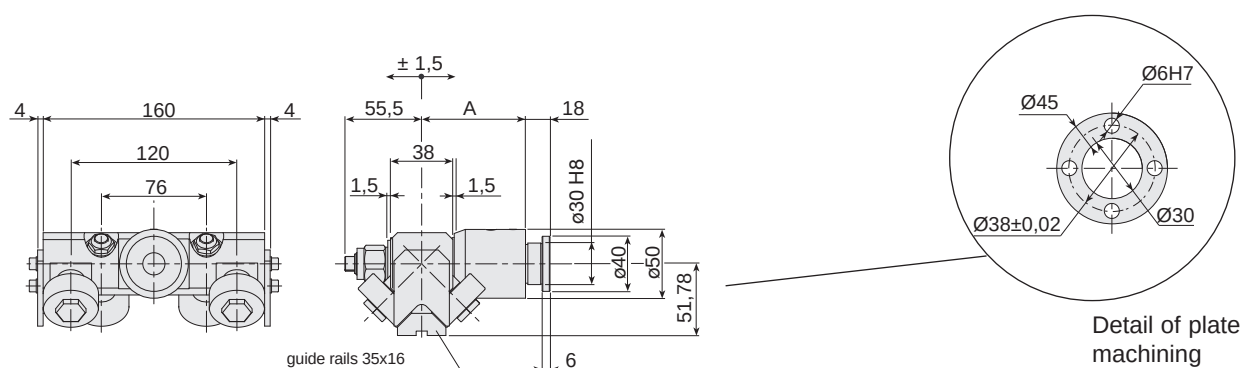

Important: remove the spacer washers to enable self-alignment of the roller slide

	A	Weight [kg]	Code	Spare parts	A	Code
Slide with eccentric stud (±1 mm)	75	2.2	204.0016	Complete body with rollers		204.0013
Slide with eccentric stud (±1 mm)	50	1.8	204.0033	Eccentric stud (±1 mm)	75	236.0011
				Eccentric stud (±1 mm)	50	236.0015

All pins are eccentric, but are made concentric by inserting the pin in the specific hole on the plate, in order to determine the required preload.

Fixed 4-roller slide Ø40 for V-shaped guide rails V 35x16

Use the roller slide eccentric stud to adjust the backlash along the plane between the guide rails.

Important: machine the pin clamping plate as shown in Fig. A

Important: remove the space washers to enable self-alignment of the roller slide Sliding washers

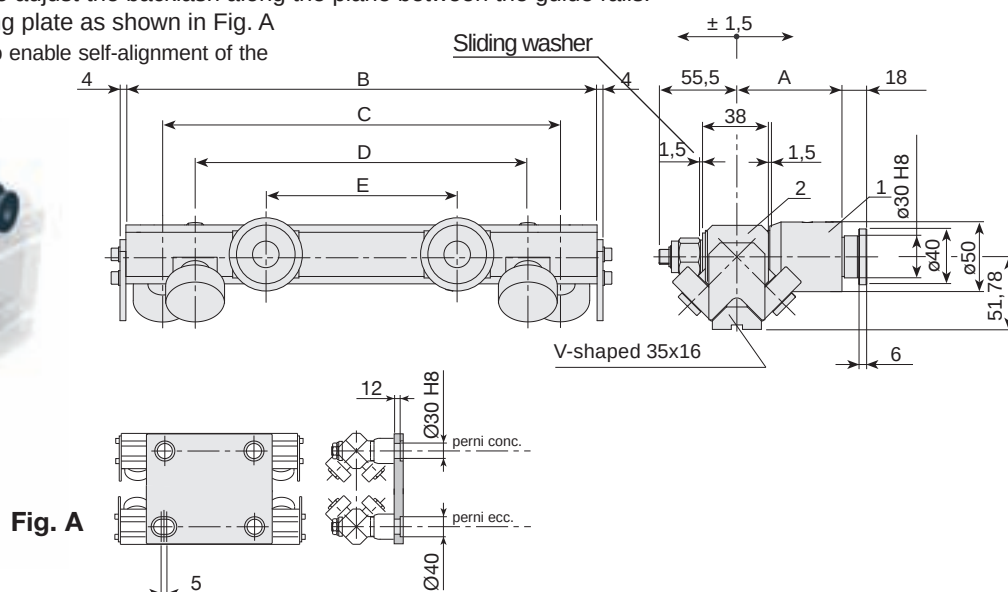


Fig. A

	A	Code
Roller slide L=370 complete with concentric pin	75	204.0017
R. slide L=370 complete with exc. pin (± 1 mm)	75	204.0018
Roller slide L=600 complete with concentric pin	75	204.0027
R. slide L=600 complete with exc. pin (± 1 mm)	75	204.0028
Roller slide L=370 complete with concentric pin	50	204.0030
R. slide L=370 complete with exc. pin (± 1 mm)	50	204.0031
Roller slide L=600 complete with concentric pin	50	204.0034
R. slide L=600 complete with exc. pin (± 1 mm)	50	204.0035

R. slide spare parts (2)	B	C	D	E	Code
Roller slide L=370	370	320	276	180	204.0005
Roller slide L=600	600	550	506	410	204.0026

Pin spare parts (1)	A	Weight [kg]	Code
Concentric pin	75	4.1	236.0010
Eccentric stud (± 1 mm)	75	4.1	236.0011
Concentric pin	50	3.5	236.0014
Eccentric stud (± 1 mm)	50	3.5	236.0015

E type roller slides (roller Ø52) and F type (roller Ø62) for V-shaped guide rails 55x25

4-Stiff Rollers slide. Suitable for mounting stud: **Type 7-8**

Use the roller slide eccentric stud to adjust the backlash along the plane between the guide rails.

Important: machine the pin clamping plate as shown in Fig. A


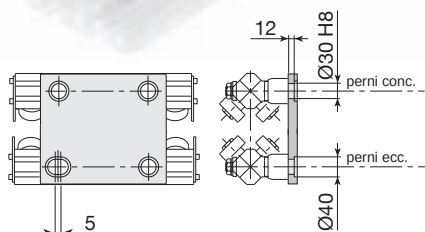


Fig. A

K version

inverted roller position see page 63

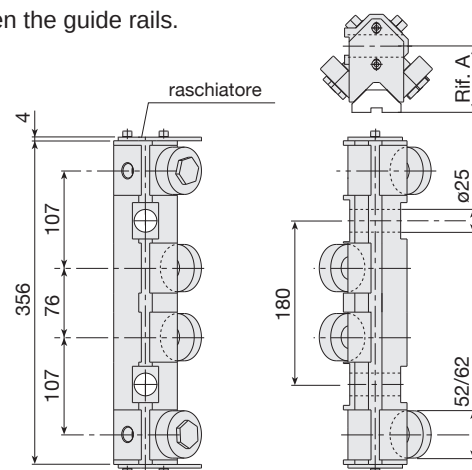


Ø Rollers	Rif. A
Rollers Ø52	71.75
Rollers Ø62	78.85

Technical characteristics	Ø52	Ø62
N° rollers	4	4
Weight [kg.]	4.6	5.2
Spare parts code	204.1518	204.1519

Type G roller slides (roller Ø52) and H type (roller Ø62) for V-shaped guide rails 55x25

Tilting 4-roller slides Suitable for assembly pins: **Type 9**

Use the roller slide eccentric pin to adjust the backlash along the plane between the guide rails.

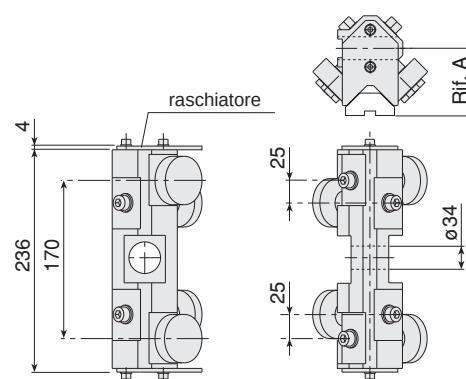



Ø Rollers	Rif. A
Roller Ø52	71.75
Roller Ø62	78.85

Technical characteristics	Ø52	Ø62
N° roller	4	4
Weight [kg.]	3,2	3,8
Spare parts code	204.1520	204.1521

I-type roller slides (roller Ø52) and L-type (roller Ø62) for V-shaped guide rails V 55x25


Tilting 4-roller slides Suitable for assembly pins: **Type 9**

Use the roller slide eccentric pin to adjust the backlash along the plane between the guide rails.

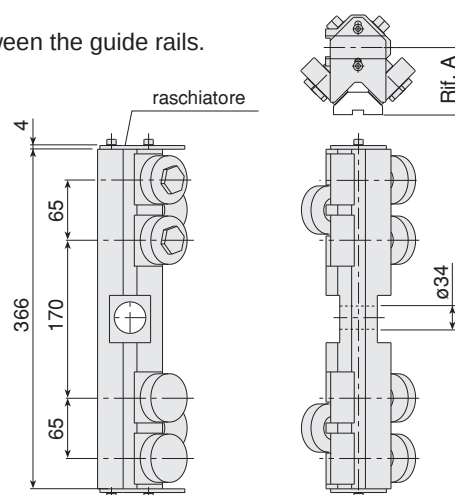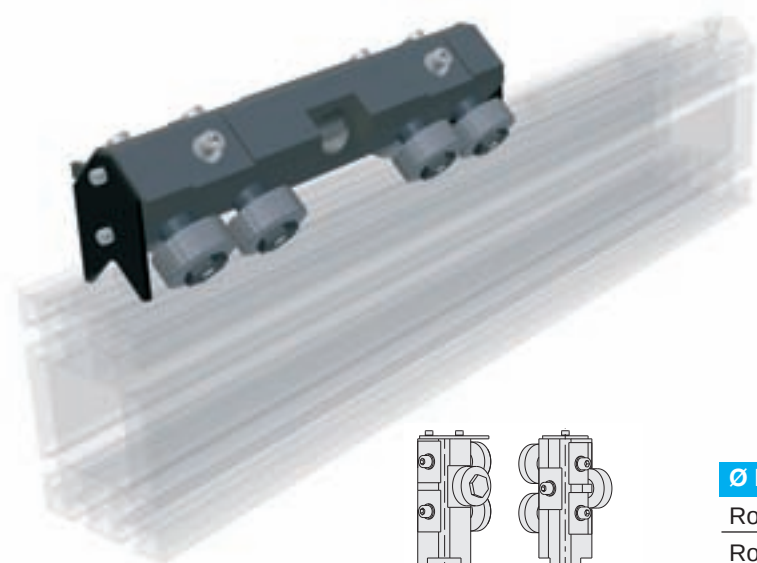

Ø Roller	Rif. A
Roller Ø52	71.75
Roller Ø62	78.85

Technical characteristics	Ø52	Ø62
N° rollers	6	6
Weight [kg.]	4,9	5,9
Spare parts code	204.1522	204.1523




K version

inverted roller position see page 63

P-type roller slides (rollers Ø52) and Q-type (rollers Ø62) for V-shaped guide rails 55x25


Fixed 4-roller slides Suitable for assembly pins: **Type 10-11-12**

Use the roller slide eccentric pin to adjust the backlash along the plane between the guide rails.

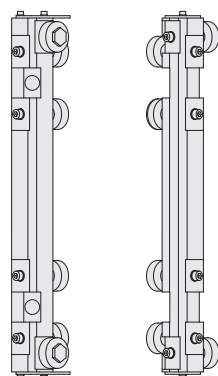

K Version

inverted roller position see page 63

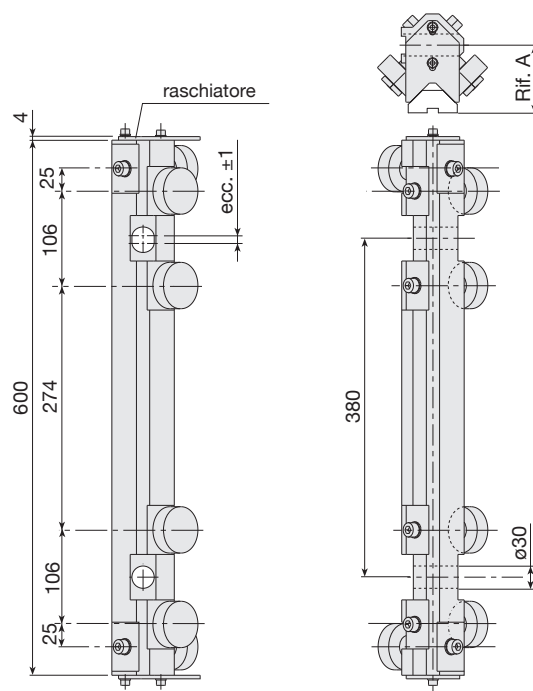

Technical characteristics	Ø52	Ø62
N° rollers	6	6
Weight [kg.]	4.9	5.9
Spare parts code	204.2086	204.2283

Spare roller with stud

Make sure that all the components are locked in place with the appropriate screws. The recommended tightening torque for pin locking screws and nuts is 50 Nm.



Max. load factors for hardened and tempered guides


Roller	Cw [N]	C0w[N]	Fr amm.[N]	Max. S.
Ø30	5,000	3,000	1,350	7 m/s
Ø40	9,800	6,200	2,600	7 m/s
Ø52	15,800	10,500	4,400	6 m/s
Ø62	21,100	14,500	5,600	5 m/s

Max. load factors for induction-hardened guides

Roller	Cw [N]	C0w[N]	Fr amm.[N]	Max. S.
Ø30	5,000	3,000	400	2 m/s
Ø40	9,800	6,200	800	13 m/s
Ø52	15,800	10,500	1,400	2.5 m/s
Ø62	21,100	14,500	1,900	2 m/s



Spare roller with pin	Weight [kg]	Code
Ø30 Concentric	0.02	406.0056
Ø40 Concentric	0.22	205.0464
Ø40 Excentric (± 0.75 mm)	0.25	205.0463
Ø52 Concentric	0.4	205.0163
Ø62 Concentric	0.55	205.0165

Material: burnished steel (Rs=800 N/mm2). Special variants upon request. AISI 303 stainless steel versions are available upon request. Types 0-7-8-9 are complete with self-lubricating bushings to make roller slide self-adjustments easier.

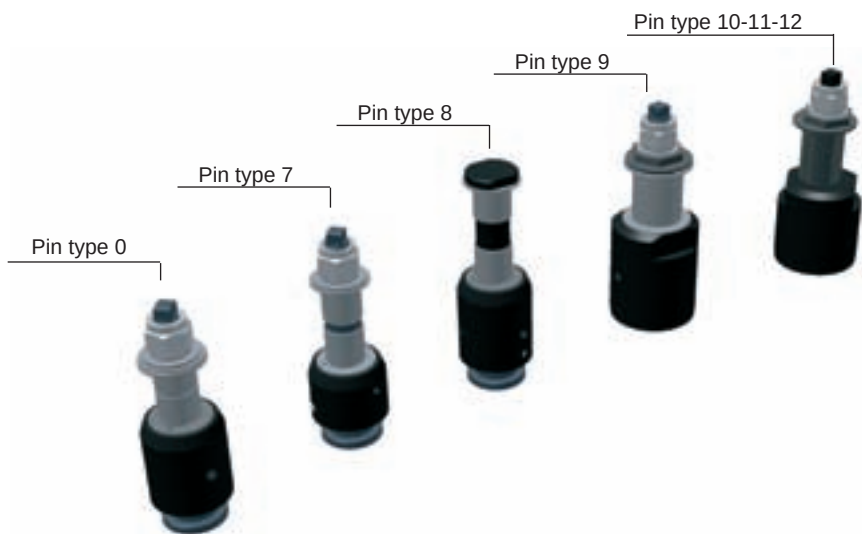

Type 0 assembly pins suitable for roller slide Ø30 and Ø40

Important: machine the pin clamping plate as shown in Fig. A

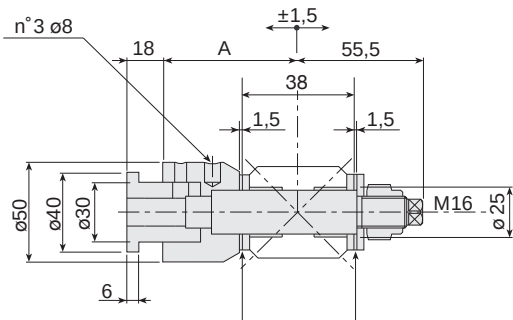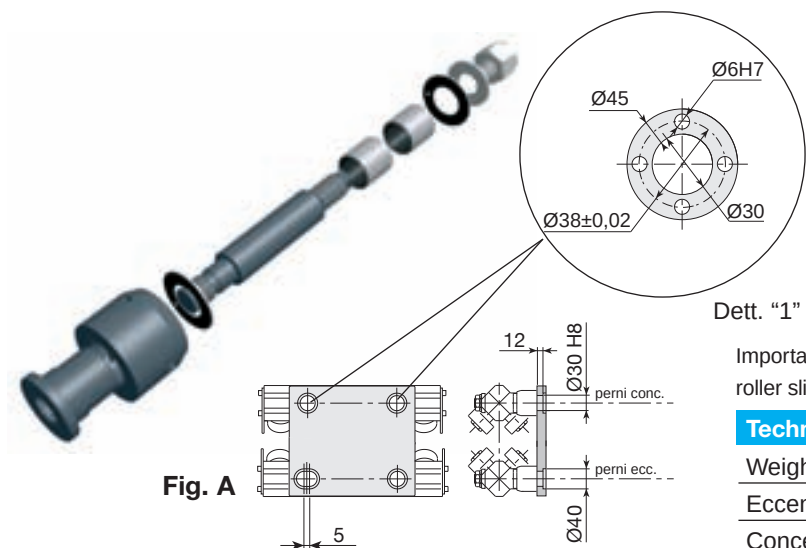



Dett. "1"

Important: remove the spacer washers to enable self-alignment of the roller slide

Technical caracteristics	A	
Weight [kg.]	1.1 approx.	
Eccentric code ($\pm 0,75$ mm)	75	236.0011
Concentric code ($\pm 0,75$ mm)	50	236.0015

Type 7 assembly pins suitable for roller slide E-F

Important: machine the pin clamping plate as shown in Fig. A

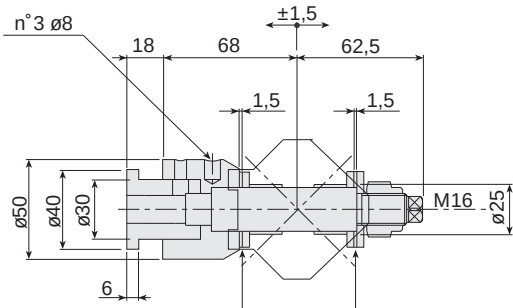
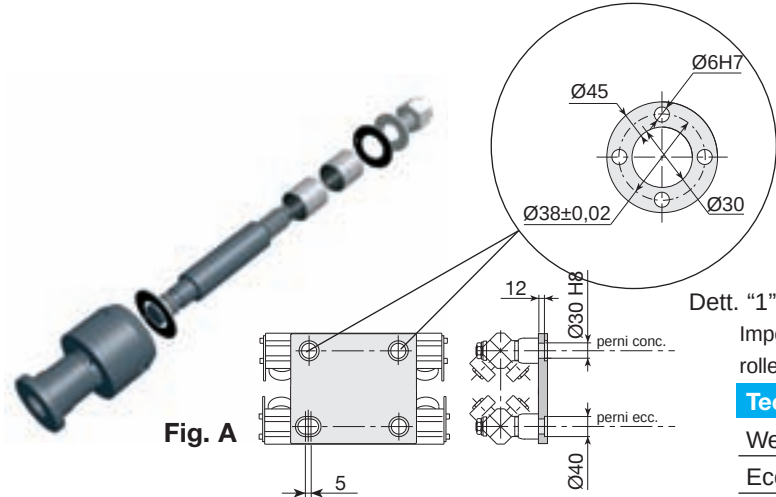


Dett. "1"

Important: remove the spacer washers to enable self-alignment of the roller slide

Technical caracteristics		
Weight [kg.]	1.1 approx.	
Eccentric code (± 1 mm)	236.1689	

Assembly pins type 8 suitable for carriage E-F

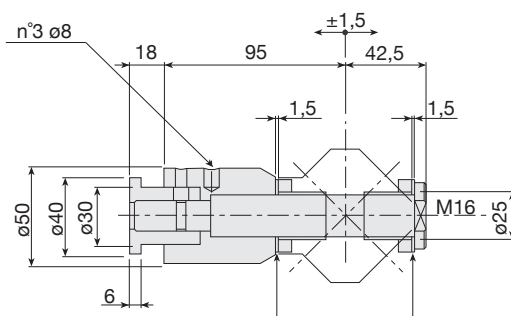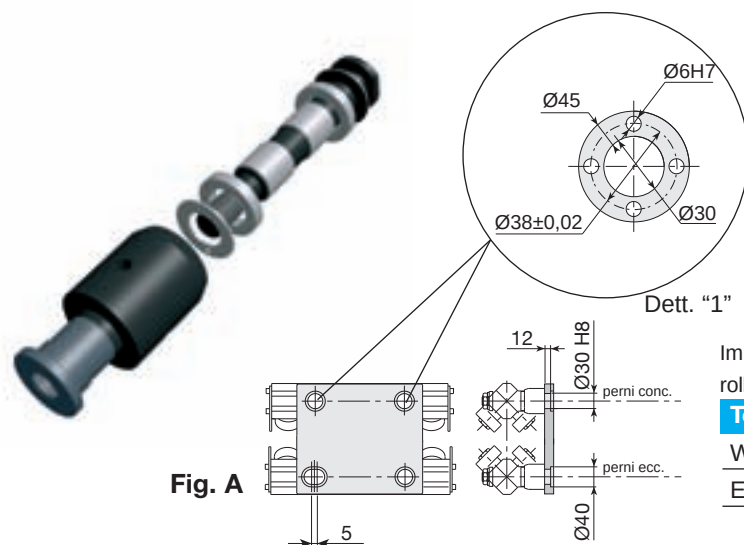


Important: remove the spacer washers to enable self-alignment of the roller slide

Technical characteristics

Weight [kg.]	1.8 approx.
Excentric code (± 1 mm)	236.1691

Type 9 assembly pins suitable for tilting roller slides G-H / I-L

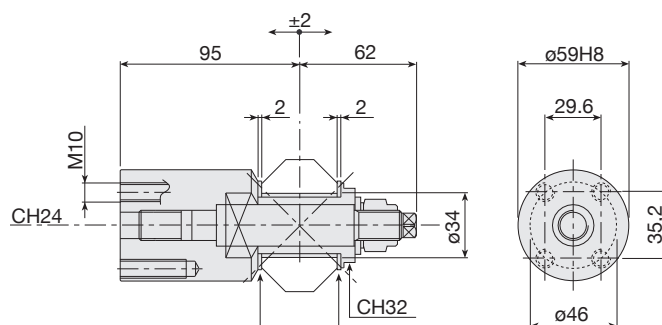


Important: remove the spacer washers to enable self-alignment of the roller slide

Technical characteristics

Weight [kg.]	2 approx.
Concentric code	236.2076
Excentric code ($\pm 1,5$ mm)	236.2079




Type 10-11-12 assembly pins suitable for tilting roller slides A-D / P-Q

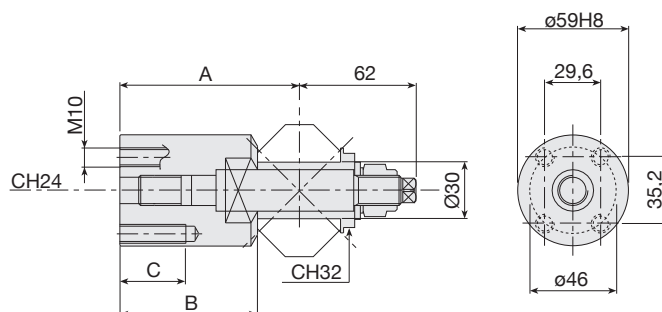

Type	A	B	C	Weight [kg]	Conc.code	Exc. code ($\pm 1,5$ mm)
10	95	73	35	2	236.2082	236.2083
11	87	65	27	1.8	236.2088	236.2089
12	78	56	18	1.7	236.2090	236.2091

Order code table for roller slides and pins

Tecline





	Roller sl.	E	F	G	H	I	L	P	Q
Pin	Ø roller	52	62	52	62	52	62	52	62
7	con.	204.1314	204.1318	-	-	-	-	-	-
	exc.	204.1344	204.1348	-	-	-	-	-	-
8	con.	204.1315	204.1319	-	-	-	-	-	-
	exc.	204.1345	204.1349	-	-	-	-	-	-
9	con.	-	-	204.2092	204.2093	204.2094	204.2095	-	-
	exc.	-	-	204.2102	204.2103	204.2104	204.2105	-	-
10	con.	-	-	-	-	-	-	204.2096	204.2097
	exc.	-	-	-	-	-	-	204.2106	204.2107
11	con.	-	-	-	-	-	-	204.2098	204.2099
	exc.	-	-	-	-	-	-	204.2108	204.2109
12	con.	-	-	-	-	-	-	204.2100	204.2101
	exc.	-	-	-	-	-	-	204.2110	204.2111

Assembly of standard carriages / K version carriages

IMPORTANT: for applications with high projecting loads, the rollers of the slides must be adjusted so that the load is supported by the maximum possible number of rollers. If this means arranging the rollers symmetrically with respect to the standard roller slide version, please add the letter K at the end of the code when filling in the order form. However, the roller assembly can also be inverted at a later date, by disassembling the pins and rollers and then **reassembling them in the opposite way**.

Example:

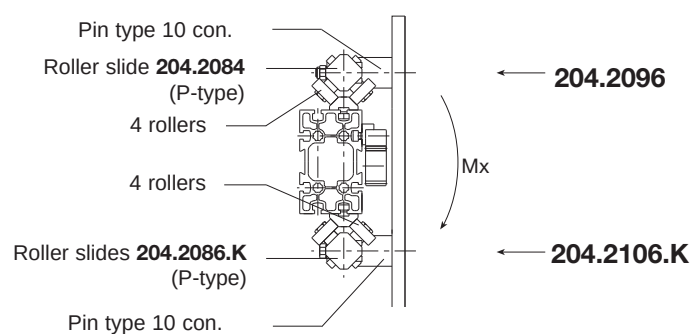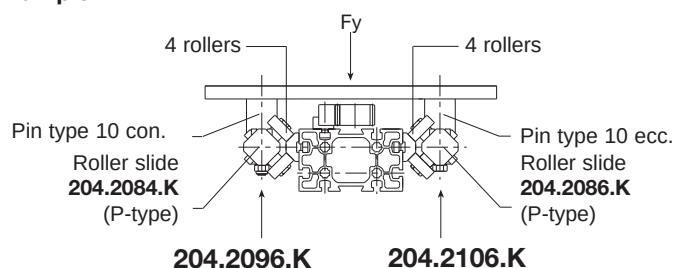

Anti-drop safety device with pneumatic brake system

Anti-drop safety devices, available in a range of sizes, are supplied according to the type of application. For instance, they can act as a mechanical stop to block the free-falling load at any stroke point, or as a lock in static conditions at any position.


Two-way blocking occurs following an unexpected pressure drop.

A mechanical safety release system is available on request (patented). Catalogue available upon request.

The kit includes: braking device and rod with relative supports, micro-switch. Solenoid valve available upon request.

Operating pressure 3-6 Bar.

With no pressure = locked.

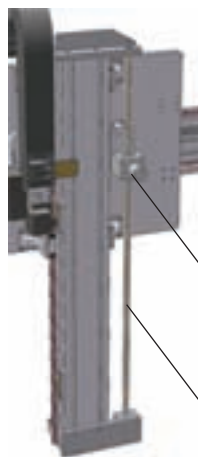


Type A
Static

Pneumatic
brake
system

tempered and
chrome-plated
cylindrical rod

Type B
Dynamic for
free-falling
load

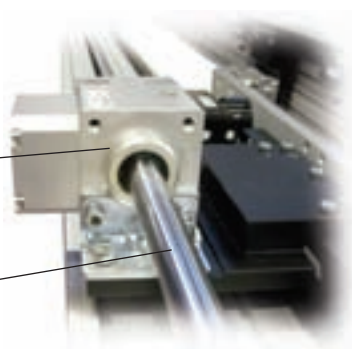

1- Static rod blocking device

Type	Codice	Rod Blocking force [N]	Stroke [mm]
A	236.0018	/ 1,200	/ ...
A	236.0018	/ 1,900	/ ...
A	236.0018	/ 3,000	/ ...
A	236.0018	/ 5,400	/ ...
A	236.0018	/ 7,500	/ ...
A	236.0018	/ 12,000	/ ...

Emergency brake for free-falling load


1- Dynamic rod blocking device

Type	Code	Rod Blocking force [N]	Stroke [mm]
B	236.0019	/ 3,000	/ ...
B	236.0019	/ 5,400	/ ...
B	236.0019	/ 7,500	/ ...
B	236.0019	/ 12,000	/ ...

Safety lock-pin (stopper cylinder)

Lock-pins are available in two sizes to block the vertical axes in the safety position to allow horizontal movements during maintenance. The safety lock-pins comprise the use of the through rod. Select the size according to the load. The kit includes: drilled plate for rod, stopper cylinder, micro-switch and 2 magnetic gearboxes.

Max. operating pressure: 10 bar.

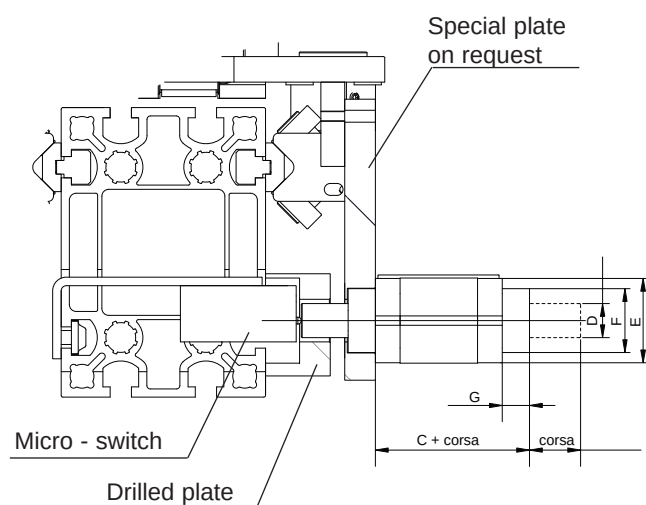

1- Safety lock-pin



ØD Rod	Stroke	C	E	F	G	Kit Code
20	20	60.5	50	38	16	236.0021
32	30	-	-	-	-	236.0022

2- Accessory: drilled plate for rod

ØD Rod	Base	Width	Thickness
20	60	100	39
32	60	100	39

PVS® with round head and orthogonal milling

PVS® connecting elements with round anchor head and orthogonal milling that can be inserted frontally into the slots to join two orthogonal profiles.

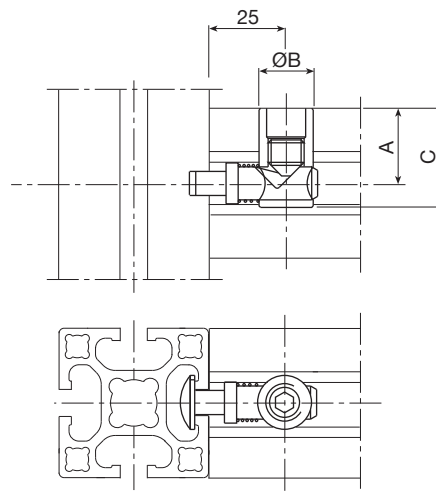
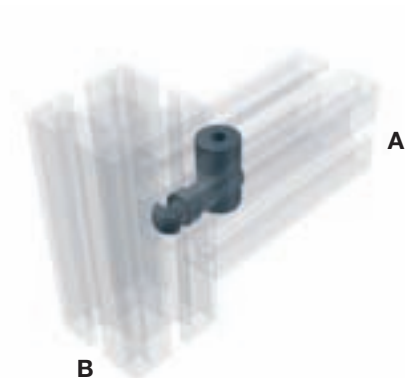


Profile B	Profile A	30	45	50	60
	60	-	-	-	F20-20
	50	-	-	A20-20	A20-20
	45	-	E20-20	E20-20	E20-20
	30	B20-20	B210-20	B210-20	B210-20

Profile base	30	45	50	60
A wheelbase	15	22,5	25	30
B Ø milling	15.1	18.1	18.1	18.1
C profile milling	22	30.5	33	38

PVS® with round head and parallel milling

PVS® connecting elements with round anchor head and parallel milling that can be inserted frontally into the slots to join two orthogonal profiles.

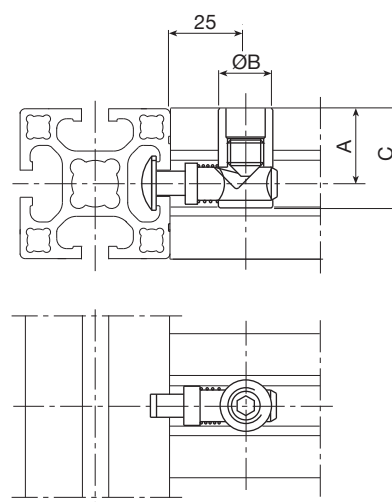
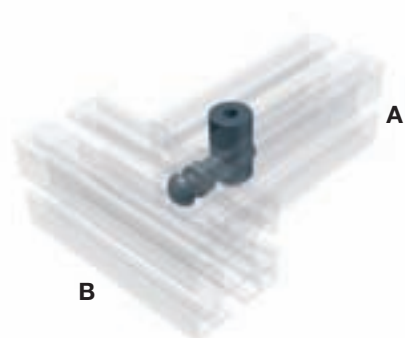


Profile B	Profile A	30	45	50	60
	60	-	-	-	F20-10
	50	-	-	A20-10	A20-10
	45	-	E20-10	E20-10	E20-10
	30	B20-10	B210-10	B210-10	B210-10

Profile base	30	45	50	60
A wheelbase	15	22.5	25	30
B Ø milling	15.1	18.1	18.1	18.1
C profile milling	22	30.5	33	38

PVS® with general-purpose round head

PVS® connecting elements with round anchor head, to be inserted into the slot at the beginning of the profile, to join two orthogonal profiles in any position.

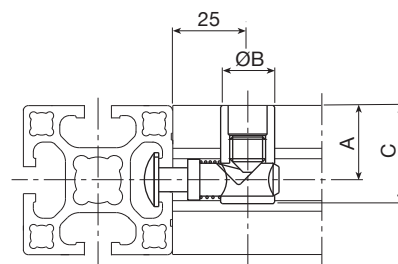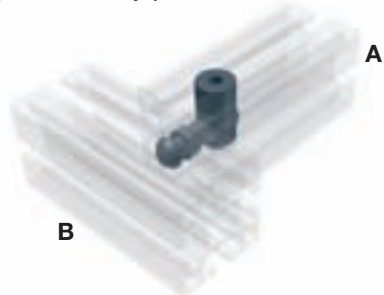


Profile B	Profile A	30	45	50	60
	60	-	-	-	F20-90
	50	-	-	A20-90	A20-90
	45	-	E20-90	E20-90	E20-90
	30	B20-90	B20-90	B20-90	B20-90

Profile base	30	45	50	60
A wheelbase	15	22.5	25	30
B Ø milling	15.1	18.1	18.1	18.1
C profile milling	22	30.5	33	38

PVS® with threaded head

PVS® connecting elements with threaded anchor head, for fixing to plates or other assemblies.





Profile	M6		M8	
	60	-	F20-60	
	50	-	A20-60	
	45	-	E20-60	
	30	B20-66	B20-60	

Profile base	30	45	50	60
A wheelbase	15	22,5	25	30
B Ø milling	15.1	18.1	18.1	18.1
C profile milling	22	30,5	33	38

Special PVS®


PVS® connecting elements with round head for fixing small/medium size profiles to beams.

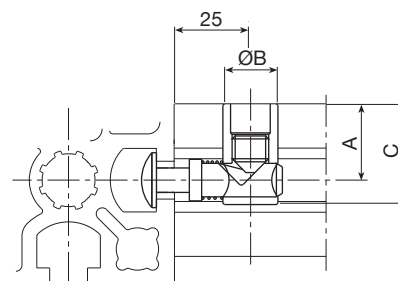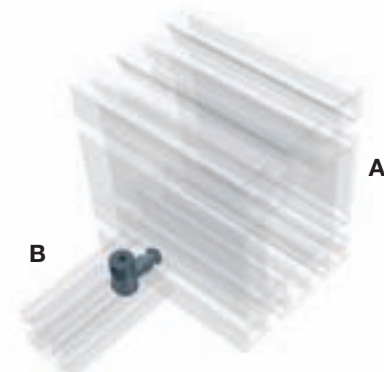

Profile B	Profile A	load-bearing profile
	60	211.0012
	50	211.1849
	45	211.0023
	40	211.0018

Profile base	30	45	50	60
A wheelbase	15	22.5	25	30
B Ø milling	15.1	18.1	18.1	18.1
C profile milling	22	30.5	33	38


PVS® connecting elements with round anchor head and threaded head for beams and plate assembly.

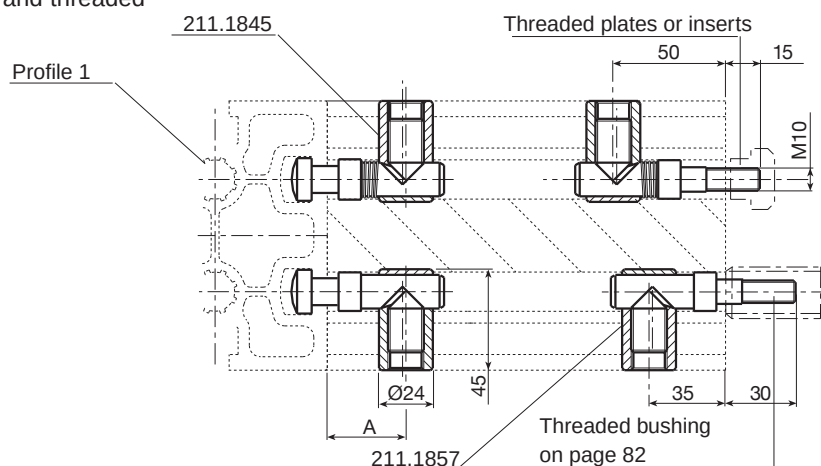

Profile 1	A
LOGYCA and VALYDA	35
STATYCA	38
Threaded version code	211.1857
Round head version code	211.1845

Profile anchor brackets

Material: aluminium alloy (Rs=310 N/mm²).

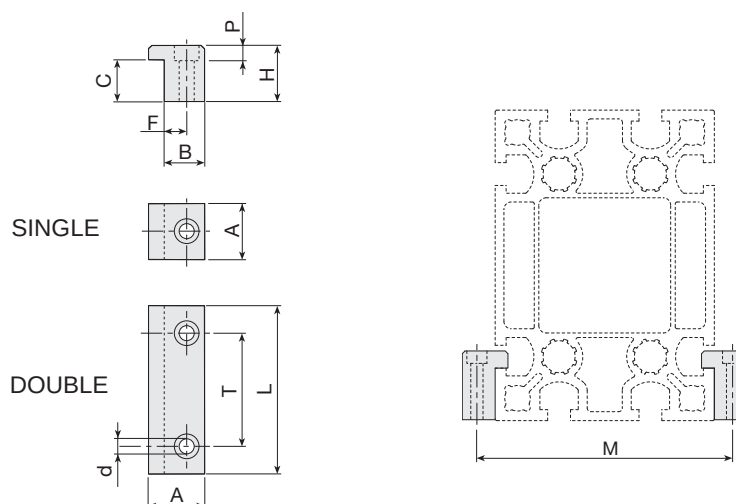


Profile	A	L	T	d	H	P	C	F	B	M	single code	double code
E01-6 ; E01-1 ; E01-3 / E01-4 ; E01-5	30	50	25	9	25	9.5	18	12	22	69/114	415.0772	415.0773
F01-1 / F01-2 horizontal	30	50	25	9	30	9.5	25.3	12	22	84/114	215.0044	215.0043
F01-2 vertical	30	50	25	9	25	9.5	18	12	22	84	415.0772	415.0773
MA1-3 / MA1-5	25	50	25	6.7	27	6.8	20.6	10	18	120	415.0769	415.0764
STATYCA	30	90	50	11	40	11	28.3	14	25	198	415.0767	415.0762
VALYDA horizontal	30	90	50	11	40	11	28.3	14	25	228	415.0767	415.0762
VALYDA vertical	30	90	50	11	50	11	43.1	14	25	148	215.0042	215.0041
LOGYCA	30	90	50	11	40	11	28.3	14	25	248	415.0767	415.0762
PRATYCA horizontal	30	90	50	11	20	11	11.3	14	25	308	415.0768	415.0763
PRATYCA vertical	30	90	50	11	25	11	13.5	14	25	198	-	915.1174
SOLYDA horizontal	30	90	50	11	20	11	11.3	14	25	308	415.0768	415.0763
SOLYDA vertical	30	90	50	11	25	11	13.5	14	25	198	-	915.1174

L-shaped brackets


Joint for small profiles

Mainly used to improve structural rigidity by means of diagonal struts. Can also be used as a hinge to fix command or control devices (consoles, display units, etc.) to existing structures.

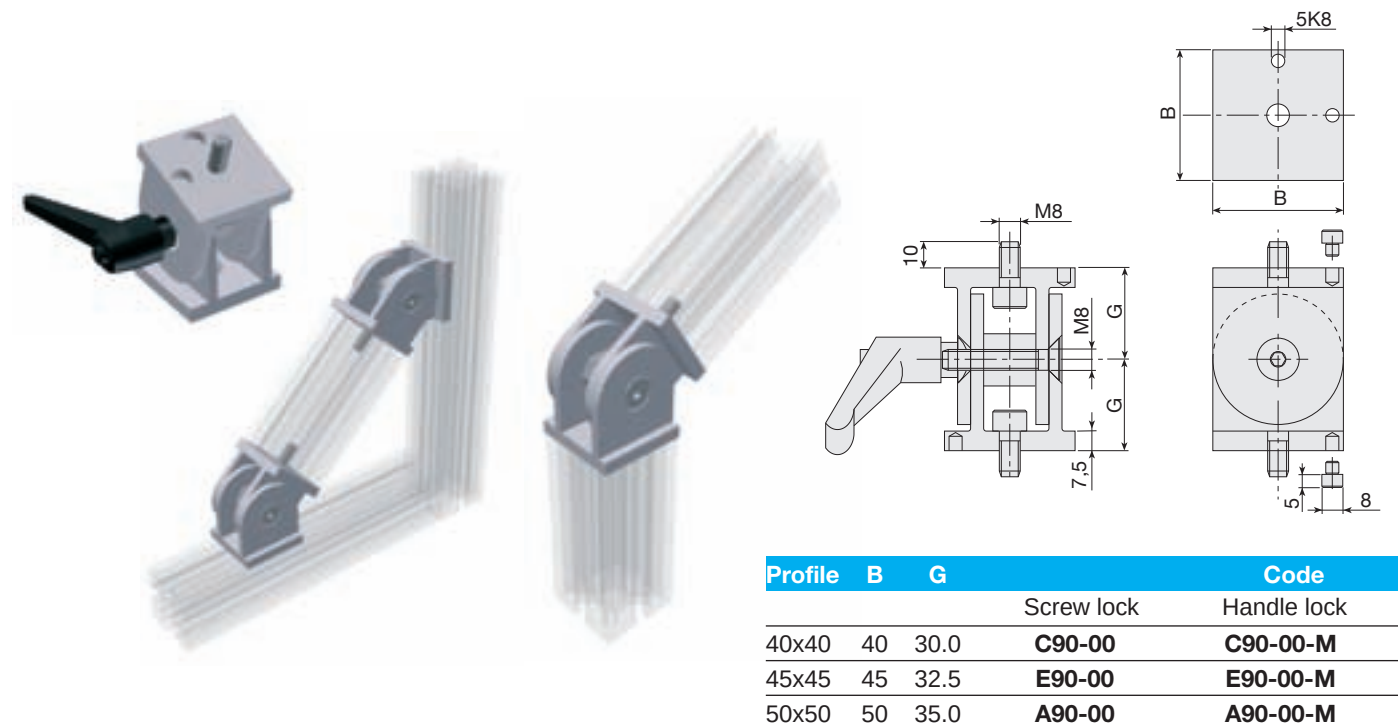

Threaded hole bracket

Threaded hole bracket for mounting additional equipment.
Material: 6060 clear anodized aluminium alloy.

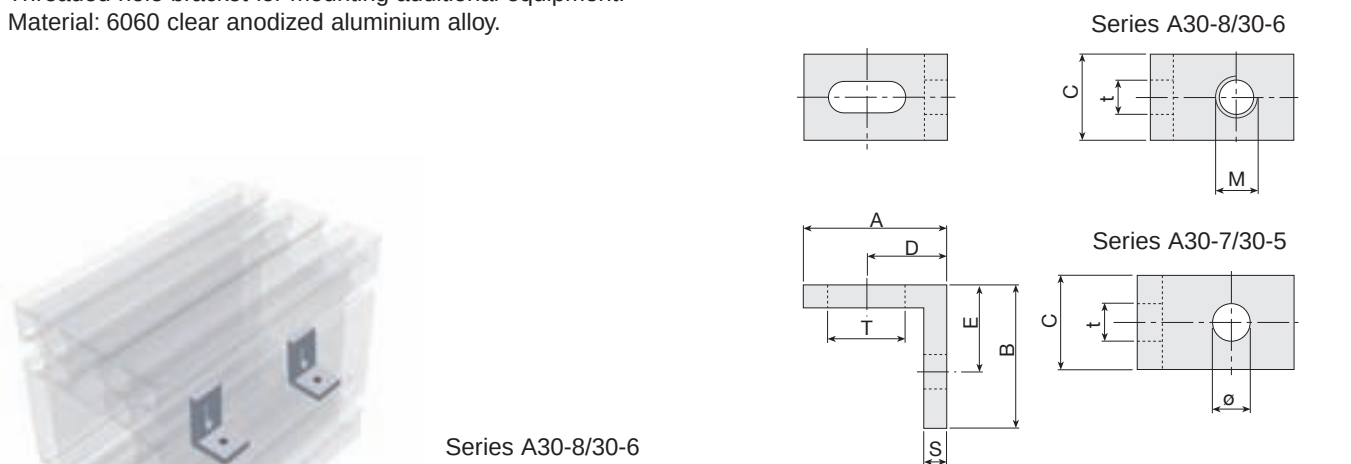

Series A30-8/30-6



Series A30-7/30-5

A	B	C	D	E	S	T x t	M	Code	Ø	Code
45	45	20	25	25	5	15 x 6.5	M6	A30-86	6	A30-76
35	25	20	19	15	5	20 x 6.5	M4	A30-64	4	A30-54
35	25	20	19	15	5	20 x 6.5	M5	A30-65	5	A30-55
35	25	20	19	15	5	20 x 6.5	M6	A30-66	6	A30-56
25	25	15	14	15	4	13.5 x 5.5	M3	B30-63	3	B30-53
25	25	15	14	15	4	13.5 x 5.5	M4	B30-64	4	B30-54
25	25	15	14	15	4	13.5 x 5.5	M5	B30-65	5	B30-55
25	25	15	14	15	4	13.5 x 5.5	M6	B30-66	6	B30-56

Bracket for mounting additional equipment

L-shaped bracket for mounting additional equipment and improving the rigidity of frames made with profiles.


Material: 6060 clear anodized aluminium alloy.

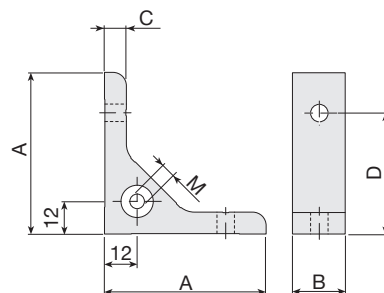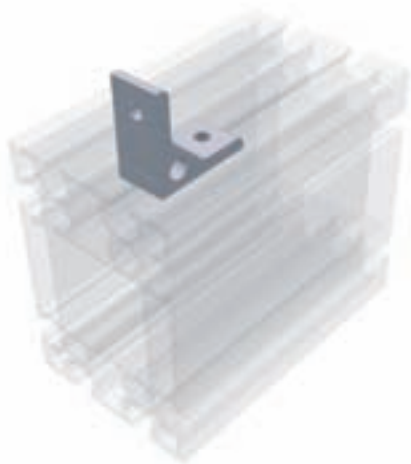

A	B	C	D	E	Ø	M	Code
60	20	8	45	-	6,5	-	B30-10
60	20	8	45	-	6.5	M6	B30-20
60	30	8	45	-	9	-	A30-10
60	30	8	45	-	9	M6	A30-20
38	30	8	25	-	9	-	A30-00
31	20	6	20	-	6.5	-	C30-00

Bracket for mounting additional profiles


Material: 6060 clear anodized aluminium alloy.

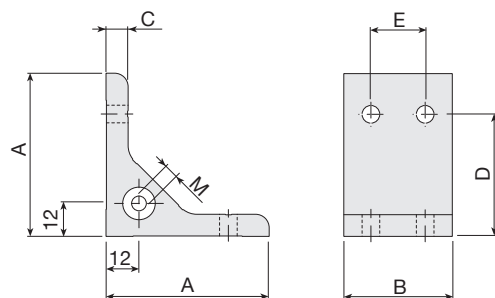

A	B	C	D	E	Ø	M	Code
38	80	8	25	50	9	-	A30-02
31	60	6	20	40	6.5	-	C30-02

Bracket for mounting additional profiles

Material: 6060 clear anodized aluminium alloy.

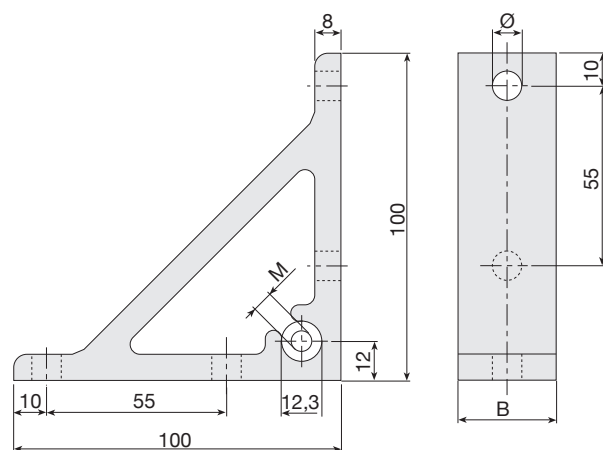


	B	M	Ø	Code
Without bushing	30	-	9	A30-30
Without bushing	20	-	6.5	B30-30
With bushing	30	M6	9	A30-40
With bushing	20	M6	6.5	B30-40

End caps for profiles

The end caps for STATYCA, VALYDA, and LOGYCA (supplied with 4 bushings 207.1892 thr. M20/6) are fixed to the profiles using the 4 holes provided in the centre that must be M20 threaded. PRATYCA and SOLYDA profiles must instead be M6 drilled and threaded as in the areas indicated in the drawing (in this case the end caps are supplied without any bushings). Please specify whether profiles will require end caps.



Material: black polyethylene, 6 mm thick. End caps in 6 mm-thick aluminium alloy are available upon request.

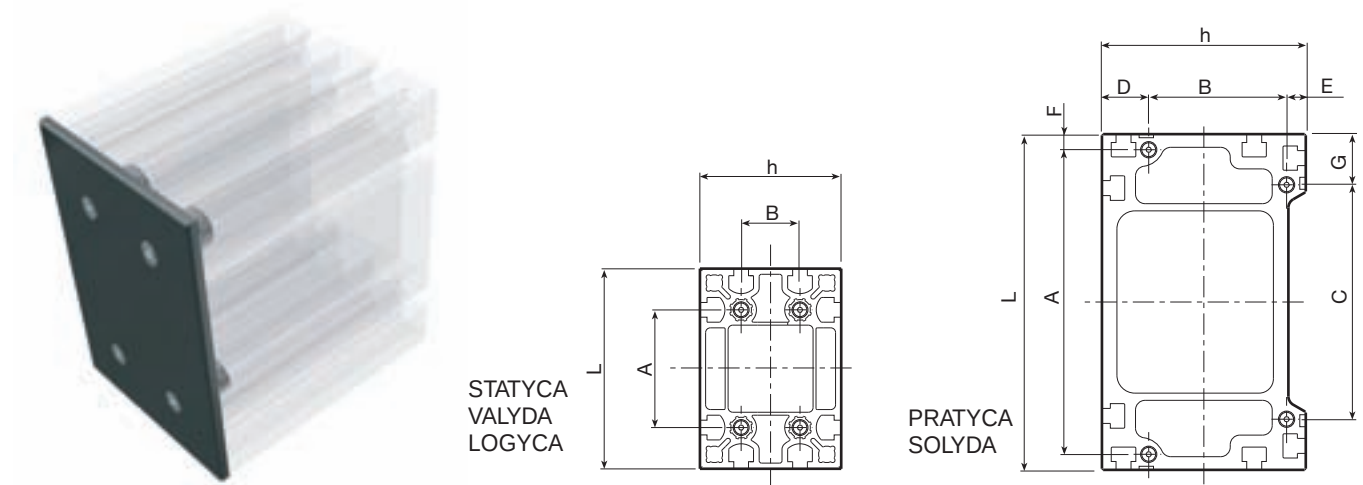

Bearing profile	L	h	A	B	C	D	Code
202.1753 - STATYCA	170	120	100	50	-	-	212.1774
202.1146 - VALYDA	200	120	100	50	-	-	212.1704
202.2184 - LOGYCA	220	120	150	50	-	-	212.2279
202.1147 - PRATYCA	280	170	254	115	195.5	39	212.1705
202.0342 - SOLYDA	360	200	328	141	265	40	212.1706

The end caps for small and medium profiles have no screws or bushes and are fitted simply by exerting moderate pressure on the end of the profile.


Material: black polyethylene, approx. 5 mm thick.

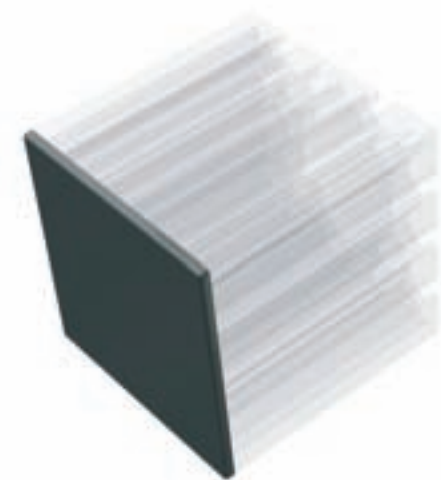

Profile	L	h	Code
MB 1-1	30	30	B40-30
E01-2	60	45	E40-20
E01-3	90	45	E40-30
E01-4	90	90	E40-40
E01-5	180	90	E40-60
E01-11/E01-6/E01-1	45	45	E40-10
E01-7	45	20	-
F01-1	60	60	F40-10
F01-2	90	60	F40-20
MA1-3	150	50	A40-30
MA1-5	100	100	A40-50
E01-13	90	135	E40-10/E40-30

Long cams (type B)



Cams in accordance with DIN 69639 except when marked "#".
Material: steel with hardened and ground surface.

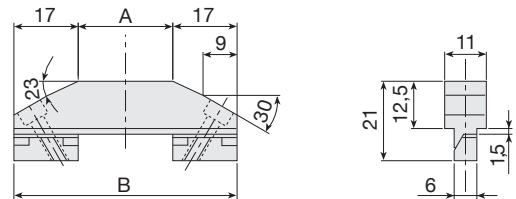

A	B	Code
25	59	211.2132
40	74	211.2133
63	97	211.2134
80 #	114	211.2135
100	134	211.2136

Short cams (type A)


Cams in accordance with DIN 69639
Material: steel with hardened and ground surface.

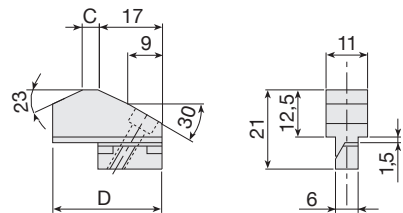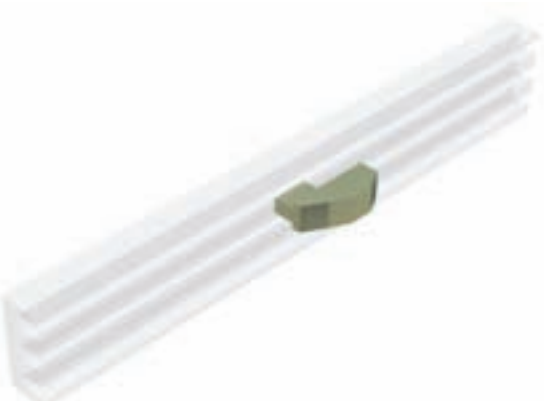

C	D	Code
0	25	211.2128
4	29	211.2129
10	35	211.2130
16	41	211.2131

Cam-holder guide rails

Cams in accordance with DIN 69638
Material: 6060 clear anodized aluminium alloy.

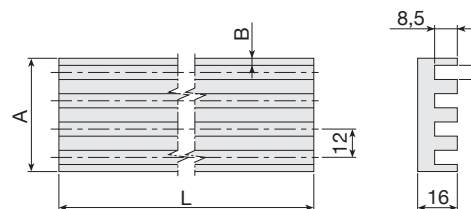



n°	B	A	L	Code
3	3	36	3,000	202.2138
4	5.5	53	3,000	202.2139
6	5.5	77	3,000	202.2140
8	5.5	101	3,000	202.2141

Threaded inserts for small and medium profiles

Inserts for base profiles 30/45/50/60

Material: galvanised steel.

Important: inserts must be inserted into the T-slots before assembling.




Thread	A-B-C Code	Thread	A-B-C Code
M3	B32-30	M4	A32-40
M4	B32-40	M5	A32-50
M5	B32-50	M6	A32-60
M6	B32-60	M8	A32-80
Spring	211.1077	Spring	211.1061

Square nuts

Also suitable for profiles **STATYCA**, **VALYDA**, **LOGYCA**, **PRATYCA** and **SOLYDA**.


Material: galvanised steel.

Important: inserts must be inserted into the longitudinal slots before assembling.



Thread	Code 18x18	Code 20x20
M4	209.0031	209.0023
M5	209.0032	209.0019
M6	209.0033	209.1202
M8	209.0034	209.0467

Plastic compound spring for vertical positioning of insert.




Spring	Code
Suitable for all inserts 18x18	101.0732

Threaded bushings

Material: chrome-plated steel.

M14 or M16 threading is necessary at the end of the profiles.



Profile	M1	M	S	L	Code
Base 30	14	10	10	25	B33-21
Base 30	14	8	8	25	B33-28
Base 30	14	6	6	25	B33-26
Base 45/50/60	16	10	10	25	A33-20
Base 45/50/60	16	8	8	25	A33-28
Base 45/50/60	16	6	6	25	A33-26



Threaded inserts for load-bearing profiles

Tecline

Frontally insertable alignment plates

Material: galvanised steel.



Important: inserts must be inserted into the T-slots before assembling.

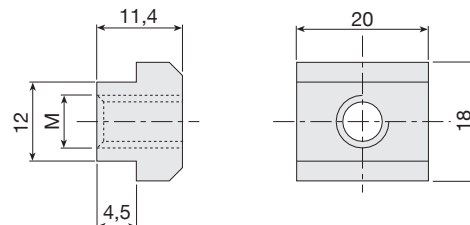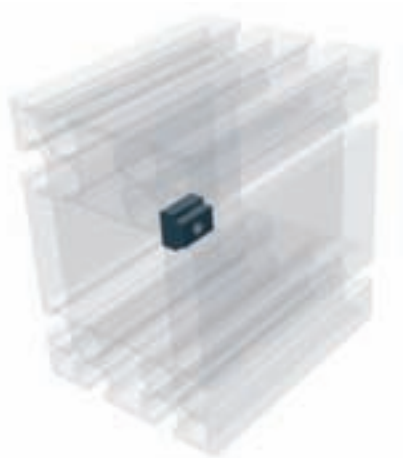

Thread	Code
M5	215.1768
M6	215.1769
M8	215.1770
M10	215.2124

Frontally insertable alignment plates


Material: galvanised steel.

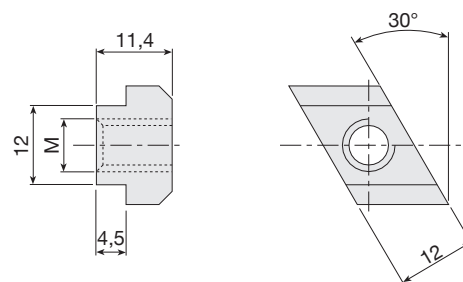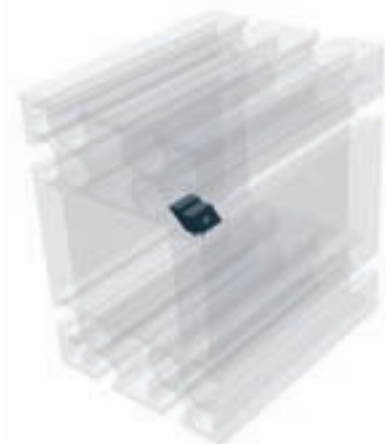

Thread	Code
M5	215.1771
M6	215.1772
M8	215.1773
M10	215.2125

Inserts for base profiles 30/40/45/50/60 with spring, frontally insertable


Material: galvanised steel. With retention spring.

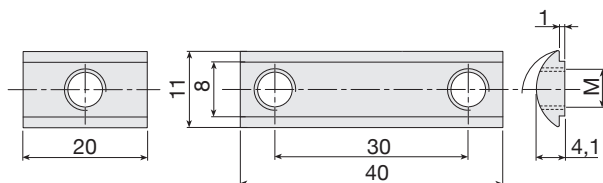

Base	B	H
30	11	4,1
40	13.6	5.9
45-60	14	7.8





Thread	N. holes	L	Base 30 Code	Base 40 Code	45-50-60 Code
M5	1	20	B32-55		A32-55
M6	1	22	B32-65		A32-65
M8	1	22	B32-85		A32-85
M6	2	40	B32-67		A32-67
M5	1	20		C32-55	
M6	1	20		C32-65	
M8	1	20		C32-85	
M6	2	40		C32-67	



Threaded inserts



Also suitable for base-50 profiles, except A32-91 insert.
Material: galvanised steel.

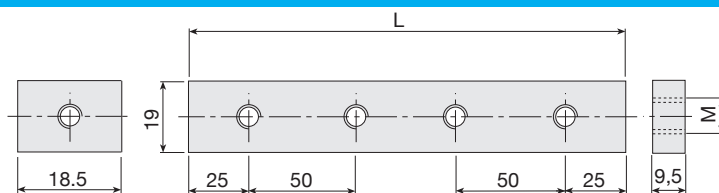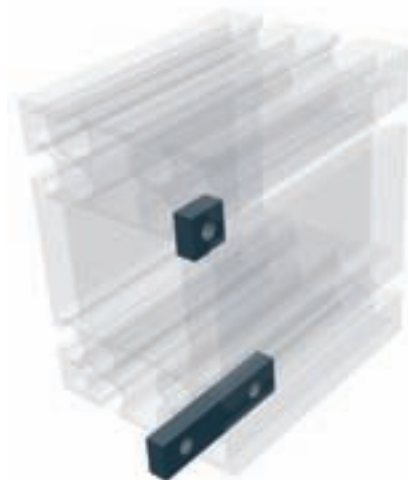

Thread	N. holes	L	Code
M10	1	40	215.0477
M12	1	40	209.1281
M10	1	20	209.1277
M10	2	80	209.1776
M10	3	150	209.1777
M10	4	200	209.1778
M10	5	250	209.1779
M10	6	300	209.1780
M10	7	350	209.1781

Threaded bushings

Material: galvanised steel. M20 threading at the end of the profile is necessary.

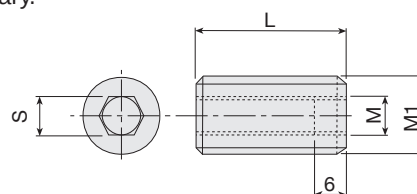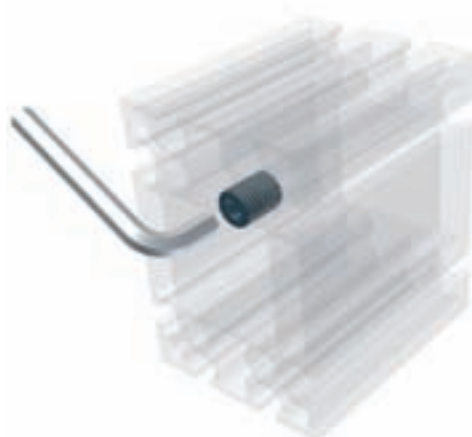



M1	M	S	L	Code
20	6	6	25	207.1892
20	8	8	25	207.1893
20	10	10	25	207.1894
20	12	12	25	207.2288

Dovetail inserts for VALYDA profile

Material: burnished C40.

Important: inserts must be inserted into the longitudinal slots before assembling.

Special sizes are available upon request.

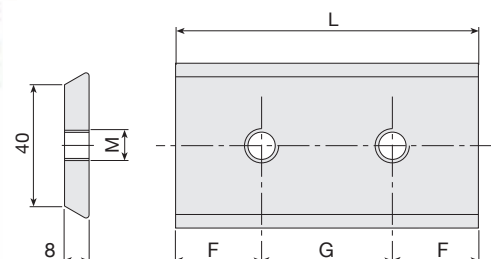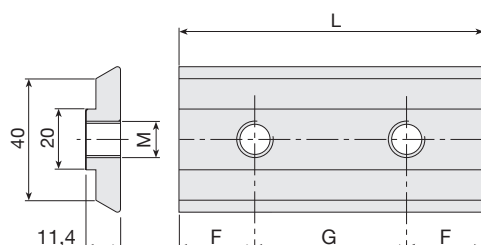

F	G	L	N° holes	M8	M10
25	-	50	1	214.0388	214.0394
25	50	100	2	214.0389	214.0395
25	50	200	4	214.0391	214.0398
25	50	300	6	214.0393	214.0400



F	G	L	N° holes	M10
25	-	50	1	214.0430
25	50	100	2	214.0431
25	50	200	4	214.0433
25	50	300	6	214.0435

Reader system with magnetic scale and sensor

The magnetic scale is applied to the body of the module using a supporting and protective profile.

Precision from ± 0.015 to ± 0.05 mm

Max. speed = 4 - 10 m/s (according to type)

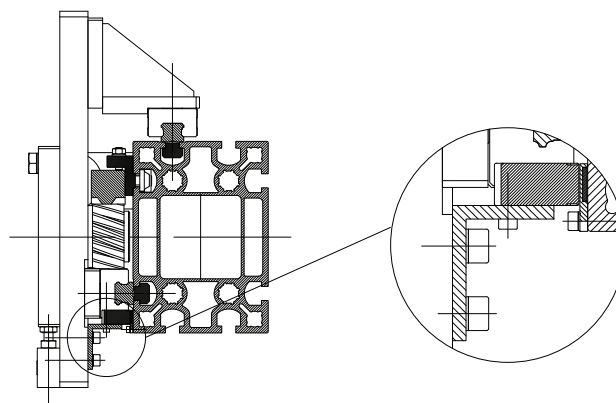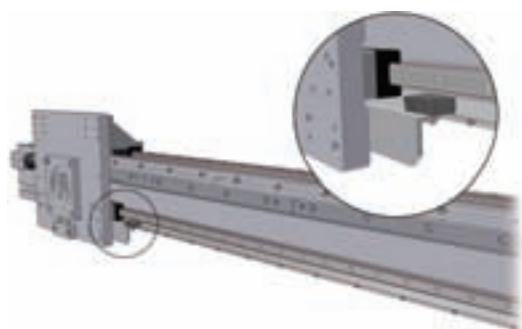

Machining code table

Machining for large profiles

MC1.2	MC1.9	E01.5	MA1.9	2021753	2021146	2022184
...-51/...	...-59/...			...-64/...		...-66/...
...-69/...	...-70/...			...-71/...		...-72/...
...-1/...	...-2/...			...-3/...		...-4/...

KEY

- A** Milling for PVS® housing on X axis.
- B** Milling for PVS® housing on Y axis
- C*** Threading M20x25 for profiles with hole Ø17.5.

E M16x25 for profiles with hole Ø14.

M To be added after the machining code if PVS assembly is required with the profile.

* For square profiles processes 2 C are always performed on the same end in diametrically opposite positions.

*For cut-only profiles, omit the machining code and directly indicate the length.

EXAMPLE OF ORDER:

E01-5 - 72 / 1,525

Length in mm
Machining process
profile type

E01-5 - 72M / 1,525

Length in mm
Machining process PVS assembled
profile type

2021146 / 1,525


Length in mm
profile type


Index

Code	page	Code	page	Code	page	Code	page	Code	page	Code	page
1010732	80	2040032	65	2111845	75	2370005	58	9151174	75	E01-7 (20x40)	12
1110033	61	2040033	65	2111849	74	2370006	58	A20-10	73	E01-8 (20x30)	12
1110034	61	2040034	66	2111857	75	2370013	58	A20-20	73	E20-10	73
1160012	61	2040035	66	2112128	79	2370014	58	A20-60	74	E20-20	73
1160021	61	2040050	64	2112129	79	2370015	58	A20-90	74	E20-60	74
1160022	61	2040052	64	2112130	79	2370016	58	A30-00	77	E20-90	74
1160023	61	2040054	64	2112131	79	2370017	58	A30-02	77	E40-10	78
1160024	61	2040055	64	2112132	79	2370018	58	A30-10	77	E40-20	78
1160025	61	2040474	65	2112133	79	2370019	58	A30-20	77	E40-30	78
1360003	61	2040475	65	2112134	79	2370021	58	A30-30	77	E40-40	78
2010004	60	2041314	70	2112135	79	2370022	58	A30-40	77	E40-40	78
2010005	60	2041315	70	2112136	79	2370023	58	A30-54	76	E40-40	76
2010006	60	2041318	70	2112349	59	2370024	58	A30-55	76	E90-00	76
2010007	60	2041319	70	2112351	59	2370025	58	A30-56	76	E90-00-M	76
2010008	60	2041344	70	2112363	59	2370026	58	A30-64	76	F01-1	13
2010009	60	2041345	70	2112366	59	2370027	58	A30-65	76	F01-2	13
2010012	60	2041348	70	2112367	59	2370028	58	A30-66	76	F20-10	73
2010013	60	2041349	70	2112429	59	2370028	58	A30-76	76	F20-20	73
2010014	60	2041518	66	2113349	59	2370029	58	A30-86	76	F20-60	74
2010015	60	2041519	66	2113351	59	2370030	58	A32-40	80	F20-90	74
2020342	17	2041520	67	2113363	59	2370031	58	A32-50	80	F40-10	78
SOLYDA		2041521	67	2113366	59	2370032	58	A32-55	80	F40-20	78
2021146	16	2041522	67	2113367	59	2370033	58	A32-60	80	MA1-5	14
VALYDA		2041523	67	2113429	59	2370034	58	A32-61	81	MB1-1	12
2021147	17	2041579	65	2121704	78	2370035	58	A32-65	80	PAR 1	18
PRATYCA		2042071	64	2121705	78	2370036	58	A32-67	80	PAR 1/05	34
2021753	15	2042072	64	2121706	78	2370037	58	A32-80	80	PAR 10	32
STATYCA		2042086	68	2121774	78	2370038	58	A32-81	81	PAR 10/6	52
2022184	16	2042092	70	2122279	78	2370039	58	A32-82	81	PAR 10/8	54
LOGYCA		2042093	70	2140388	82	2370040	58	A32-83	81	PAR 2	20
2022138	79	2042094	70	2140389	82	2370041	58	A32-84	81	PAR 2/1	36
2022139	79	2042095	70	2140391	82	2370042	58	A32-85	80	PAR 3	22
2022140	79	2042096	70	2140393	82	2370043	58	A32-86	81	PAR 3/1	38
2022141	79	2042097	70	2140394	82	2370044	58	A32-87	81	PAR 4	24
2030008.L	56	2042098	70	2140395	82	2370045	58	A32-89	81	PAR 4/1	40
2030008.LF	56	2042099	70	2140398	82	2370046	58	A32-91	81	PAR 5	26
2030008.LFX	56	2042100	70	2140400	82	2370047	58	A33-20	80	PAR 5/2	42
2030008.LFXX	57	2042101	70	2140430	82	2370048	58	A33-26	80	PAR 6	28
2030008.LX	56	2042102	70	2140431	82	2370049	58	A33-28	80	PAR 6/2	44
2030008.LXX	57	2042103	70	2140433	82	2370050	58	A40-30	78	PAR 6/4	46
2030027.L	56	2042104	70	2140435	82	2370051	58	A40-50	78	PAR 8	30
2030027.LF	56	2042105	70	2150025	60	2370052	58	A90-00	76	PAR 8/3	48
2030027.LF	56	2042106	70	2150026	60	2371141	58	A90-00-M	76	PAR 8/6	50
2030027.LFX	56	2042107	70	2150027	60	2371142	58	B20-10	73	PAS 1	19
2030027.LFX	56	2042108	70	2150028	60	2371387	58	B20-20	73	PAS 1/05	35
2030027.LFXX	57	2042109	70	2150041	75	2371388	58	B20-60	74	PASM 10	33
2030027.LFXX	57	2042110	70	2150042	75	2371542	58	B20-66	74	PASM 10/6	53
2030027.LX	56	2042111	70	2150043	75	2371543	58	B20-90	74	PASM 10/8	55
2030027.LXX	57	2042283	68	2150044	75	2372013	58	B210-10	73	PASM 2	21
2030028.L	56	2042302	65	2150477	82	2372126	58	B210-20	73	PASM 2/1	37
2030028.LF	56	2050011	63	2151768	81	2372157	58	B30-10	77	PASM 3	23
2030028.LFX	56	2050012	63	2151769	81	2372158	58	B30-20	77	PASM 3/1	39
2030028.LFXX	57	2050013	63	2151770	81	2372159	58	B30-30	77	PASM 4	25
2030028.LX	56	2050014	63	2151771	81	2372301	58	B30-40	77	PASM 4/1	41
2030028.LXX	57	2050053	64	2151772	81	2372398	58	B30-53	76	PASM 5	27
2030030.L	56	2050163	68	2151773	81	2372421	58	B30-54	76	PASM 5/2	43
2030030.LF	56	2050165	68	2152078	80	4060056	68	B30-55	76	PASM 6	29
2030030.LFX	56	2050463	68	2152124	81	4150762	75	B30-56	76	PASM 6/2	45
2030030.LFXX	57	2050464	68	2152125	81	4150763	75	B30-63	76	PASM 6/4	47
2030030.LX	56	2050781.INOX	63	2152137	60	4150764	75	B30-64	76	PASM 8	31
2030030.LXX	57	2050782.INOX	63	2152243	60	4150767	75	B30-65	76	PASM 8/3	49
2030122.L	56	2071892	82	2152281	60	4150768	75	B30-66	76	PASM 8/6	51
2030122.LF	56	2071893	82	2152368	60	4150769	75	B32-30	80		
2030122.LFX	56	2071894	82	2152369	60	4150772	75	B32-40	80		
2030122.LFXX	57	2072288	82	2360010	69	4150773	75	B32-50	80		
2030122.LX	56	2090019	80	2360011	69	4360144	62	B32-55	80		
2030122.LXX	57	2090023	80	2360014	69	4360145	62	B32-60	80		
2030423.L	56	2090298	57	2360015	69	4360146	62	B32-65	80		
2030423.LF	56	2090467	80	2360018	72	4360948	62	B32-67	80		
2030423.LFX	56	2090479	57	2360019	72	4360949	62	B32-85	80		
2030423.LFXX	57	2090480	57	2360021	72	4360951	62	B33-21	80		
2030423.LX	56	2091202	80	2360022	72	4360952	62	B33-26	80		
2030423.LXX	57	2091277	82	2361688	69	4360955	62	B33-28	80		
2040004	64	2091281	82	2361689	69	4360957	62	B40-30	78		
2040005	66	2091776	82	2361690	70	4360958	62	C30-00	77		
2040013	65	2091777	82	2361691	70	4360960	62	C30-02	77		
2040015	65	2091778	82	2362076	70	4360963	62	C90-00	76		
2040016	65	2091779	82	2362079	70	4360965	62	C90-00-M	76		
2040017	66	2091780	82	2362082	70	4360966	62	E01-1 (45x45)	12		
2040018	66	2091781	82	2362083	70	4360968	62	E01-11 (45x45)	12		
2040019	64	2091855	57	2362088	70	4360971	62	E01-13 (90x135)	15		
2040026	66	2110012	74	2362089	70	4360974	62	E01-2 (45x60)	13		
2040027	66	2110018	74	2362090	70	4360984	62	E01-3 (45x90)	13		
2040028	66	2110023	74	2362091	70	4360986	62	E01-4 (90x90)	14		
2040030	66	2111061	80	2370002	58	4360987	62	E01-5 (90x180)	15		
2040031	66	2111077	80	2370004	58	7400568	14	E01-6 (45x45)	12		

ROLLON®
Linear *E*volution

Modline

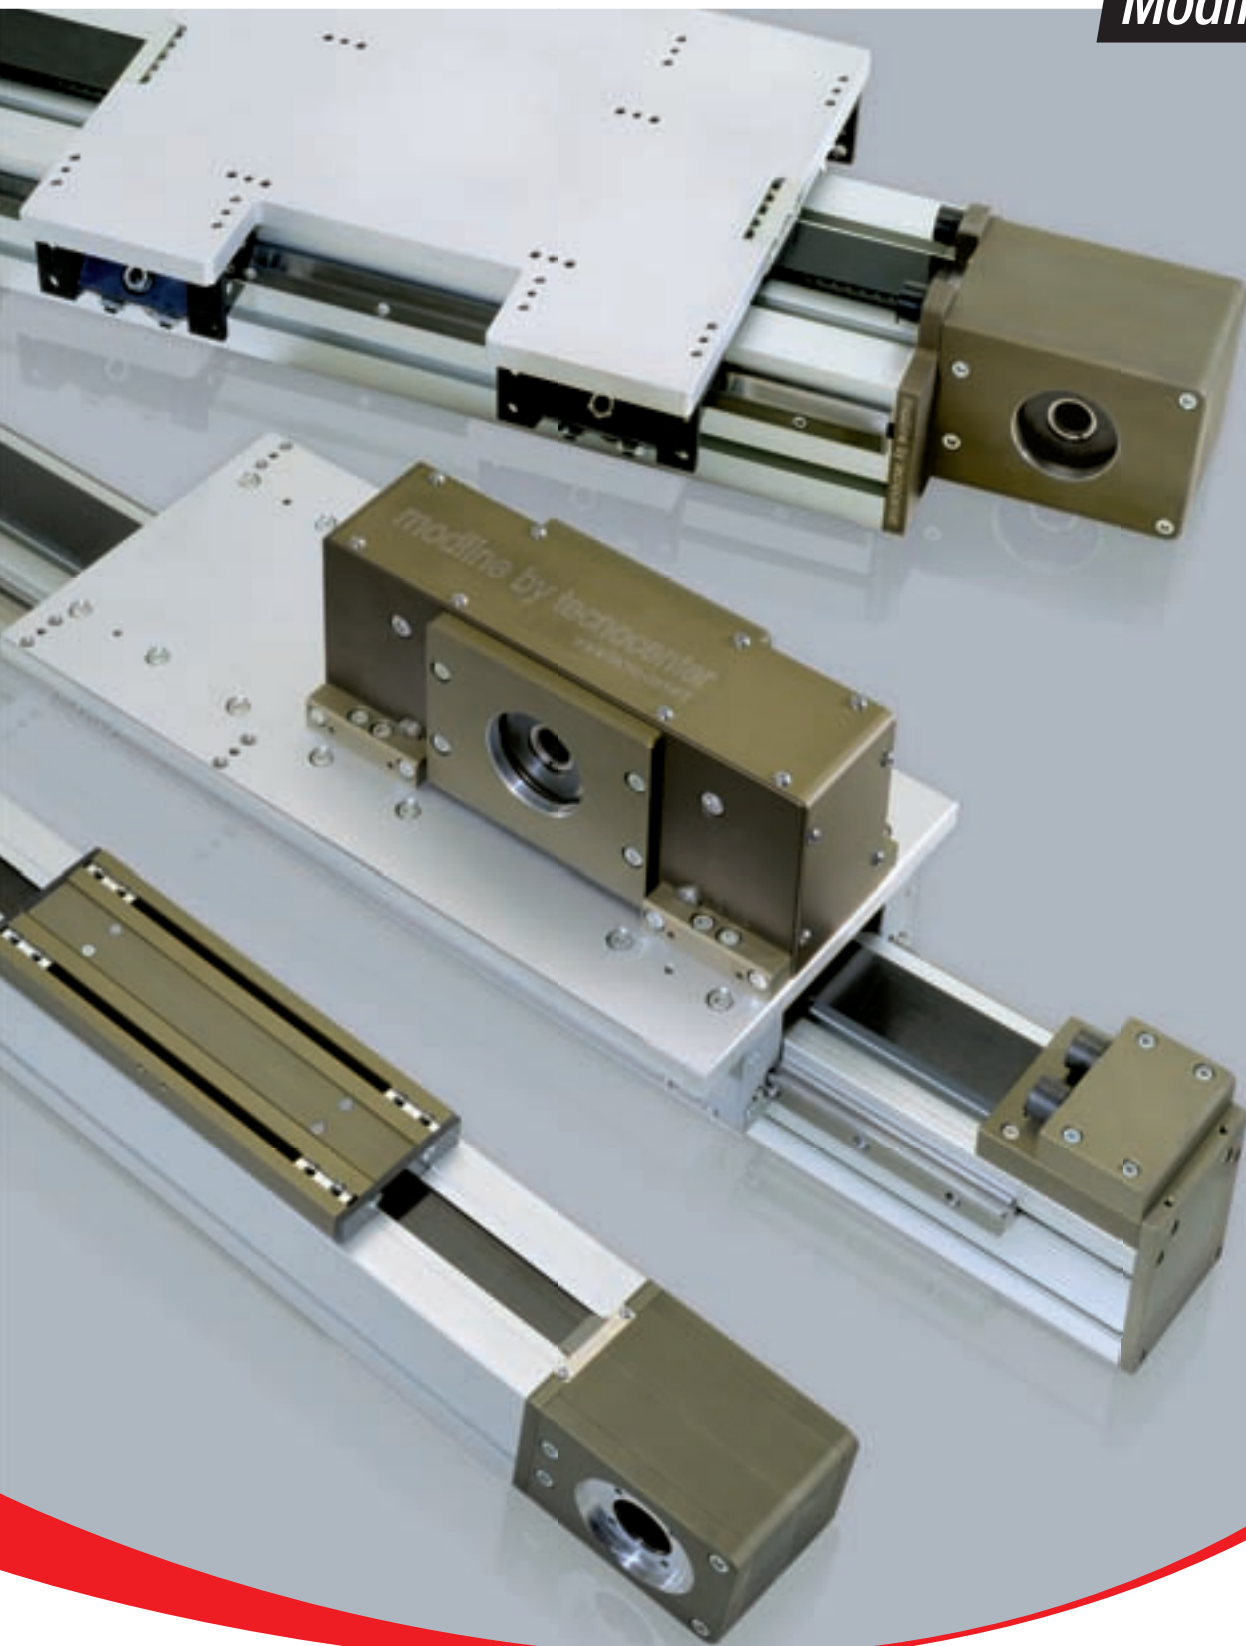

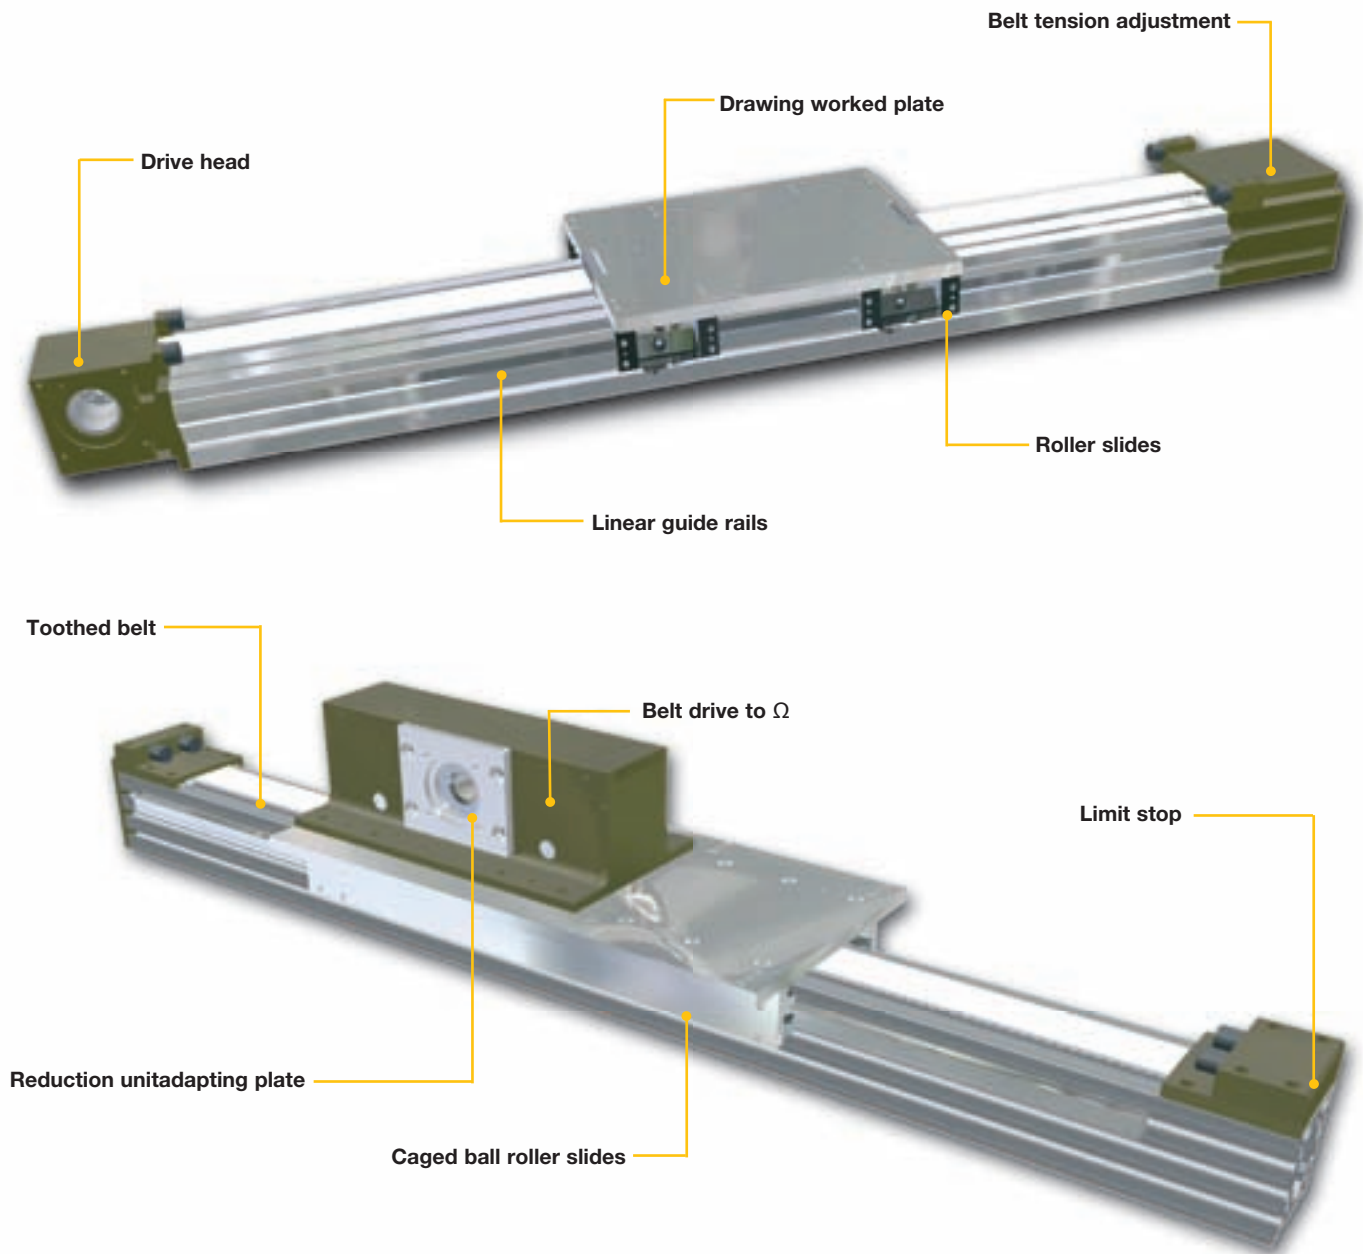

Modline linear modules are ready-to-use linear guide systems with high accuracy, speeds and load performances.

Our experience in the fields of the automotive plants, painting, plate working, manufacturing machines and palletization systems has allowed us to widen our product range with the most advanced technical solutions.

Our products stand out for their:

- high quality and **competitive performances** (profiles up to 12m)
- **without play transmissions** achieved by high torque couplings
- **beams** with transversal stiffening ribs and preset for threads on profile ends
- **accurate scaling** and consequent reduced maintenance
- **fast** and accurate **belt** or without play screw drives
- the most **complete range** of accessories

The Modline linear module strong points are:

- A complete series of linear units to build up 3 or more axis cartesian robots
- Linear modules with linear guides suitable for parallel assembling
- Choice between strong steel linear guides with rollers or accurate caged ball roller slides and guides
- Choice between mobile carriage or fixed carriage and mobile profile
- Wide and complete solutions for control systems; programmable cards on request
- On request: assembling of E-chain cable carriers, reduction units, stiffening angle bars
- Drawing worked carriage plates
- Accessories and compatibility for pinion/rack drive unit integrated assembling



Construction Features	2
Assembly and lubrication specifications	3
Introduction – operation and control unit - tightening specifications	4
Standard assembly solutions	5
Sizing template	6
Sizing request form	7
Preliminary selection table (1-2-3 axes)	8
Special applications with standard modules	9
Assembly positions and order code setting	10
Order Code	11
Profile specifications	12

M MODULES WITH BELT DRIVE



MCR 65 with rollers	16
MCS 65 - MCH 65 with caged ball roller slides	17
MCR 80 with rollers	18
MCS 80 - MCH 80 with caged ball roller slides	19
MCR 105 with rollers	20
MCS 105 - MCH 105 with caged ball roller slides	21
MCLL 105 with twin guide and caged ball roller slides	22

MODULES WITH SCREW DRIVE



MVR 80 - MTR 80 trapezoidal screw and rollers	23
MVR 105 - MTR 105 with ball / trapezoidal screw and rollers	24
MVS 105 - MVH 105 with ball / trapezoidal screw and rollers	25
MVHH 105 with ball screw and caged ball roller slides	26
TVH 180 with ball screw and caged ball roller slides	27
TVS 170 with ball screw and caged ball roller slides	28
TVS 220 with ball screw and caged ball roller slides	29

T MODULES WITH BELT DRIVE



TCG 100 with shaped rollers	30
TCH 100 - TCS 100 with caged ball roller slides	31
TCR 180 - TCG 180 with rollers	32
TCH 180 - TCS 180 with caged ball roller slides	33
TCRQ 170 with rollers	34
TCH 170 - TCS 170 with caged ball roller slides	35
TCRQ 200 with rollers	36
TCH 200 - TCS 200 with caged ball roller slides	37
TCRQ 220 with rollers	38
TCH 220 - TCS 220 with caged ball roller slides	39
TCRQ 280 - TCRP 280 with rollers	40
TCH 280 - TCS 280 with caged ball roller slides	41
TCRP 360 with rollers	42
TCH 360 - TCS 360 with caged ball roller slides	43
TECRQ - TECH 170 (EASY) with roller or recirculating ball slides	44
TECRR 180 - TECH 180 (EASY) with trapezoidal guides and roller slides	45



Z MODULES WITH OMEGA BELT DRIVE



ZCG 60 with shaped rollers	46
ZCL 60 with caged ball roller slides	47
ZCG 90 with shaped rollers	48
ZCRR 90 with rollers	49
ZCL 90 with caged ball roller slides	50
ZCY 180 with guide profile and shaped rollers	51

This document replaces all previous editions.
Due to the constant progress of our research we reserve the right to modify drawings or features without notice.
No part of this catalogue may be reproduced without written permission of the copyright owner.
All rights reserved.
This catalogue has been accurately checked before publishing.
However, we disclaim all responsibility in case of errors and omissions.



Certified company UNI EN ISO
9001:2008 e ISO14001:2004

Edition 03-2015

ZCRQ 100 with rollers	52
ZCL 100 with caged ball roller slides	53
ZCRQ 170 - ZCERQ 170 with rollers	54
ZCL 170 - ZCEL 170 with caged ball roller slides	55
ZCRQ 220 - ZCERQ 220 with rollers	56
ZCL 220 - ZCEL 220 with caged ball roller slides	57
ZMCPLL 105 - ZMCLL 105 with pneumatic counter balance	58
ZMCH 80 - ZMCH 105 with pneumatic counter balance	59



K MODULES WITH BELT DRIVE

KCH 100 - 150 - 200 with recirculating ball slides	60
KCH 30 with recirculating ball slides	61
KCH 50 with recirculating ball slides	62



ACCESSORIES AND APPLICATIONS

Drive Pulley Bores for Shrink Discs	63
Adapter Flanges	64
Connecting shafts for parallel modules	65
Spare rollers - mounting brackets	66
Accessories and screws	67
Front insertable nuts and plates	68
Threaded nuts and plates	69
Alignment nuts	70
Micro-switch supports - cams and cam-holders for micro-switches	71
Special Options	72
Special applications	73
Anti-drop system - safety lock-pin device	74
Index	76



Construction Features

Beams

Obtained from Tecno Center extruded and anodised aluminium alloy profiles. Material features: Al Mg Si 0.5 hardened and tempered, F25 quality, Rm 245 N/mm², tolerance as per EN 755-9 and EN 12020-2. Profiles have been specially designed to achieve high stiffness and long lengths (up to 12 m), in order to obtain solid, lightweight structures, suitable for the construction of linear transfer machines.

Plates

Obtained from aluminium alloy rolled sections, tensile strength Rm 290 N/mm², HB 77, high performance. On request we perform machining work on all standard plates (D code) and according to detailed customer drawings.

V-shaped guide rails

In hardened and ground high carbon steel (min. hardness 58 HRC). (Anti-oxidation coating upon request).

Guide rails for caged ball roller slides

S version: high performance, with cage, primary producers. L version: high dynamics, medium loads.

H version: standard performance and limited dynamics.

Roller slides

Body in aluminium alloy G AL SI 5 hardened and tempered according to UNI 3600 or Alloy 6082, rollers with double rows of angular contact ball bearings, backlash-free, long life lubrication: Ø 30, Ø 40, Ø 52, Ø 62 mm rollers. Adjustable tolerance between rollers and guide rails. Complete with new felt scrapers.

Toothed drive and driven pulleys

In C40 steel with coupling toothing on the polyurethane belt, backlash-free, with anti-oxidation treatment. Equipped with large, watertight bearings, capable of withstanding high work performance, due to the use of the multicarriage with durable, alternating backlash-free movements.

Toothed belts

In durable polyurethane, fitted with high-resistance reinforced with high tensile strength steel cords, which prevent the belt from lengthening over time. They are grease, oil and gasoline-proof and can work at temperatures from - 30° up to +80°. The belt is fastened to the plate by means of a hooked support. The belt can be serviced without disassembling the equipment on the plate (standard versions).

Shrink-discs, shafts and pulleys

All models shown in the catalogue work with the standard conical shrink-disc drive system to lock the driving shaft and the driven shaft if present. Gearbox or shaft adapting plates are supplied upon request, as per drawing.

Bumper Stops

Important: the rubber stop pads provided with standard linear models are suitable and regarded as static limit switches. For special needs, such as safety stops if the drive breaks, please specify loads, dynamics, details and discuss the use of specific parts, accessories and devices (reinforced plates and attachments - shock absorbers, safety and/or anti-drop devices, etc.) with our technical dept.

Anodizing

We supply all linear modules equipped with: natural, anodised aluminium alloy profiles (min. 11µ), driving heads, driven heads, carriages (MC series), counter plates, in dark bronze anodizing (min. 11µ).

Anti-oxidation parts and coatings

Modules are also available with anti-oxidation coating. Materials and coatings are selected according to the environment of use (food industry, marine environment, etc.).

Main features of the roller translation system

The translation system consists of a plate to which two roller slides with concentric pins and two with eccentric pins are fixed. The eccentric pins are suitable for adjusting backlash between the roller slide and the sliding track. Check that the angular position of the rollers is such that they can support the max. working load (page 10).

Guide rails and roller slides are particularly suitable for use in dusty and aggressive environments.

Important: during adjustment, overloading is easily achieved: this may result in premature wear.

NB: always keep friction low. If friction is high, loosen and repeat the adjustment.

Main features of the caged ball roller slides translation system

The sliding system guarantees high performance in terms of precision and load resistance, reduced maintenance and stiffness thanks to the connecting slots of the profile.

All guide rails are directly fixed onto the profile surface, appropriately machined to guarantee geometric and dimensional tolerances, paying attention to the parallelism between them. In large modules, any profile flatness or parallelism errors are corrected by means of the appropriate machining procedures. Please inform our technical dept. of any specific application requirements.

Lubrication

Roller slides and caged ball roller slides

Roller slides are provided with a permanent lubrication system which, if properly used, eliminates the need for any further maintenance, also considering the average life of any handling device. As for screw modules, the caged ball or V screw requires periodical lubrication.

For applications on plants with a high number of daily cycles, or with a significant build-up of impurities, please check the need for lubrication, seals and additional tanks with our technical dept. Do not use solvents to clean rollers or roller slides, as you could unintentionally remove the grease lubricating coat applied to the rolling elements during assembly.

Use lithium soap based mineral grease according to DIN 51825 - K3N. Read the instruction manual



Complete central lubrication system. Grease cartridge upon request.

Guide rails

If properly assembled, guide rails do not require any lubrication, which would attract impurities and have negative consequences. Should there be any surface defects on the guide rails and/or on the rolling parts, such as pitting or erosion, this might be due to an excessive load. In this case, all worn parts must be replaced and the load geometry and alignment checked.

Introduction - operation and control unit

On request, we can supply systems complete with specific motor drives for industrial automation applications, suitable for specific handling tasks according to the customer's needs (moving loads, accelerations, speeds, cycle times, resolution, repeatability).

These can be equipped with gearboxes, servomotors, mechanical limit switches, proximity switches and various accessories, such as energy chains, interface plates, fixing supports.

Our technical dept. is at your complete disposal for any scaling requirements and the choice of moving unit and electromechanical parts suitable to achieve the required performance levels. We can draw on our experience to help our customers in their choice of linear unit and the following parts:

gearboxes: worm screw, planetary, bevel;

motors: stepper, brushless, DC, asynchronous.

For each of these we can propose drives manufactured by primary producers marketed in Italy and abroad suitable for the calculated power ratings.

Tecno Center is able to support the customer in choosing complete systems equipped with axis control, with or without interpolation, with or without PLC, suitable for operating handling cycles and machine management. The customer has only to provide for piping and wiring.

Application examples:

glue dispensing units

paint or resin distribution units

load/unload of manufacturing machines

pick and place systems







control and sensing instrument handling

drilling PCB boards

cartesian robots with 2, 3 or more axes


Tightening specifications

During set-up, make sure all parts are locked with the appropriate screws and with the right tightening torques.

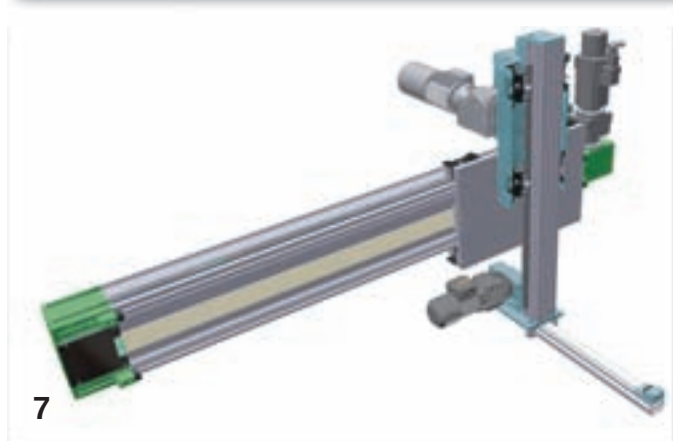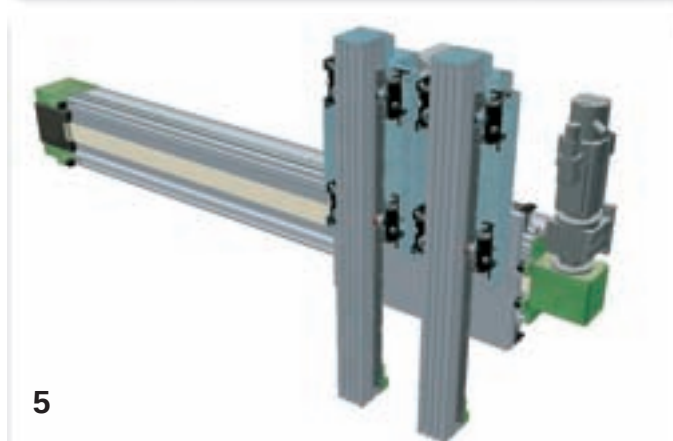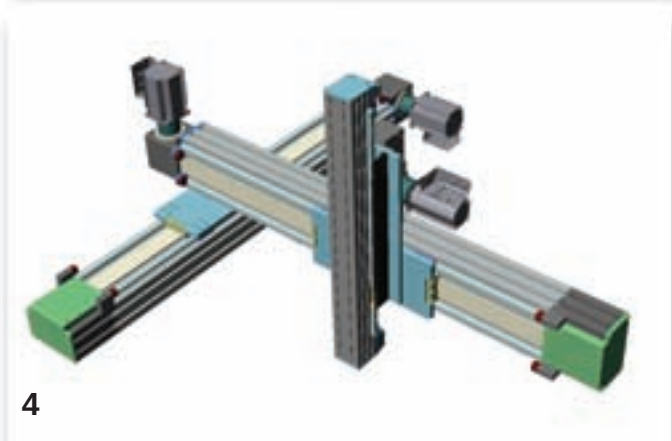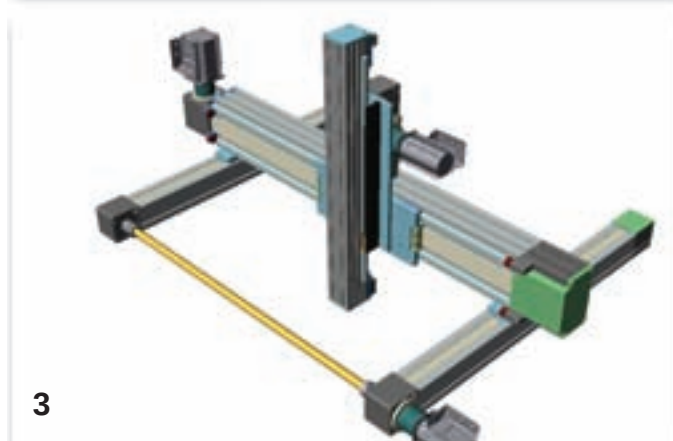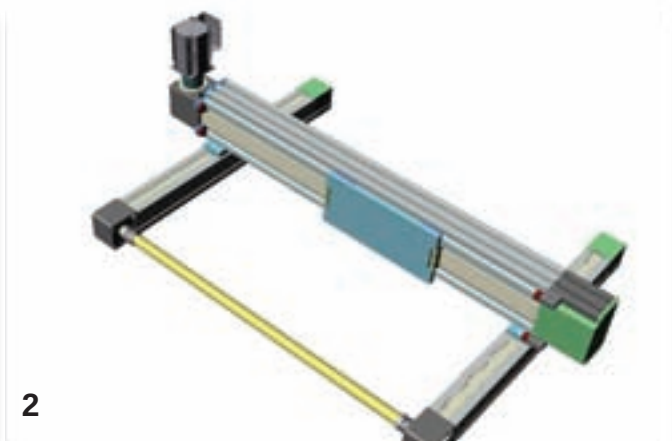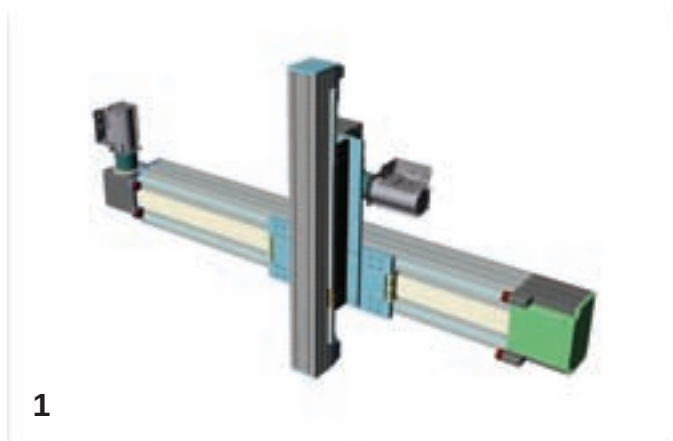

Sizing template

Our **Technical Support dept.** is available to check sizing calculations. Please fill in the form with all the necessary data and send it to our technical dept., which will suggest the most suitable size according to the forces applied and precision required.

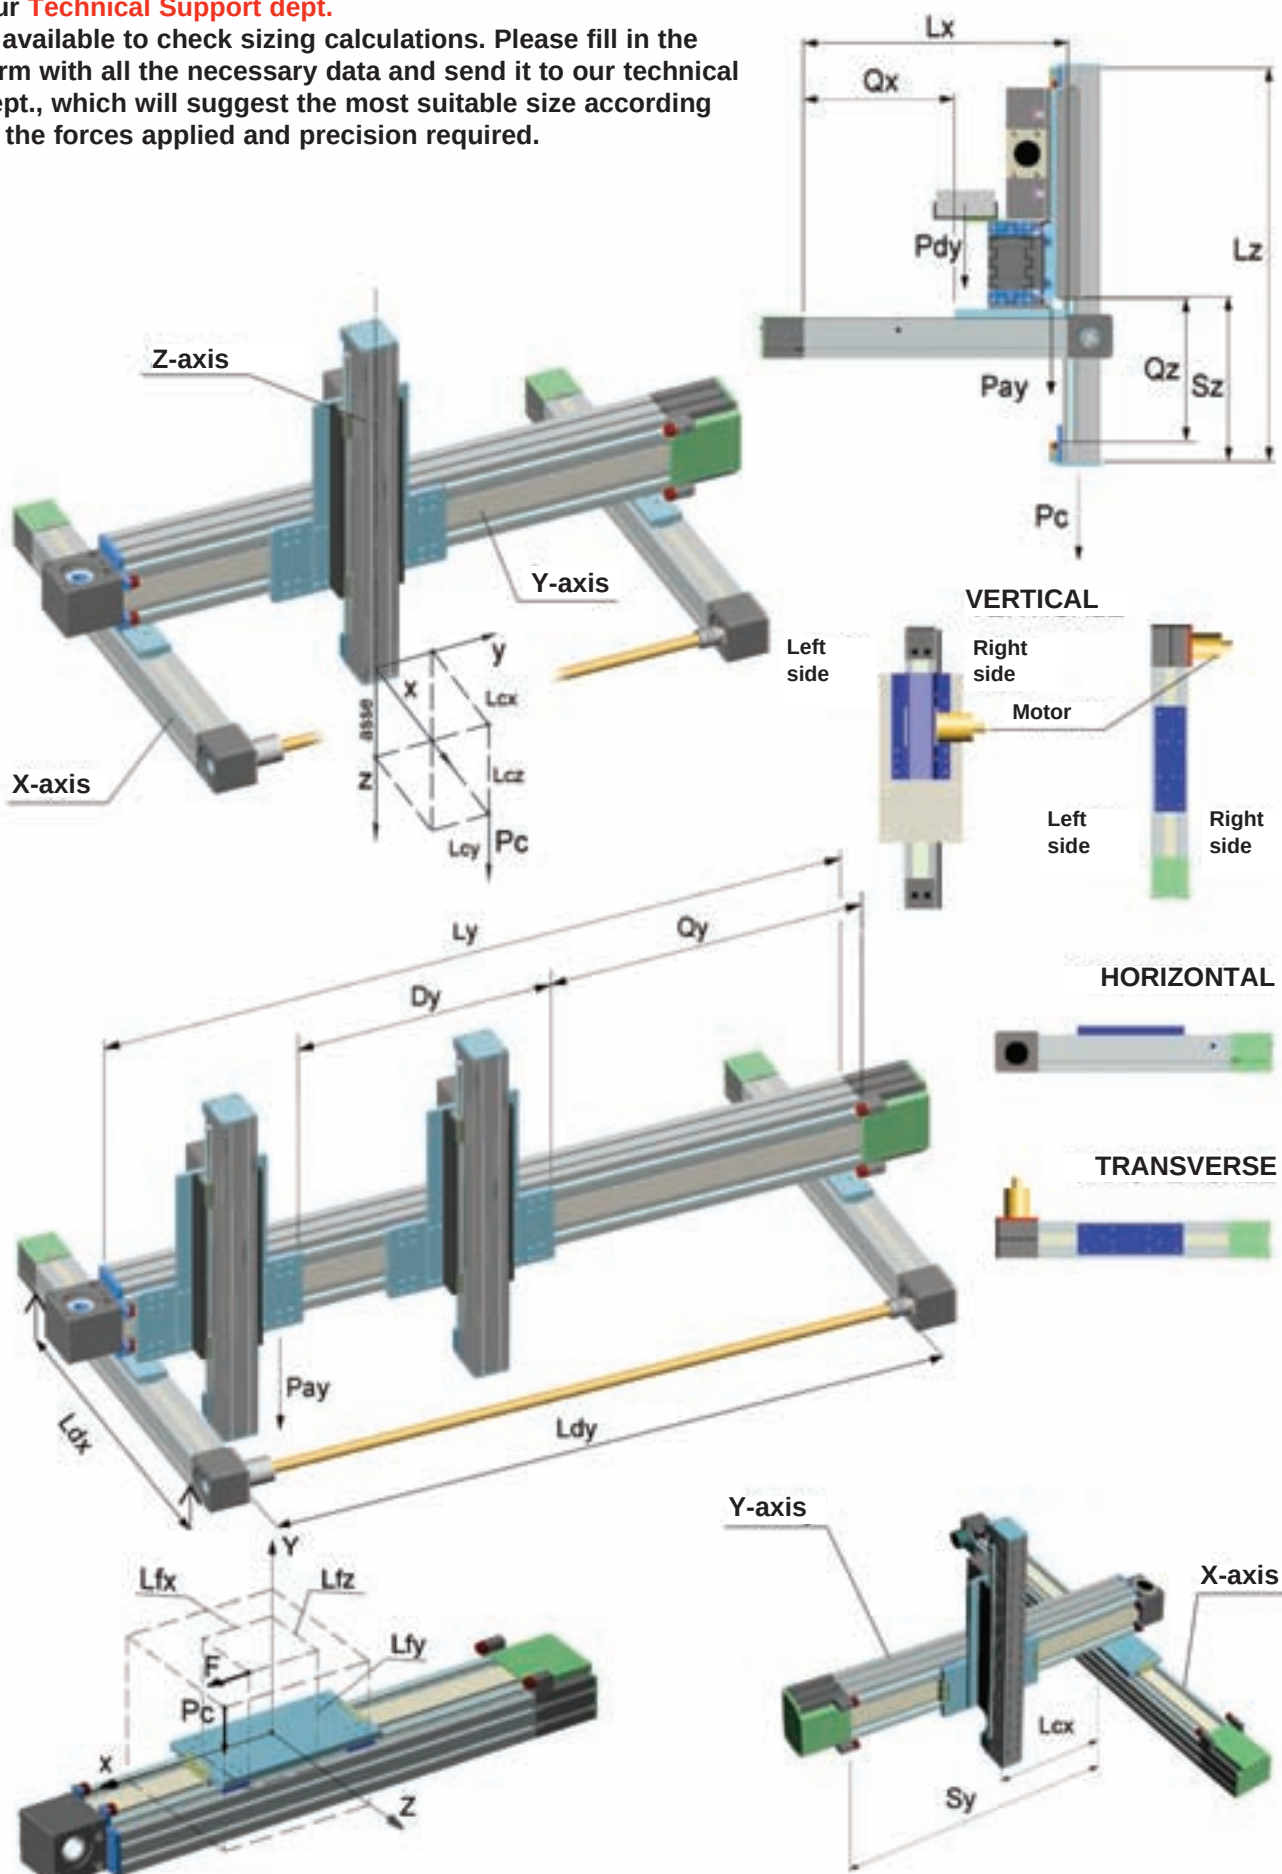

Sizing request form

Modline

For a proper definition of the linear units, fill in the scaling request form and send it to the Technical Support Department.

Date:Request N°:.....

Filled in by:.....

Company:

Address:.....

Tel.:Fax:.....

E-mail:.....

ROLLON S.p.A. - ITALY

Via Trieste 26

I-20871 Vimercate (MB)

Phone: (+39) 039 62 59 1

www.rollon.it - infocom@rollon.it

Sizing template

required data

optional data

MODLINE linear modules

ASSEMBLY SOLUTIONS (see page 5) no.

Total length

Total working load including EOAT (add Z axis for Y and X axes)

Equipment weight on carriage (gearbox, cylinder, OPTIONAL)

Weight distributed on the beam (energy chain)

Profile supports

Max. projection (any cantilever, the largest)

Max. span

Offset load's centre of gravity (X-axis)

Offset load's centre of gravity (Y-axis)

Offset load's centre of gravity (Z-axis)

Any additional force

Offset additional force (X-axis)

Offset additional force (Y-axis)

Offset additional force (Z-axis)

Possible distance between the carriages

Transmission performance

Assembly: vertical= 90° - slope = 30°, 45°, 60° - horizontal

Stroke

Speed

Acceleration

Cycle time

Positioning accuracy


Repeatability

Work environment (temperature and cleanliness)


Daily working cycles

Z-axis		Y-axis		X-axis	
Lz		Ly		Lx	[mm]
Pc		Py		Px	[kg]
Paz		Pay		Pax	[kg]
Pdz		Pdy		Pdx	[kg/m]
		n°		n°	
Sz		Sy		Sx	[mm]
		Ldy		Ldx	[mm]
Lcx					[mm]
Lcy					[mm]
Lcz					[mm]
F					[N]
Lfx					[mm]
Lfy					[mm]
Lfz					[mm]
Dz		Dy		Dx	[mm]
=					
α=					
Qz		Qy		Qx	
Vz		Vy		Vx	[m/s]
Az		Ay		Ax	[m/s ²]
Tz		Ty		Tx	[s]
+/-					
+/-					[mm]
n°					

Working cycle

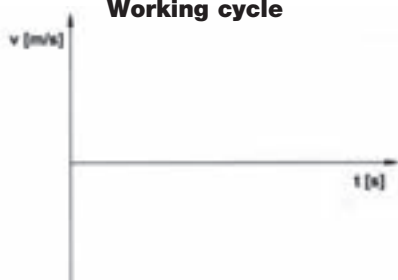

Example working cycle



Notes:.....

.....

.....

.....

Preliminary selection table (1-2-3 axes)

These tables are useful for making a preliminary selection with load applied in a central position with respect to the plate or profile axis. Z axis length is < 1600 mm. Deflection is computed assuming continuous beams having the same span and concentrated static loads.

In the following table, select the appropriate X axes according to the load

	PA	2X	3X	4X	5X	6X	8X	10X	LC
	Deflection								
Max. Load capacity [kg.]									
50		1.4							5000
100		1.8							5000
200		2.7	1.8						5000
300			2.3	2.7					5000
400				3.3	2.4				5000
500					2.8	1.8			5000
600						2	2		6000
800							2.5	1.8	6000
1000								2.1	7000

NB: for vertical 8X and 10X portals, compensate the load

From the table below, select the most suitable combination of Y-Z axes depending on the load.

	PA	2/1	3/1	4/1	5/2	6/2	8/3	6/4	8/6	10/6	10/8	LC
	Deflection											
Max. Load capacity [kg.]												
50		1.9										5000
100		2.4	1.7	2	1.6							5000
200					2.2	0.8	0.8					5000
300						1.6	1.6	1.6				6000
400								1.9	2	0.9		6000
500									2.2	1		6000
600									2.5	1.2	1.2	6000
800											2.2	7000

From the table below, select the most suitable combination of X-Y-Z axes depending on the load.

	Y-Z-axis										
	PA	2/1	3/1	4/1	5/2	6/2	8/3	6/4	8/6	10/6	10/8
	Load [kg.]	100	100	100	200	200	300	400	600	600	700
X-axis	2X										
	3X										
	4X										
	5X										
	6X										
	8X										
	10X										

NB : the choice of X axis is based upon the actual load, the supporting points, max. deflection and the total weight of the Y-Z axes

EXAMPLE: selection of 3-axis system with roller slides

(Please see page 7 and the system pages for the nomenclature)

DATA: Total working load 300 kg, X axis stroke: 5,000 mm, Y axis stroke: 4,000 mm, Z axis stroke: 2,000 mm, support points: 2

By analysing the table of Y-Z axes based on the working load (Pc), profile length (Ly) and deflection, the selection falls on one PA 8/3 (load 300 kg.) portal

Check: $P_{eff} = P_{max} - (L_z - 1,600)/1,000 \cdot q_z = 300 - (2,900 - 1,600)/1,000 \cdot 35 = 254.5 \text{ kg.} < di \text{ 300 kg.}$ Therefore select the larger size PA 6/4 (max. load capacity 400 kg.)

$M_{tot} \text{ PA 6/4 (Y+Z)} = M_{base} + (q_y \cdot stroke_y + q_z \cdot stroke_z)/1,000 + P_c = 244 + (66 \cdot 4,000 + 48 \cdot 2,000)/1,000 + 300 = 904 \text{ kg.}$

$P_{tx} = M_{tot} \text{ PA 6/4 (Y+Z)} \cdot 0.66 = 596.6 \text{ kg.}$


$L_x = stroke_x + 1,200 \text{ approx} = 5,000 + 1,200 = 6,200 \text{ mm}$

By analysing the table of X axes based on the load (Ptx) profile length (Lx) and deflection, it is possible to select two PA 6X linear axes


Chosen composition: n°1 PA 6/4 + n° 2 PA 6X

Perform a final analysis by computing the deflection based on the actual size of the spans. Our technical dept. is at your complete disposal to help you examine the most suitable applications for your requirements.


X-Axis






Y-Z-Axis



X-Y-Z-Axis

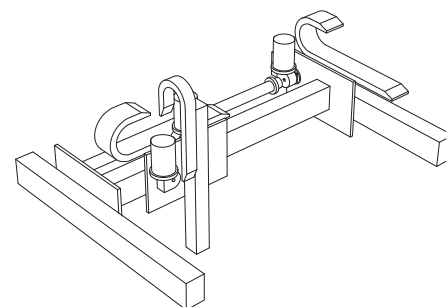


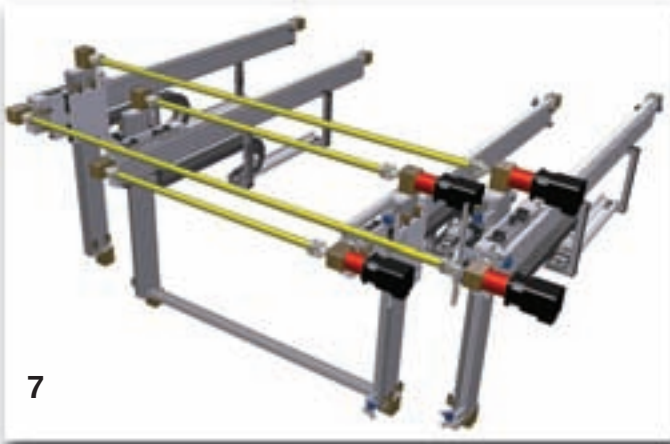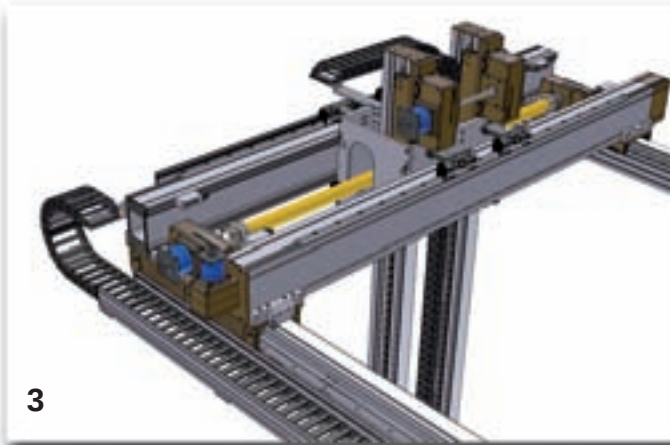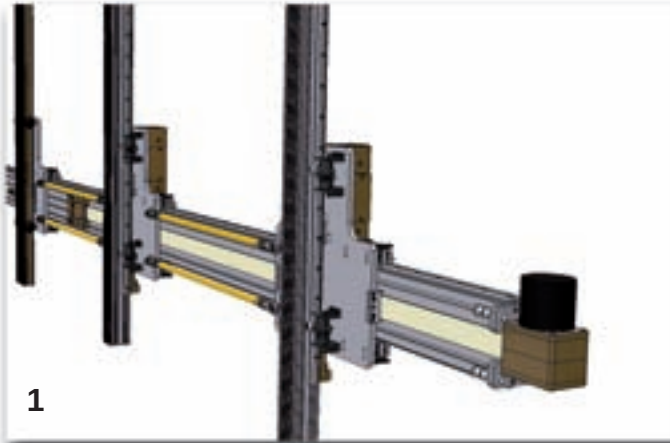

- 1 Multi-gripper handling system with belt drive
- 2 Panel handling system, construction industry
- 3 Tool handling system in the iron and steel industry
- 4 Pick and place system for storage battery production plant
- 5 Pick and place system for packaging plant
- 6 Pick and place system for breadboards
- 7 Pick and place system for production plant

Assembly positions and load direction

For rollers profiles.

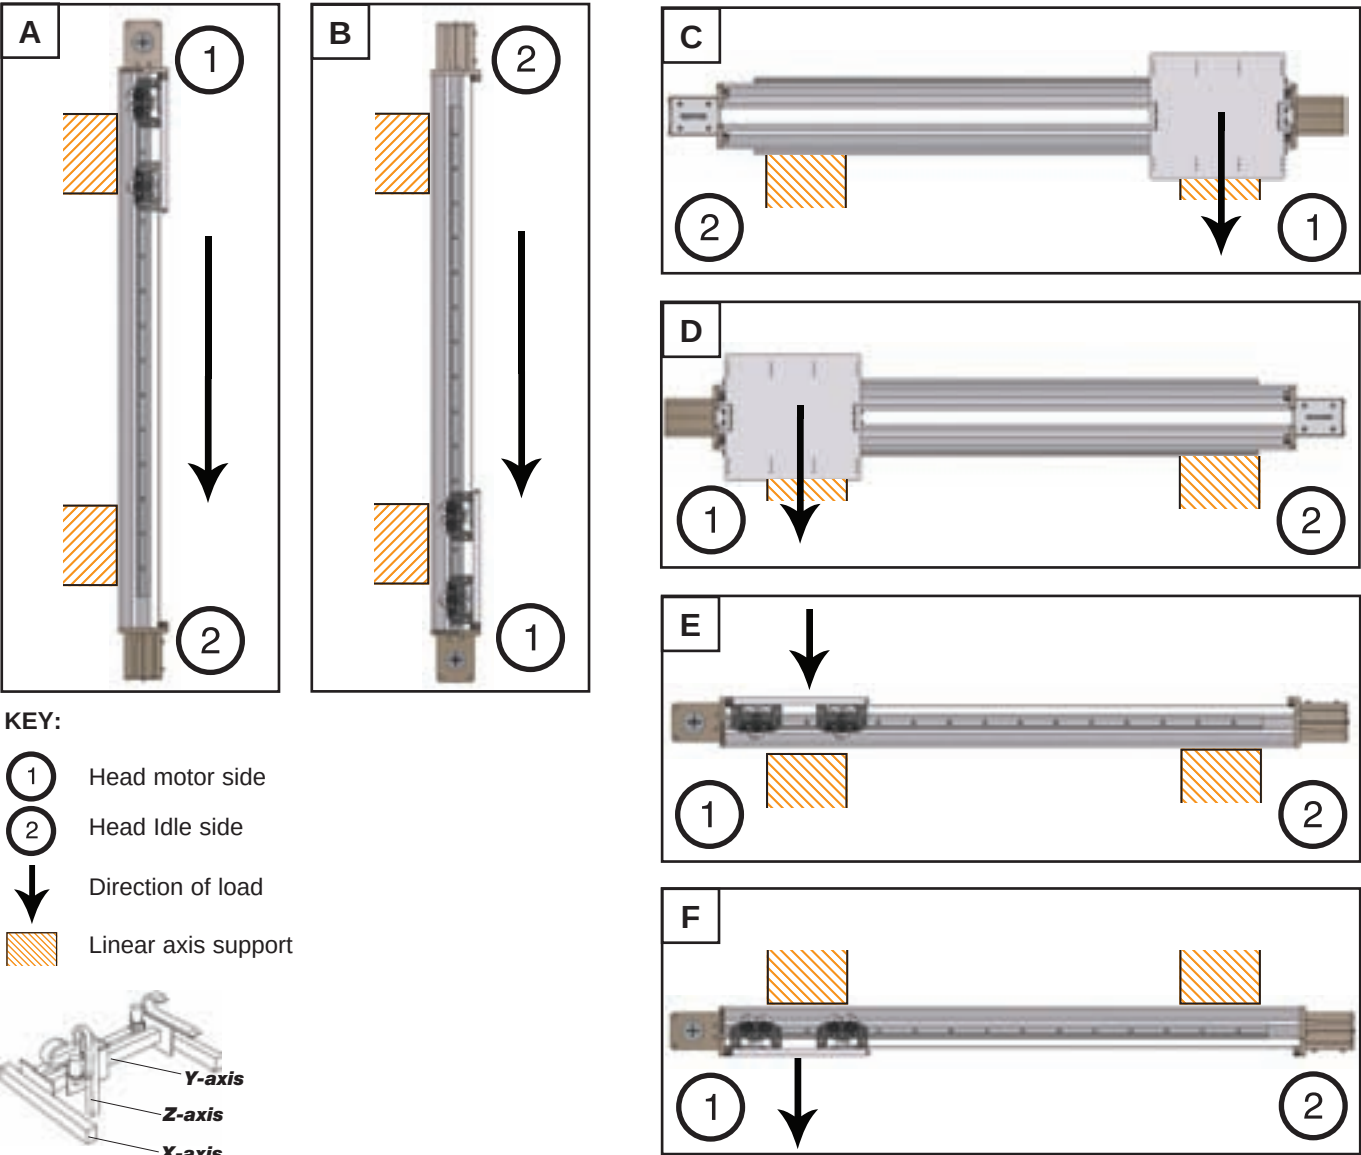

Simplified code setting of the module


EXAMPLE			T	C	S	M	280	mm/mm/	...
SERIES	K=	light							
	M=	compact closed section							
	T=	heavy							
	Z=	vertical omega belt							
HANDLING	C=	belt							
	CE=	large belt							
	V=	ball screw							
	T=	trapezoidal screw							
	N=	idle							
	L=	linear motor							
SLIDE	RR / RQ / RP = guide rails for roller sl. Ø30 / Ø40 / Ø52 o Ø62								
	S= guide rails for caged balls roller slides								
	H= guide rails for caged ball roller slides								
	G= guide rails for cylindrical shaped rollers								
	Y= guide rails for polyamide shaped rollers								
MACHINING PROFILE		M= profile with machined guide plane and rack plane							
PROFILE SIZE									
STROKE / Length		“mm” = X-axis / Y-axis / Z-axis							
ACCESSORY CODES		Various accessory codes							

Modline


M
I

- ML-11


Profile specifications

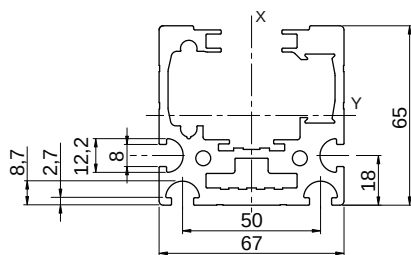


Profile	M 65x67	
Weight per metre	4.5	[kg/m]
Max. length	9	[m]
Moment of inertia I _y	683,900	[mm ⁴]
Moment of inertia I _x	796,750	[mm ⁴]
Module	MCR/L/H 65	

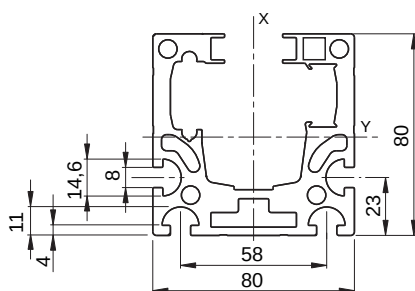


Profile	M 80x80	
Weight per metre	6.3	[kg/m]
Max. length	6	[m]
Moment of inertia I _y	1,430,000	[mm ⁴]
Moment of inertia I _x	1,780,000	[mm ⁴]
Module	MCR/S/H 80 - MVR/S/T 80	

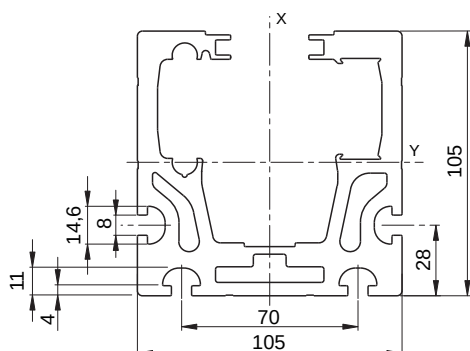


Profile	M 105x105	
Weight per metre	11	[kg/m]
Max. length	10.45	[m]
Moment of inertia I _y	4,466,000	[mm ⁴]
Moment of inertia I _x	5,660,000	[mm ⁴]
Module	MCR/S/H - MVR/S/T 105	





Profile (60x60)	F01-1	
Weight per metre	3.6	[kg/m]
Max. length	6	[m]
Moment of inertia I _y	466,600	[mm ⁴]
Moment of inertia I _x	466,600	[mm ⁴]
Module	ZCG/L 60	

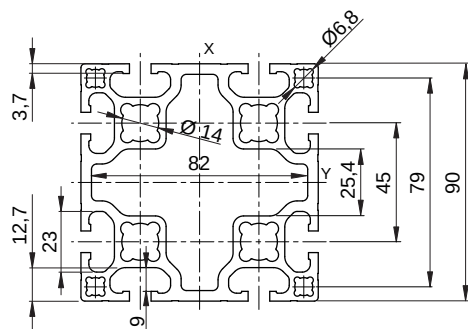


Profile (90x90)	E01-4	
Weight per metre	6	[kg/m]
Max. length	6	[m]
Moment of inertia I _y	2,027,000	[mm ⁴]
Moment of inertia I _x	2,027,000	[mm ⁴]
Module	ZCG - ZCL - ZCRR 90	

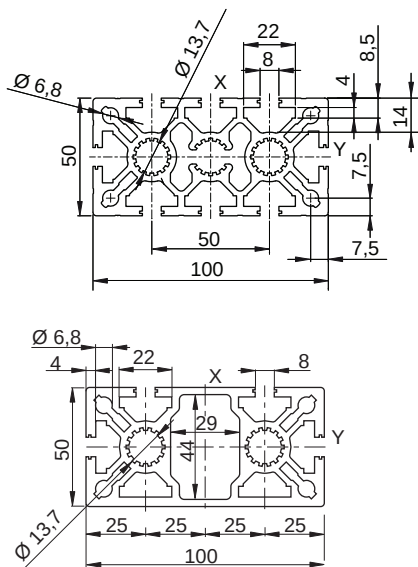



Profile (50x100)	MA 1-2	MA 1-4	
Weight per metre	5.3	5.2	[kg/m]
Max. length	6	6	[m]
Moment of inertia Iy	502,800	543,100	[mm ⁴]
Moment of inertia Ix	1,986,600	2,036,700	[mm ⁴]
Module	ZCR/L 100H	TCG/TCS/H 100	

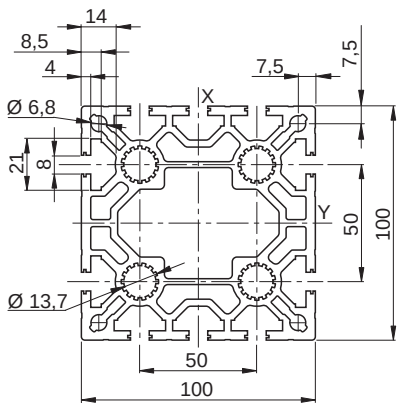


Profile (100x100)	MA 1-5	
Weight per metre	9.5	[kg/m]
Max. length	6	[m]
Moment of inertia Iy	3,650,000	[mm ⁴]
Moment of inertia Ix	3,800,000	[mm ⁴]
Module	ZCR/L 100	

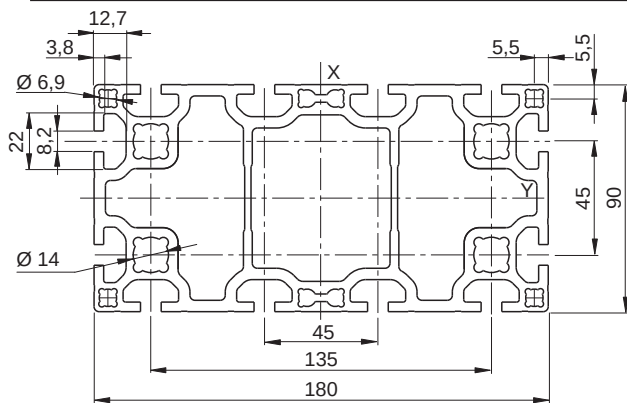


Profile (90x180)	E01-5	
Weight per metre	12.4	[kg/m]
Max. length	8	[m]
Moment of inertia Iy	4,420,000	[mm ⁴]
Moment of inertia Ix	15,180,000	[mm ⁴]
Module	TCR/G/S/H/ 180	

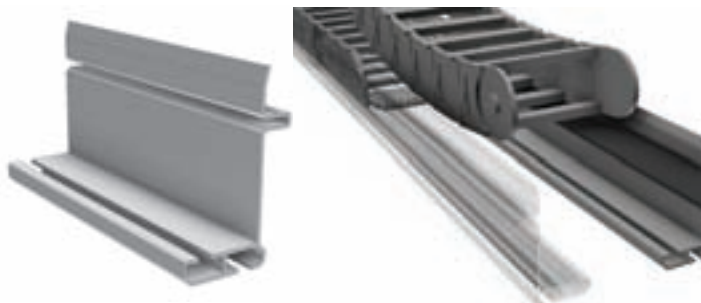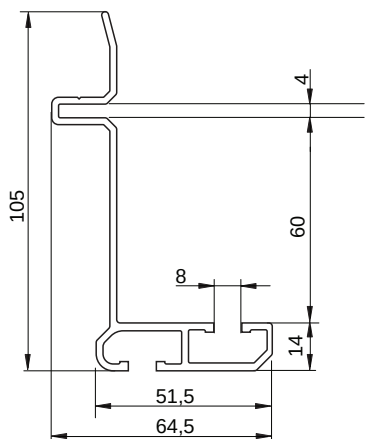


7400568 energy chain support profile		
Weight	1.5	kg/m
Available length	6	m

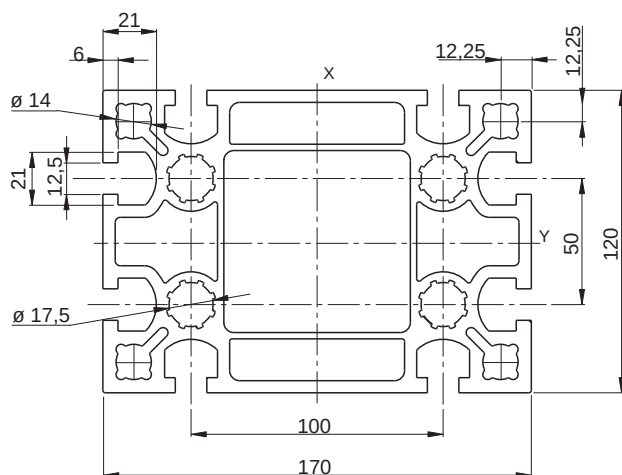
Statyca (120x170) Code 202.1753


Weight per metre	17	[kg/m]
Max. length	6	[m]
Moment of inertia Iy	10,200,000	[mm ⁴]
Moment of inertia Ix	20,360,000	[mm ⁴]
Module	TCR/S/H 170 - ZCR/L 170	

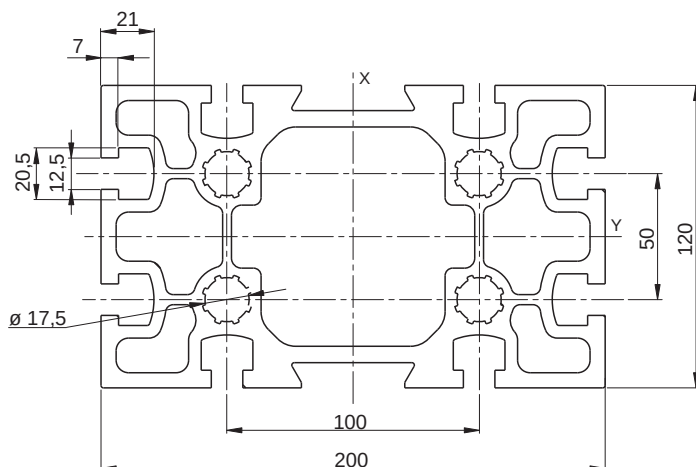
Valyda (120x200) Code 202.1146

Weight per metre	21	[kg/m]
Max. length	12	[m]
Moment of inertia Iy	12,900,000	[mm ⁴]
Moment of inertia Ix	32,900,000	[mm ⁴]
Module	TCR/S/H 200	
Anodised up to	9	[m]

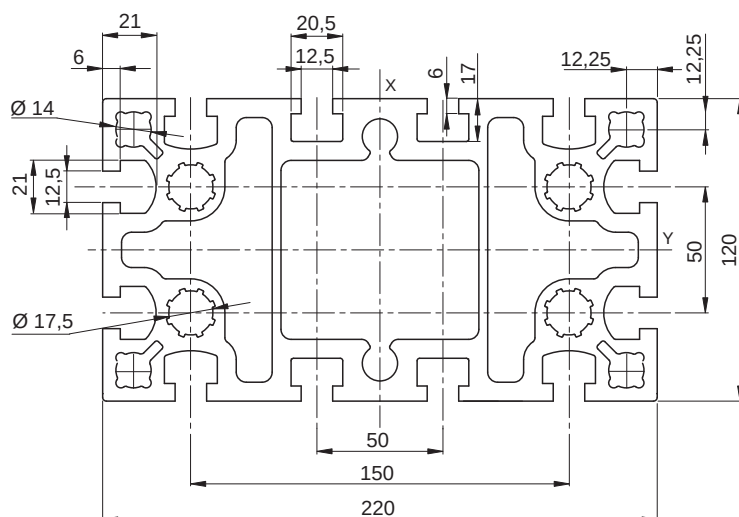

Logyca (120x220) Code 202.2184

Weight per metre	25	[kg/m]
Max. length	12	[m]
Moment of inertia Iy	15,650,000	[mm ⁴]
Moment of inertia Ix	46,550,000	[mm ⁴]
Module	TCR/S/H 220-ZCR/L/ 220	
Anodised up to	lungh. 9	[m]

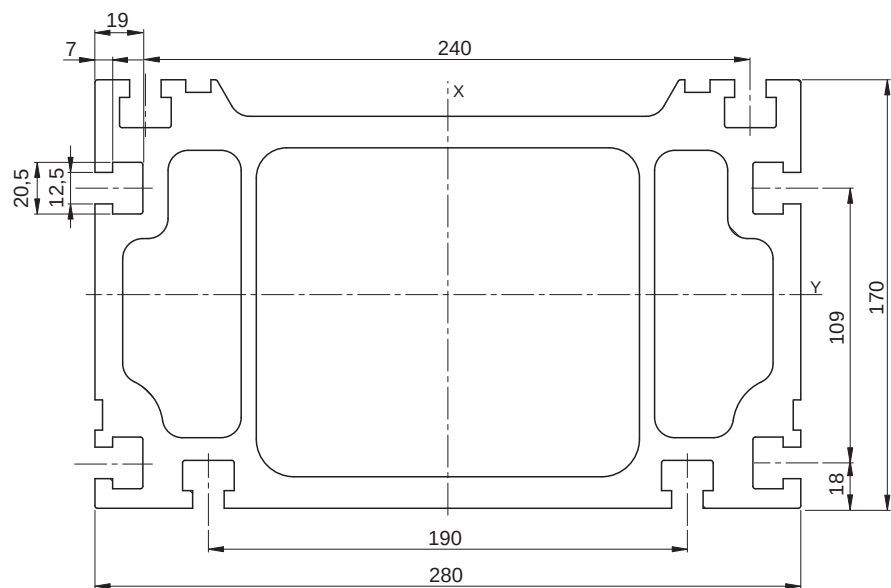


Pratyca (170x280) Code 202.1147

Weight per metre	40	[kg/m]
Max. length	12	[m]
Moment of inertia Iy	50,288,000	[mm ⁴]
Moment of inertia Ix	134,103,000	[mm ⁴]
Module	TCR/RP/S/H 280	
Usually not anodised		

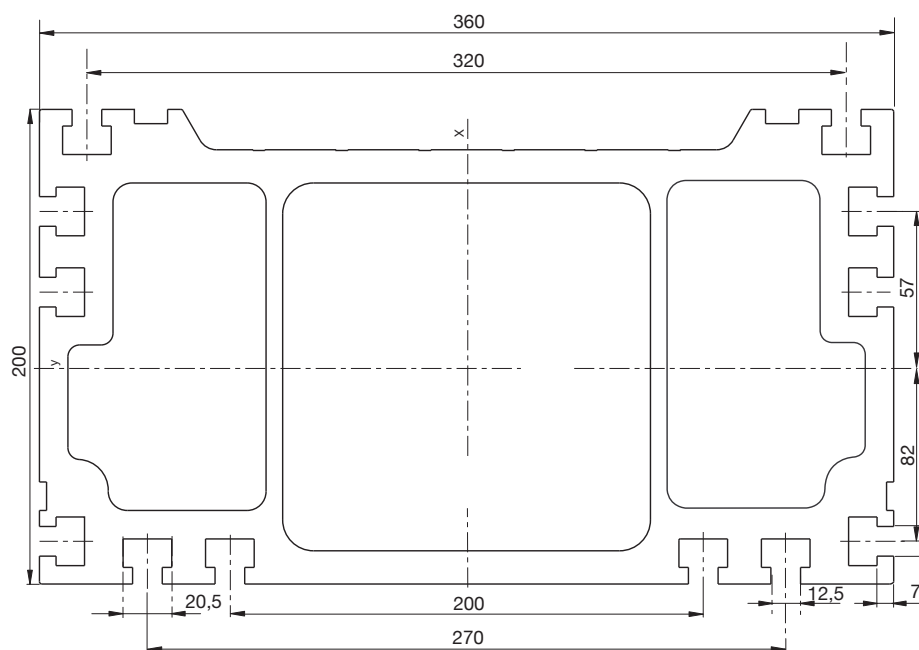

Solyda (200x360) Code 202.0342

Weight per metre	60	[kg/m]
Max. length	12	[m]
Moment of inertia Iy	318,687,000	[mm ⁴]
Moment of inertia Ix	105,533,000	[mm ⁴]
Module	TCRP/S/H 360	
Usually not anodised		

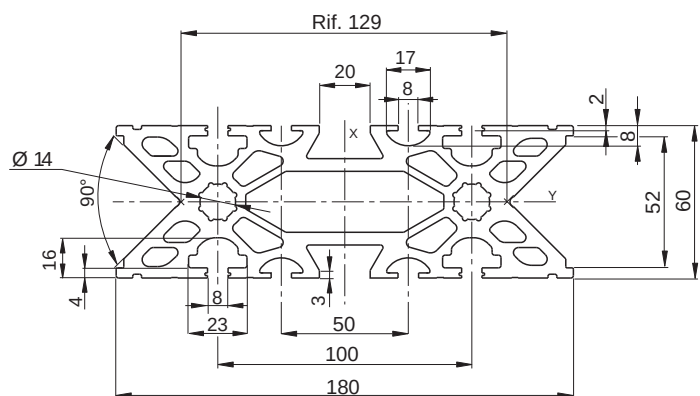


SYS 1-G Code 302.0001

Weight per metre	12	[kg/m]
Max. length	7.5	[m]
Moment of inertia Iy	1,600,000	[mm ⁴]
Moment of inertia Ix	12,350,000	[mm ⁴]
Module	ZCY180	

*Holes for M16 thread and for PVS connecting elements

Registered model

Option: lighter version with pulley seats integrated within the profile
Accessories: see page 11

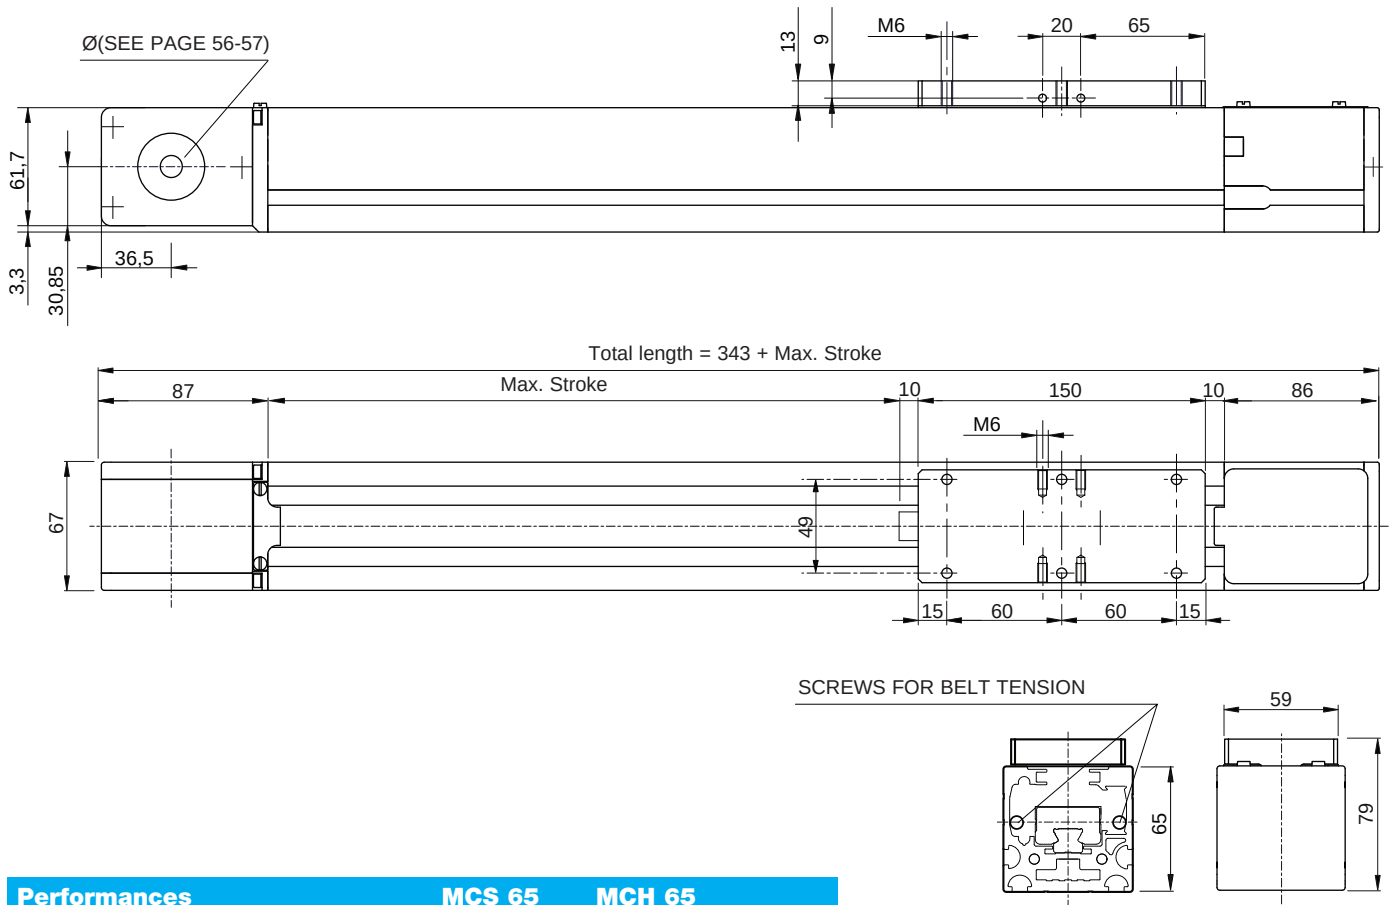


Performances	MCS 65	MCH 65	
Max. stroke	7,830	7,830	[mm]
Max. speed	5	3	[m/s]
Max. acceleration	50	30	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
No load torque	-	-	[mm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]	F _{zB} [N]
MCH 65	19	120	120	1,180	1,960	1,960	1,960
MCS 65	16	140	103	1,180	2,094	3,740	2,320

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.
In case of peak forces acting together please ask the technical dept



F_x= Max belt strength

Data	
Belt	32AT05
Slide	2 caged balls roller slides15[mm]
Load bearing profile	65x67 (see page 12)
Pulley Ø	50.93 [mm]
Lead	160 [mm/rev]

Weights	
Inertia of the pulley	- [kgm ²]
Belt weight	0.22 [kg/m]
Carriage weight	1,1 [kg]
Base module (stroke=0)	M _{base} =4.2 [kg]
1,000 mm profile	q=6.2 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

MCR 80


HARDENED GUIDE RAILS AND PROFILED ROLLERS

Registered model


Option: version with additional belt protection (see page 66)

Option: short carriage version - code C

Accessories: see page 11

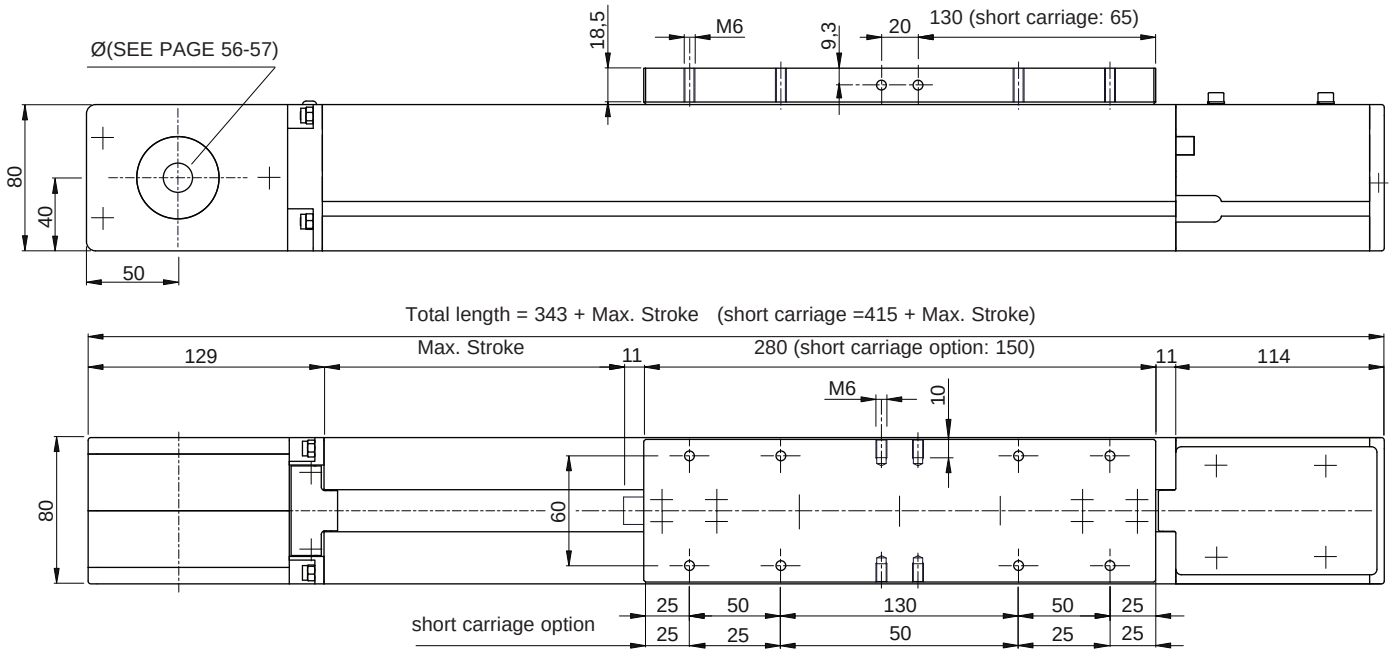

SCREWS FOR BELT TENSION

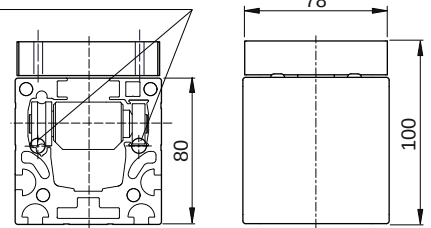

Performances	MCR 80	
Max. stroke	5,700	[mm]
Max. speed	5	[m/s]
Max. acceleration	20	[m/s ²]
Repeatability	± 0.1	[mm]
No load torque	0.7	[Nm]

Suggested working load conditions


Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCR 80	51	200	80	2,150	850	1,400

Suggested working load conditions short carriage option

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCR 80...C	51	100	40	2,150	850	1,400

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.

In case of peak forces acting together please ask the technical dept



F_x = Max belt strength

Data	
Belt	32AT10
Slide	Rollers: 4 Ø 24 - 4 Ø 22 [mm]
Load bearing profile	80x80 (see page 12)
Pulley Ø	70.03 [mm]
Lead	220 [mm/rev]

Weights		
Inertia of the pulley	0.0010	[kgm ²]
Belt weight	0.38	[kg/m]
Carriage weight	2	[kg]
Base module (stroke=0)	M _{base} =8	[kg]
1,000 mm profile	q=7	[kg]


To calculate the module weight use the following formula: $M = M_{\text{base}} + q \cdot \text{stroke}_{\text{max}} / 1,000$ (stroke_{max} in mm)

Registered model


Option: version with additional belt protection (see page 66)

Option: short carriage version - code C

Accessories: see page 11

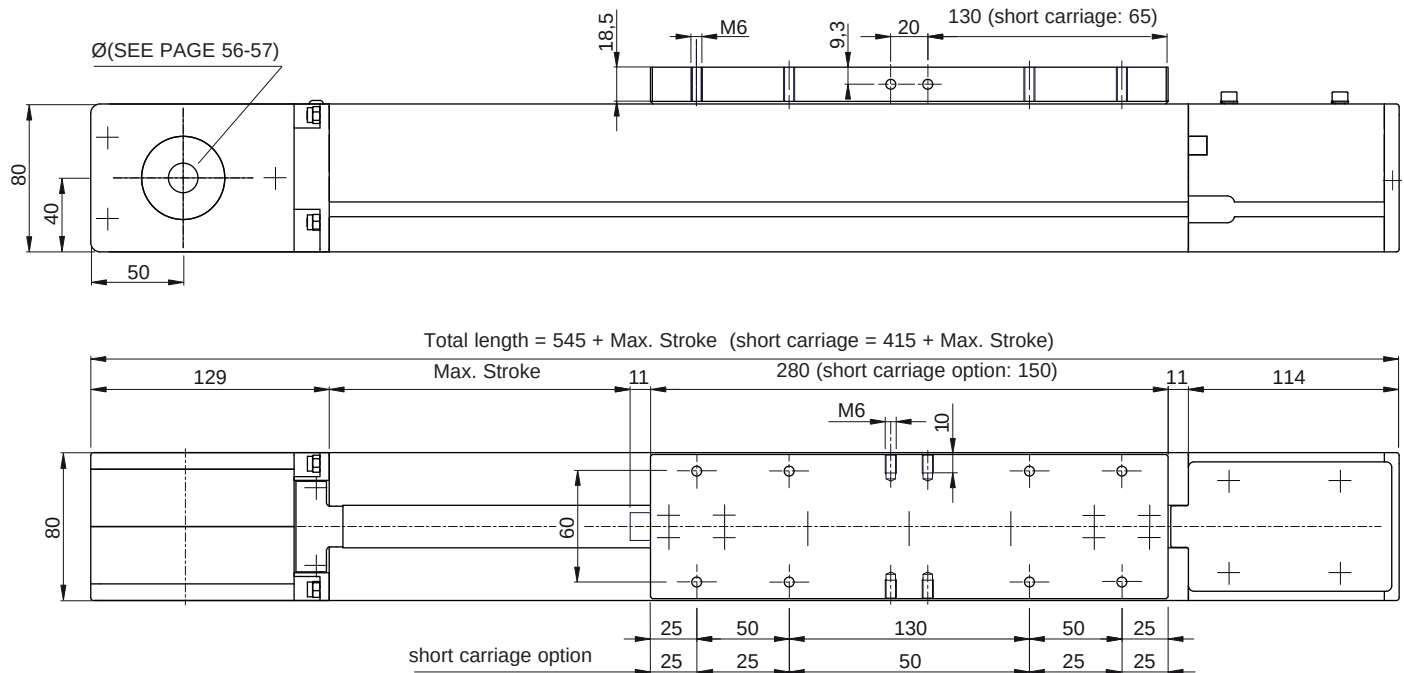

SCREWS FOR BELT TENSION

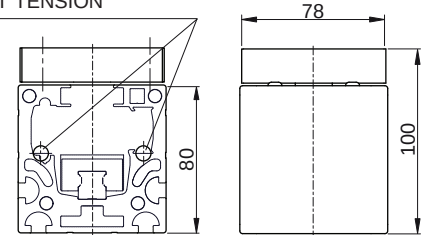

Performances	MCS 80	MCH 80	
Max. stroke	5,700	5,700	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	40	40	[m/s ²]
Repeatability	± 0,1	± 0,1	[mm]
No load torque	0.9	0.9	[Nm]


Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCS 80	52	400	400	2,150	4,200	4,200
MCH 80	30	290	290	2,150	2,900	2,900

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCS 80...C	16.5	15	15	2,150	2,100	2,100
MCH 80...C	14	15	12	2,150	1,450	1,450

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept



F_x= Max belt strength

Data	MCS80 - MCH80
Belt	32AT10
Slide	2 caged ball roller slides size 15*
Load bearing profile	80x80 (see page 12)
Pulley Ø	70.03 [mm]
Lead	220 [mm/rev]
* Short carriage option	1 pad

Weights	MCS80 - MCH80
Inertia of the pulley	0.0010 [kgm ²]
Belt weight	0.38 [kg/m]
Carriage weight	2.6 [kg]
Base module (stroke=0)	M _{base} =9 [kg]
1,000 mm profile	q=8.2 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

MCR 105


HARDENED GUIDE RAILS AND PROFILED ROLLERS

Registered model

Option: version with additional belt protection (see page 66)

*Option: short carriage version - (code C) or long carriage (code L)

Accessories: see page 11

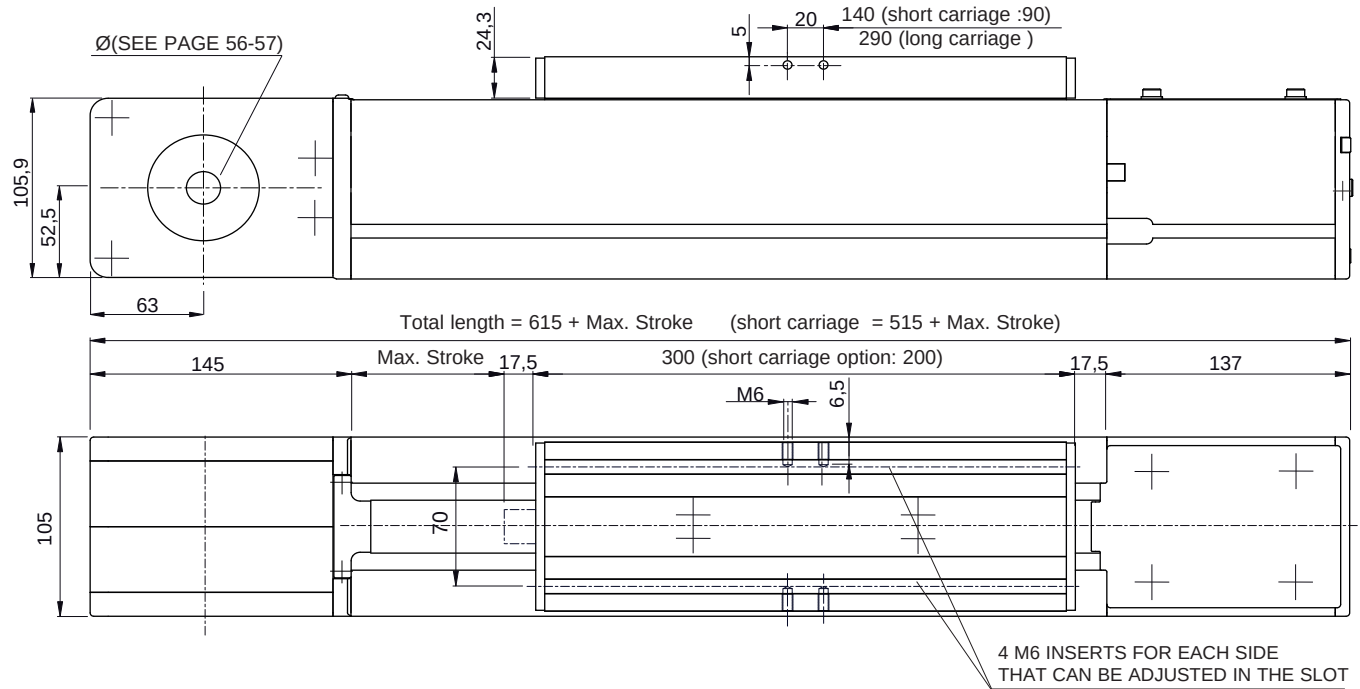

Performances	MCR 105		
Max. stroke	10,100	[mm]	
Max. speed	5	[m/s]	
Max. acceleration	20	[m/s ²]	
Repeatability	± 0.1	[mm]	
No load torque	1.2	[Nm]	

Suggested working load conditions



Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCR 105	185	580	220	3,300	1,500	2,950

Suggested working load conditions short carriage option

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCR 105...C	185	330	130	3,300	1,450	2,950

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

SCREWS FOR BELT TENSION

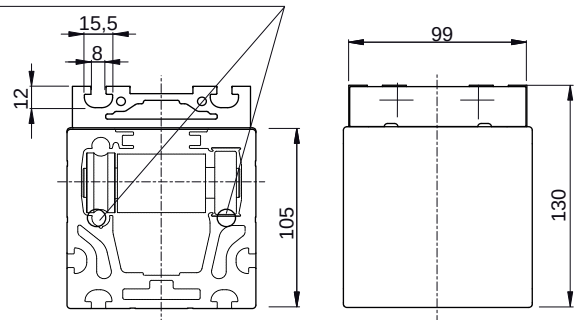

F_x = Max belt strength

Data	
Belt	40AT10
Slide	Rollers: 4 Ø 37 - 4 Ø 35 [mm]
Load bearing profile	105x105 (see page 12)
Pulley Ø	92.31 [mm]
Lead	290 [mm/rev]

Weights		
Inertia of the pulley	0.0037	[kgm ²]
Belt weight	0.47	[kg/m]
Carriage weight	3.5	[kg]
Base module (stroke=0)	M _{base} =16.5	[kg]
1,000 mm profile	q=13	[kg]


To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

Registered model


Option: version with additional belt protection (see page 66)

*Option: short carriage version - (code C)

Accessories: see page 11

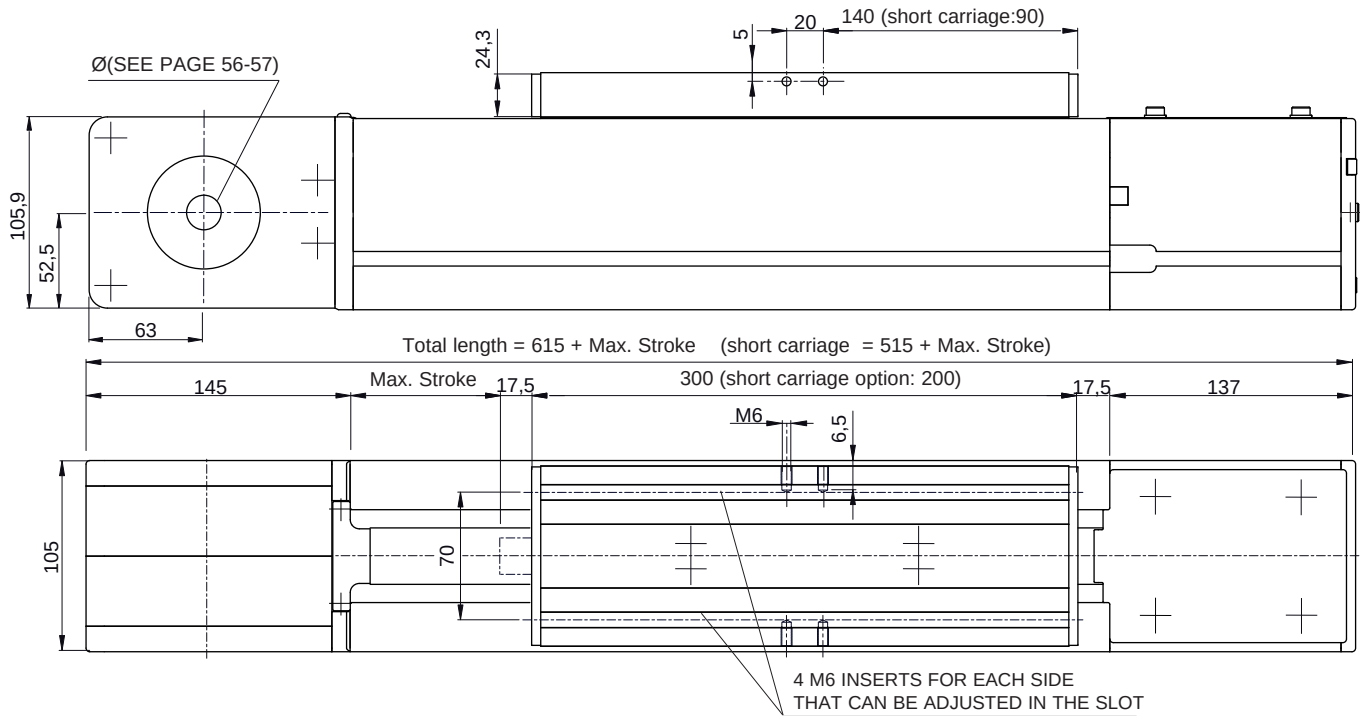

SCREWS FOR BELT TENSION

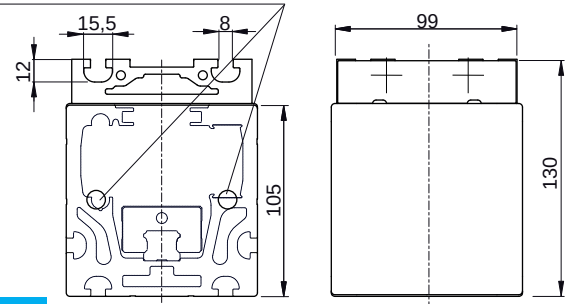


Performances	MCS 105	MCH 105	
Max. stroke	10,100	10,100	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
No load torque	1.5	1.5	[Nm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCS 105	156	800	800	3,300	9,550	9,550
MCH 105	116	600	600	3,300	6,030	6,030

Suggested working load conditions short carriage option

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCS 105...C	51	52	52	3,300	4,777	4,777
MCH 105...C	36	30	30	3,300	3,018	3,018



F_x = Max belt strength

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Constuctive data


Belt	40AT10
Slide	2 caged ball roller slides size 20*
Load bearing profile	105x105 (see page 12)
Pulley Ø	92.31 [mm]
Lead	290 [mm/rev]

* Short carriage option 1 pad

Weights

Inertia of the pulley	0.0037 [kgm ²]
Belt weight	0.47 [kg/m]
Carriage weight	4.5 [kg]
Base module (stroke=0)	M _{base} =18 [kg]
1,000 mm profile	q=14.3 [kg]



To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

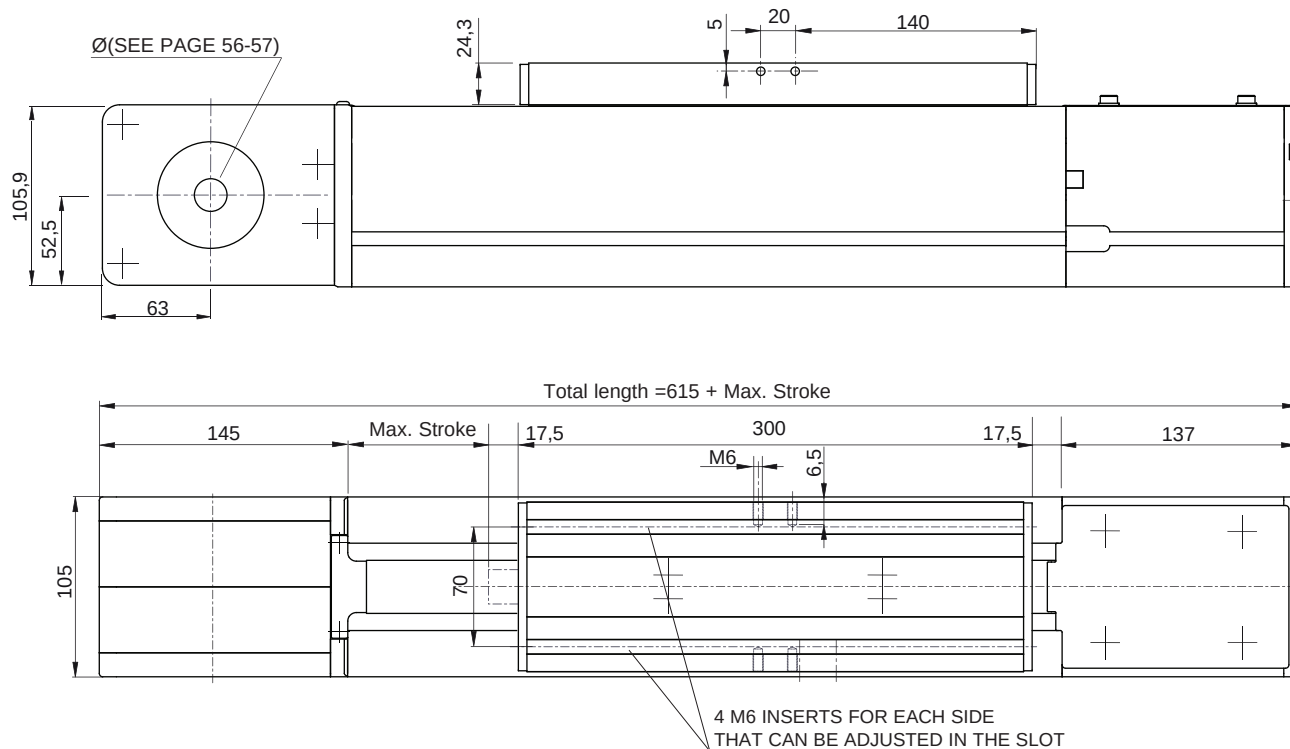

Performances	MCHH 105	
Max. stroke	7,400	[mm]
Max. speed	5	[m/s]
Max. acceleration	50	[m/s ²]
Repeatability	± 0.1	[mm]
No load torque	2.2	[Nm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MCHH 105	210	1.033	700	3,300	7,200	6,210

SCREWS FOR BELT TENSION

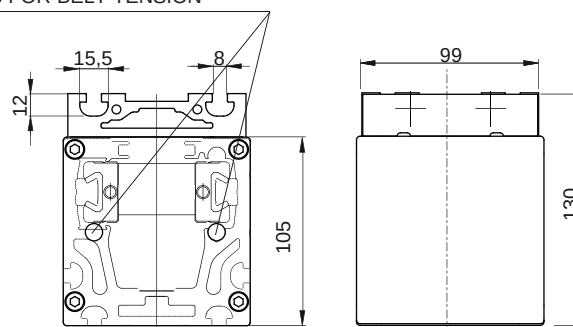

F_x= Max belt strength


The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Data	
Belt	40ATL10
Slide	4 caged ball roller slides size 15
Load bearing profile	105x105 (see page 12)
Pulley Ø	92.31 [mm]
Lead	290 [mm/rev]

Weights	
Inertia of the pulley	0.0037 [kgm ²]
Belt weight	0.47 [kg/m]
Carriage weight	4.5 [kg]
Base module (stroke=0)	M _{base} =18 [kg]
1,000 mm di profile	q=14 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

MVR 80 - MTR 80

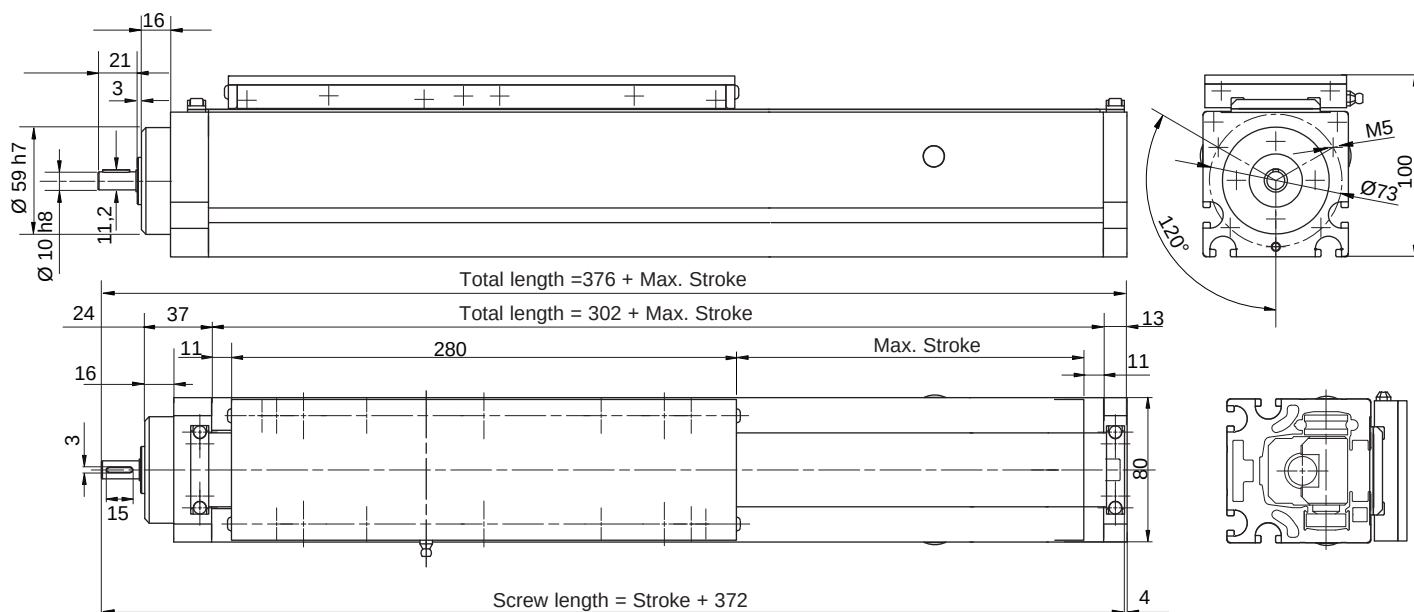HARDENED GUIDES
WITH CYLINDRICAL ROLLERS - TRAPEZOIDAL BALL SCREW


Code	M	T	R				
V = Ball screw							
T = Trapezoidal screw							
R = Rollers							
Max. Stroke				[mm]			
Module total length				[mm]			
Type of carriage				N/D			
Screw pitch				5-10			
Pedestal bearings							SI

Performances	MVR 80	MTR 80
Max. stroke	2,500 [mm]	3,000 [mm]
Pitch 5	0.15 [m/s]	Pitch 4 0.10 [m/s]
Pitch 10	0.30 [m/s]	Pitch 8 0.20 [m/s]
Pitch 16	0.50 [m/s]	
Max. acceleration	5 [m/s ²]	2 [m/s ²]
Repeatability	± 0,05 [mm]	± 0,20 [mm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MVR 80	51	200	80	*1,600	850	1,400
MTR 80	51	200	80	*2,000	850	1,400

The values shown refer to maximum performance with each force acting individually. The dynamic data shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.

(*) With a pitch of 5 mm


Data	
Slide	Rollers: 4 Ø24 - 4 Ø22 [mm]
Beam	80x80 (see page 12)
Ø screw	16 [mm]
Length of the screw	367+ _{max} stroke [mm]

Weights


Inertia of the worm	0.0003 • L. screw(m) [kgm ²]
Carriage weight	2.5 c.a. [kg]
Base module (stroke=0)	M _{base} = 5.5 approx. [kg]
1,000 mm profile	q=8 approx. [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

Critical Speed Graph




Max. stroke-speed limit over which some support bearings are required (SI) to avoid an excessive screw vibration. The working point marked inside the broken line is not recommended.



F_x= Max belt strength

Registered model

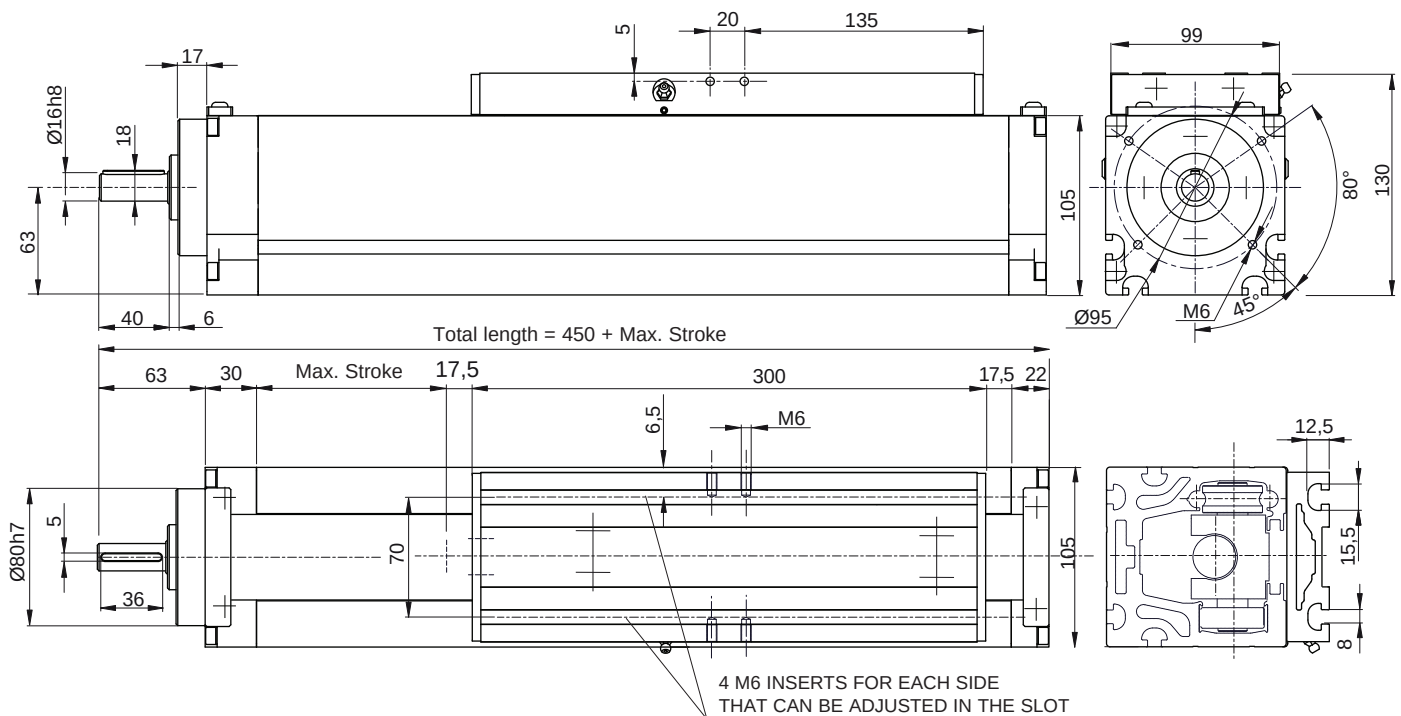

Code	M	T	R				
V = Ball screw							
T = Trapezoidal screw							
R = Rollers							
Max. stroke							
Module total length							
Type of carriage						N/D	
Screw pitch						5-10-25-50	
Pedestal bearings							SI

Performances		MVR 105		MTR 105	
Max. stroke	Pitch 5 - 10 = 4550	Pitch 25 = 5,150			[mm]
Max. speed	Pitch 5	[mm]	0.15	0.075	[m/s]
	Pitch 10	[mm]	0.30	0.15	[m/s]
	Pitch 25	[mm]	0.75	0.37	[m/s]
Max. acceleration		5	2		[m/s ²]
Repeatability		± 0.05	± 0.2		[mm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MVR 105	185	580	220	*2,000	1,500	2,950
MTR 105	185	580	220	*3,000	1,500	2,950

The values shown refer to maximum performance with each force acting individually. The dynamic data shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.


(*) With a pitch of 5 mm

Data	
Slide	Rollers: 4 Ø 37 - 4 Ø 35 [mm]
Beam	105x105 (see page 12)
Ø screw	25 [mm]
Length of the screw	440+ _{max} stroke [mm]


Weights	
Inertia of the worm	0.0003 • L. screw(m) [kgm ²]
Carriage weight	4 approx. [kg]
Base module (stroke=0)	M _{base} =11 [kg]
1,000 mm profile	q=17.2 approx. [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)


Critical Speed Graph

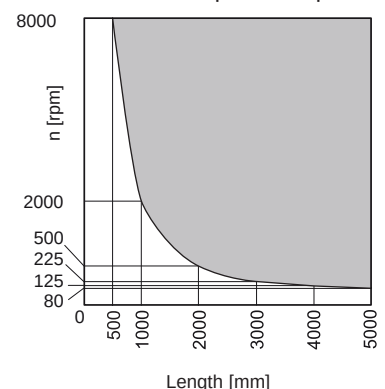

Max. stroke-speed limit over which some support bearings are required (SI) to avoid an excessive screw vibration. The working point marked inside the broken line is not recommended.




F_x = Max belt strength

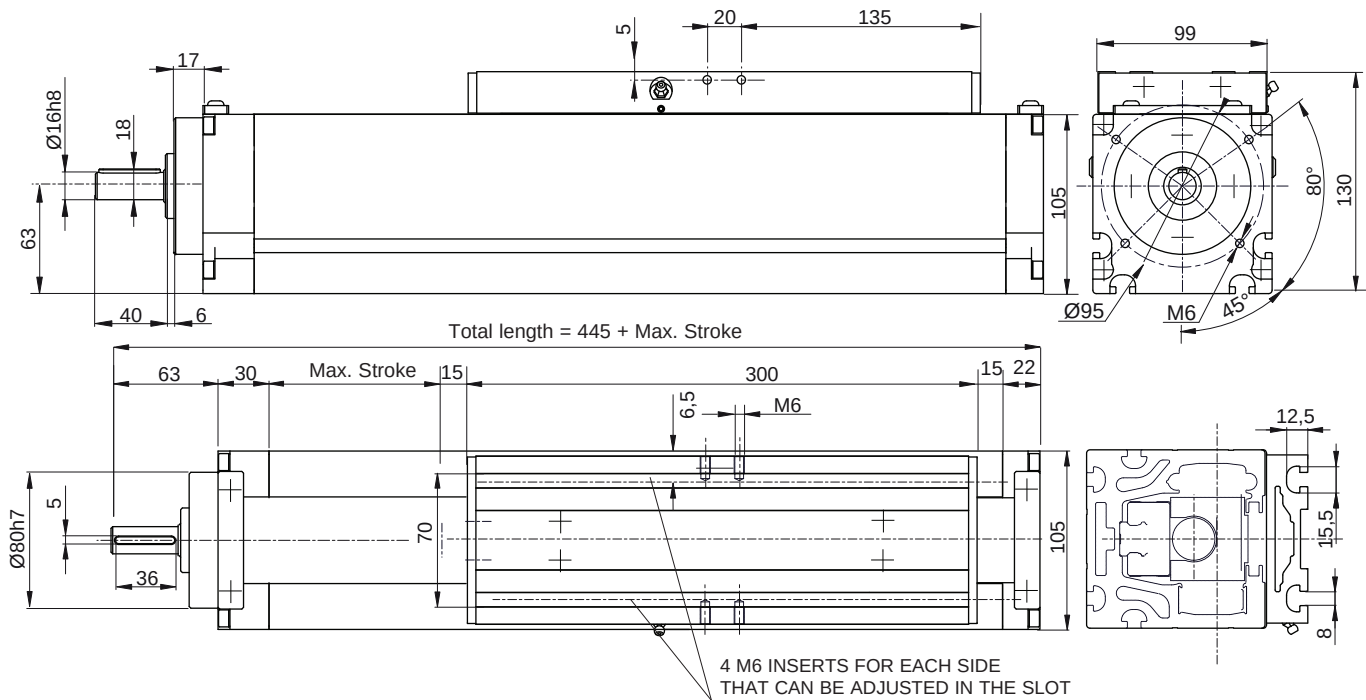

Code	M	V	L				
V = Ball screw							
S = Caged ball roller slides							
H = Ball roller slides							
Max. stroke				[mm]			
Module total length					[mm]		
Type of carriage						N/D	
Screw pitch						5-10-25-50	
Pedestal bearings							SI

Critical Speed Graph

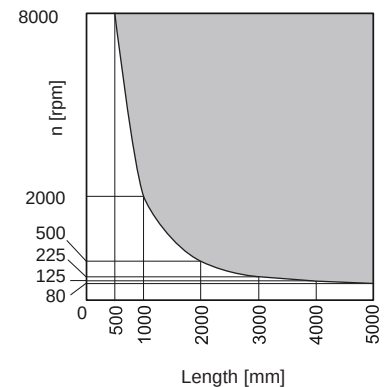

Max. stroke-speed limit over which some support bearings are required (SI) to avoid an excessive screw vibration. The working point marked inside the broken line is not recommended.

Performances	MVS 105	MVH 105	
Max. stroke	Pitch 5 -10 = 4,550	Pitch 25 = 5,150	[mm]
Max. speed	Pitch 5 [mm]	0.15 [m/s]	
	Pitch 10 [mm]	0.30 [m/s]	
	Pitch 25 [mm]	0.75 [m/s]	
Max. acceleration	5	5	[m/s ²]
Repeatability	± 0.05	± 0.05	[mm]

Suggested working load conditions


Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
MVS 105	156	800	800	3,000(*)	9,550	9,550
MVH 105	116	600	600	3,000(*)	6,030	6,030

The values shown refer to maximum performance with each force acting individually. The dynamic data shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.

(*) With a pitch of 5 mm

Data	
Slide	2 caged ball roller slides size 20
Beam	105x105 (see page 12)
Ø screw	25 [mm]
Length of the screw	440+ _{max} stroke [mm]

Weights	
Inertia of the worm	0.0003 • L. screw(m) [kgm ²]
Carriage weight	4 approx. [kg]
Base module (stroke=0)	M _{base} =12 [kg]
1,000 mm profile	q=17.2 approx. [kg]




F_x= Max belt strength

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

MVHH 105

Registered model

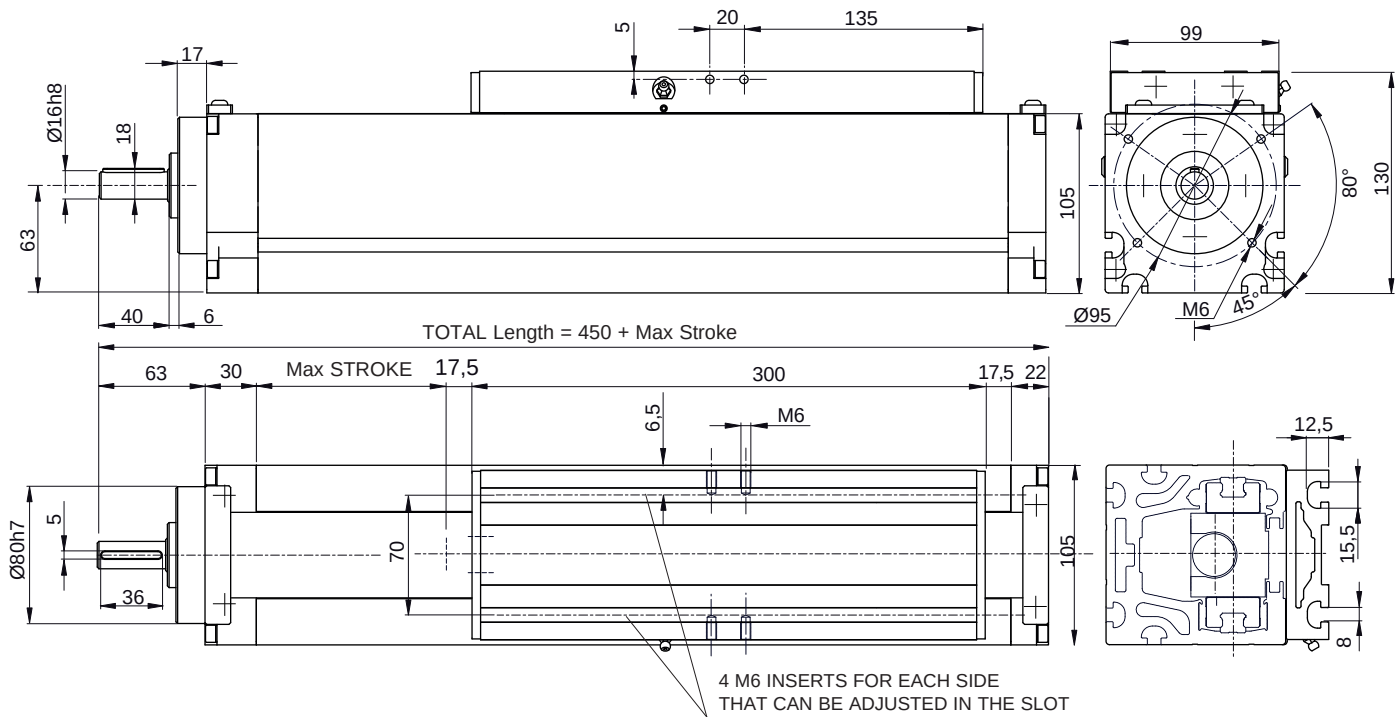

Code	M	V	HH					
V=ball screw								
H=ball roller slides								
Max Stroke								
Module total length								
Type of carriage								
Screw pitch								
Pedestal bearings								

Performances				MVHH 105	
Max Stroke	Pitch	5 -10 = 4550	Pitch	25 = 5150	[mm]
Max Speed	Pitch	5			0,15 [m/s]
	Pitch	10			0,30 [m/s]
	Pitch	25			0,75 [m/s]
Max acceleration					5 [m/s ²]
Repeatability					± 0,05 [mm]

Suggested working load conditions

Module	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
MVHH 105	185	500	500	*3.000	6.000	6.000


The values shown refer to maximum performance with each force acting individually. The dynamic data shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.

(*) With a pitch of 5 mm


Data		
Slide	4 caged ball roller slides size 15	
Beam	105x105 (see page 12)	
Ø screw	25	[mm]
Length of the screw	440+stroke _{max}	[mm]

Weights

Inertia of the worm	0,0003 • L. screw(m) [kgm ²]
Carriage weight	4 c.a. [kg]
Base module (stroke=0)	M _{base} =13 [kg]
1,000 mm profile	q=17,5 approx. [kg]


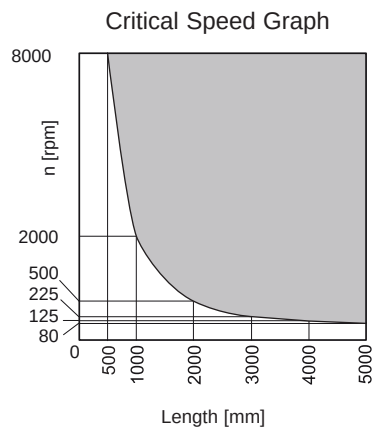


Max. stroke-speed limit over which some support bearings are required (SI) to avoid an excessive screw vibration. The working point marked inside the broken line is not recommended.




F_x = Max belt strength


To calculate the module weight use the following formula: $M = M_{base} + q \cdot stroke_{max} / 1,000$ (stroke_{max} in mm)

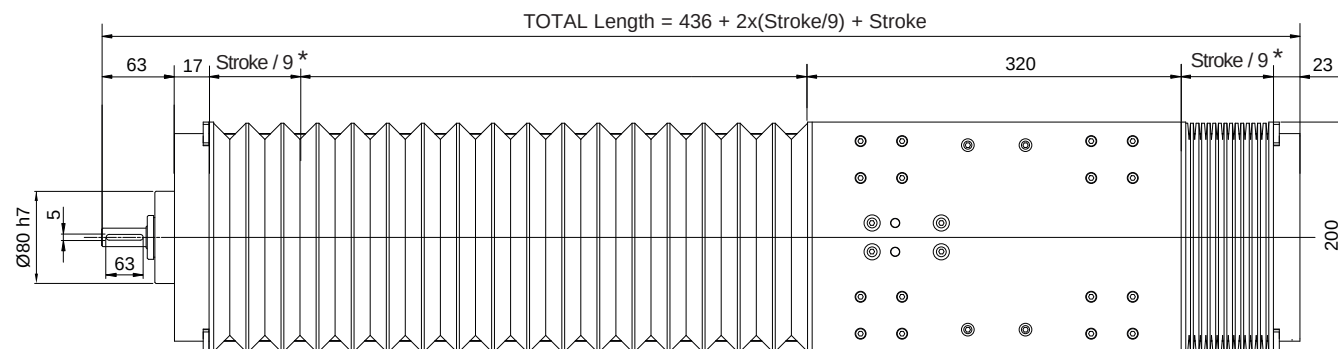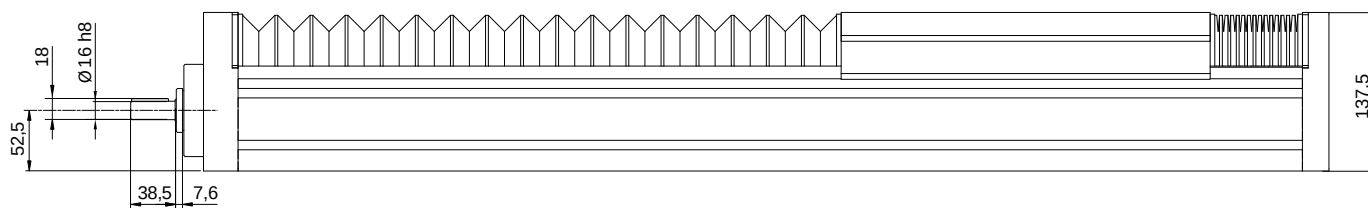

*valore indicativo

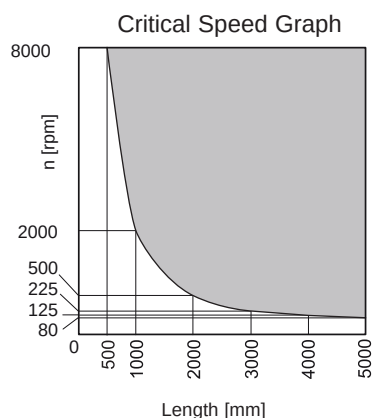

Max. stroke-speed limit over which some support bearings are required (SI) to avoid an excessive screw vibration. The working point marked inside the broken line is not recommended.

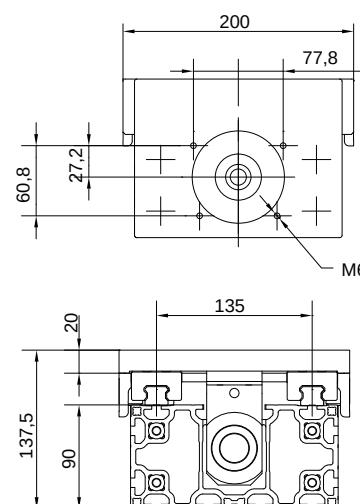

Performances		TVH 180			
Max Stroke	Pitch 5 -10 = 4550	Pitch 25 = 5150	[mm]		
Max Speed	Pitch 5	[mm]	0,15	[m/s]	
	Pitch 10	[mm]	0,30	[m/s]	
	Pitch 25	[mm]	0,75	[m/s]	

Suggested working load conditions


Module	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
TVH 180	600	850	850	*3.000	9.200	9.200

The values shown refer to maximum performance with each force acting individually. The dynamic data shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.

(*) With a pitch of 5 mm


Data	
Slide	4 caged ball roller slides size 20
Beam	E01-5 (see page 13)
Ø screw	25 [mm]
Bellow	heat-sealed, plastic

Weights	
Inertia of the worm	$0,0003 \cdot L \cdot \text{screw}(m)$ [kgm ²]
Carriage weight	7 [kg]
Base module (stroke=0)	$M_{\text{base}} = 20$ [kg]
1,000 mm profile	$q = 20$ [kg]




F_x = Max belt strength

To calculate the module weight use the following formula: $M = M_{\text{base}} + q \cdot \text{stroke}_{\text{max}} / 1,000$ (stroke_{max} in mm)

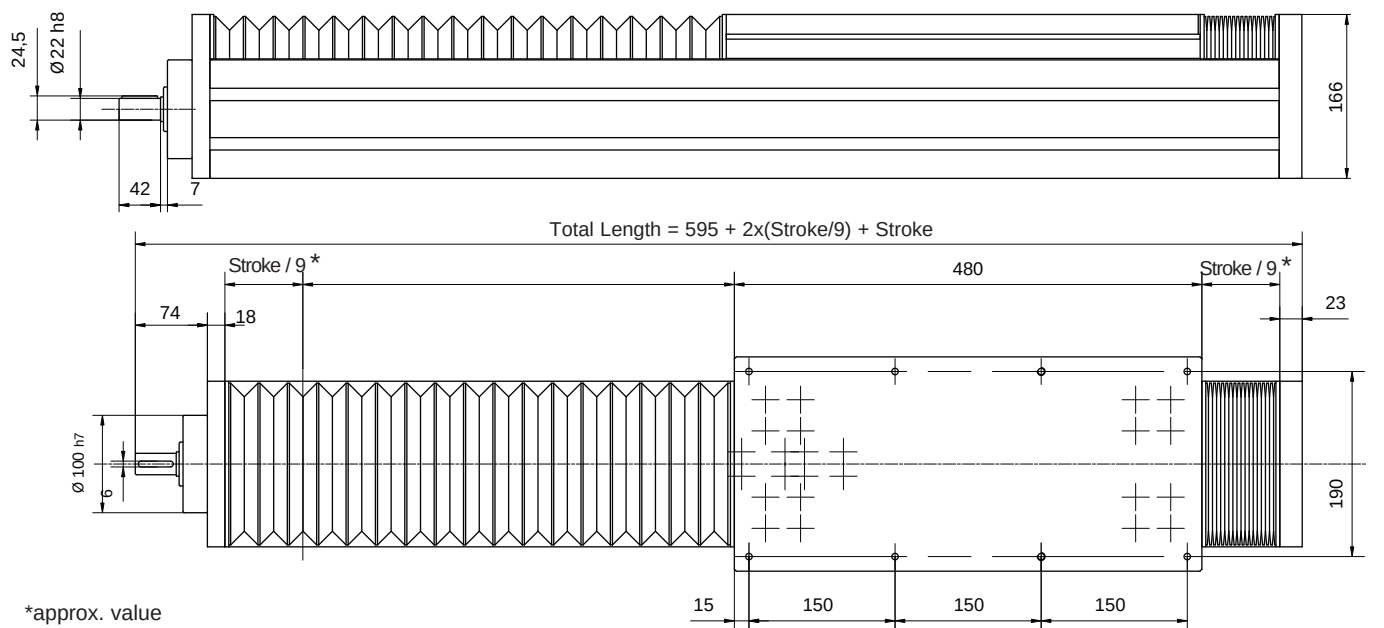

*approx. value

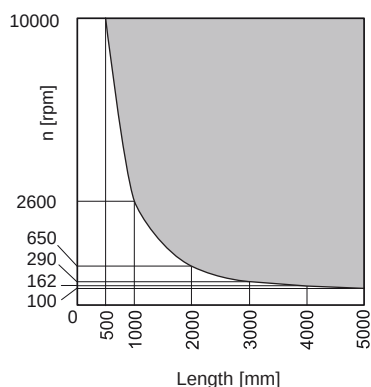

Max. stroke-speed limit over which some support bearings are required (SI) to avoid an excessive screw vibration. The working point marked inside the broken line is not recommended.

Performances		TVS 170	
Max. stroke		4,000	[mm]
Max. speed	Pitch 5	[mm]	0.15 [m/s]
	Pitch 10	[mm]	0.30 [m/s]
	Pitch 20	[mm]	0.75 [m/s]
	Pitch 32	[mm]	1.00 [m/s]

Suggested working load conditions						
Module	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
TVS 170	720	2,050	2,050	*6,000	11,950	11,950


The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept.

(*) With a pitch of 10 mm


Data	
Slide	4 caged ball roller slides size 20
Beam	Statyca (see page 14)
Ø screw	32 [mm]
Bellow	heat-sealed, plastic

Weights	
Inertia of the worm	$0,0006 \cdot L \cdot \text{screw}(m)$ [kgm ²]
Carriage weight	11 [kg]
Base module (stroke=0)	$M_{\text{base}} = 36$ [kg]
1,000 mm profile	$q = 28$ [kg]


To calculate the module weight use the following formula: $M = M_{\text{base}} + q \cdot \text{stroke}_{\text{max}} / 1,000$ (stroke_{max} in mm)




Fx= Max belt strength

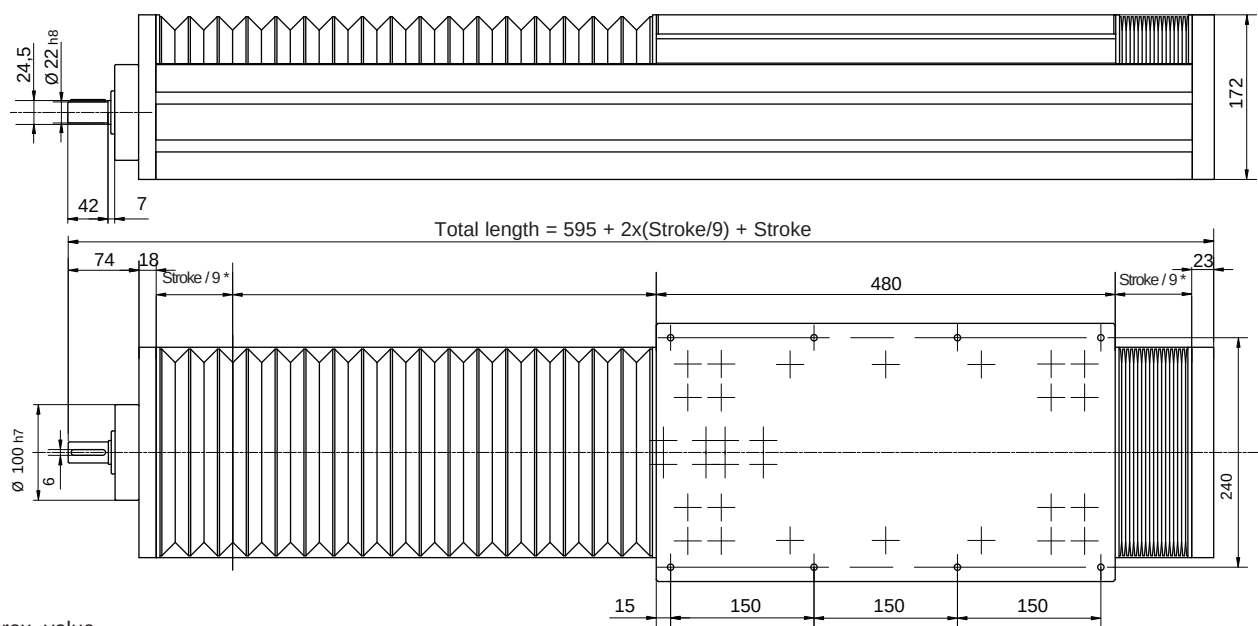

*approx. value

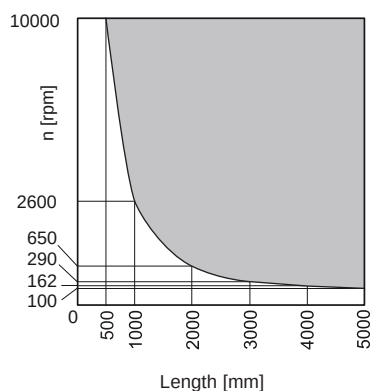

Max. stroke-speed limit over which some support bearings are required (SI) to avoid an excessive screw vibration. The working point marked inside the broken line is not recommended.

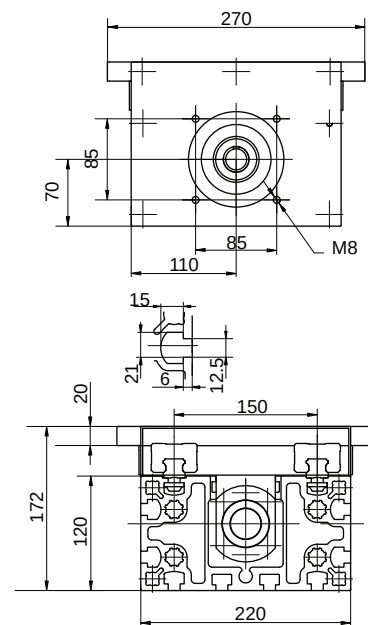


Performances		TVS 220	
Max. stroke		4,000	[mm]
Max. speed	Pitch 5 [mm]	0.15	[m/s]
	Pitch 10 [mm]	0.30	[m/s]
	Pitch 20 [mm]	0.75	[m/s]
	Pitch 32 [mm]	1.00	[m/s]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TVS 220	1,300	3,200	3,200	*6,000	18,300	18,300

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept.

(*) With a pitch of 10 mm



F_x = Max belt strength

Data	
Slide	4 caged ball roller slides size 25
Beam	Logyca (see page 14)
Ø screw	32 [mm]
Bellow	heat-sealed, plastic

Weights	
Inertia of the worm	0.0006 • L. screw(m) [kgm ²]
Carriage weight	13 [kg]
Base module (stroke=0)	M _{base} = 44 [kg]
1,000 mm profile	q = 37 [kg]




To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

Series T modules with belt drive

TCG 100

HARDENED GUIDE RAILS AND CYLINDRICAL SHAPED ROLLERS

Registered model

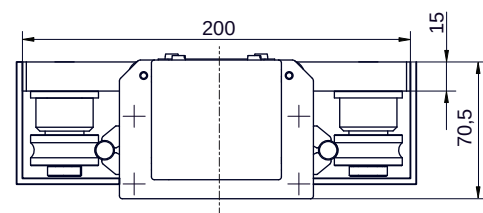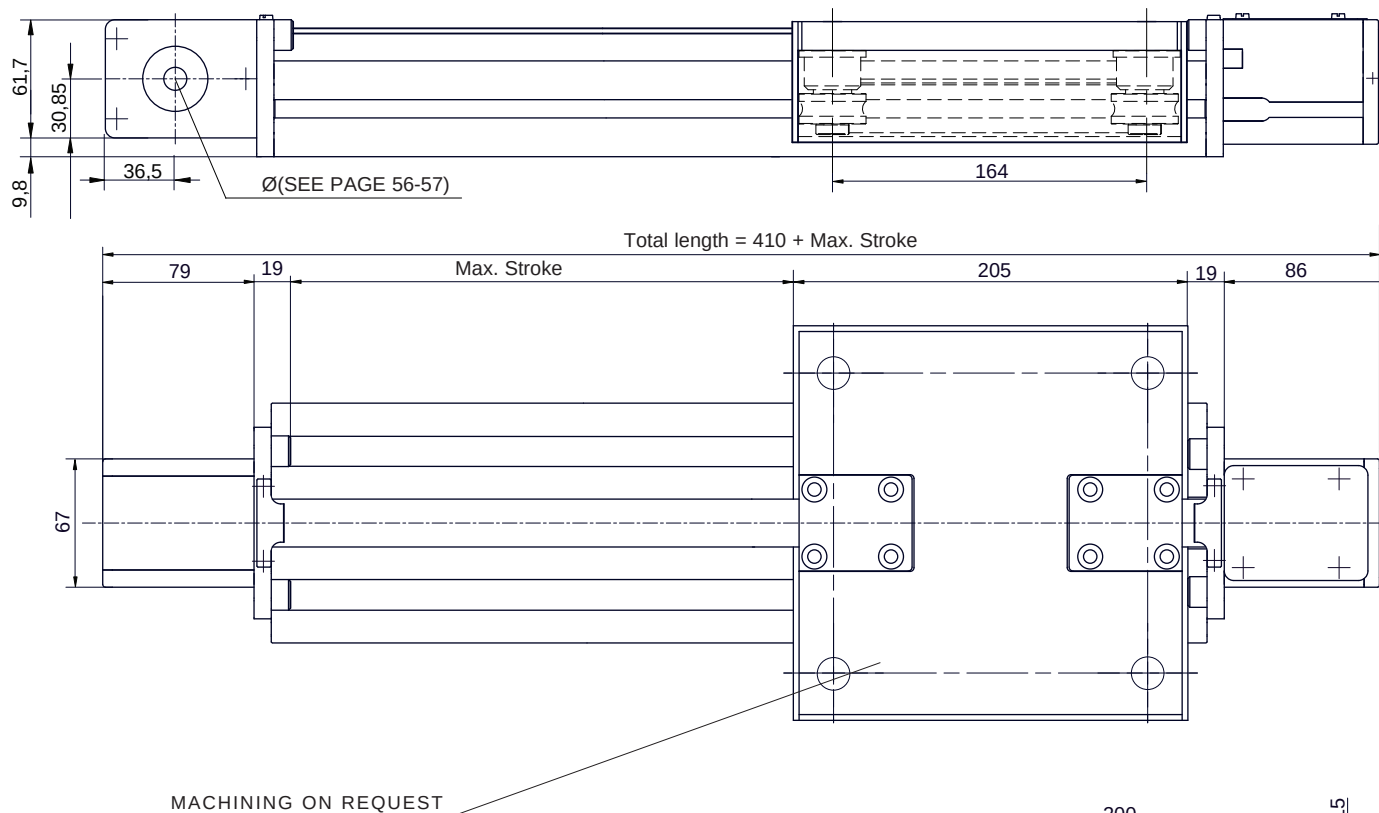

Fx= Max belt strength

Performances

TCG 100

Max. stroke	5,490	[mm]
Max. speed	5	[m/s]
Max. acceleration	20	[m/s ²]
Repeatability	± 0.1*	[mm]
Loadless torque	2	[Nm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCG 100	40	120	200	1,100	1,700	1,200

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10


Data

Belt	32AT5
Slide	4 shaped rollers Ø35[mm]
Load bearing profile	MA 1-4 (see page 13)
Pulley Ø	50.93 [mm]
Linear displacement per revolution	160 [mm]

Weights


Inertia of the pulley	-	[kgm ²]
Belt weight	0.21	[kg/m]
Carriage weight	2.5	[kg]
Base module (stroke=0)	M _{base} =6.4	[kg]
1,000 mm profile	q=8.3	[kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

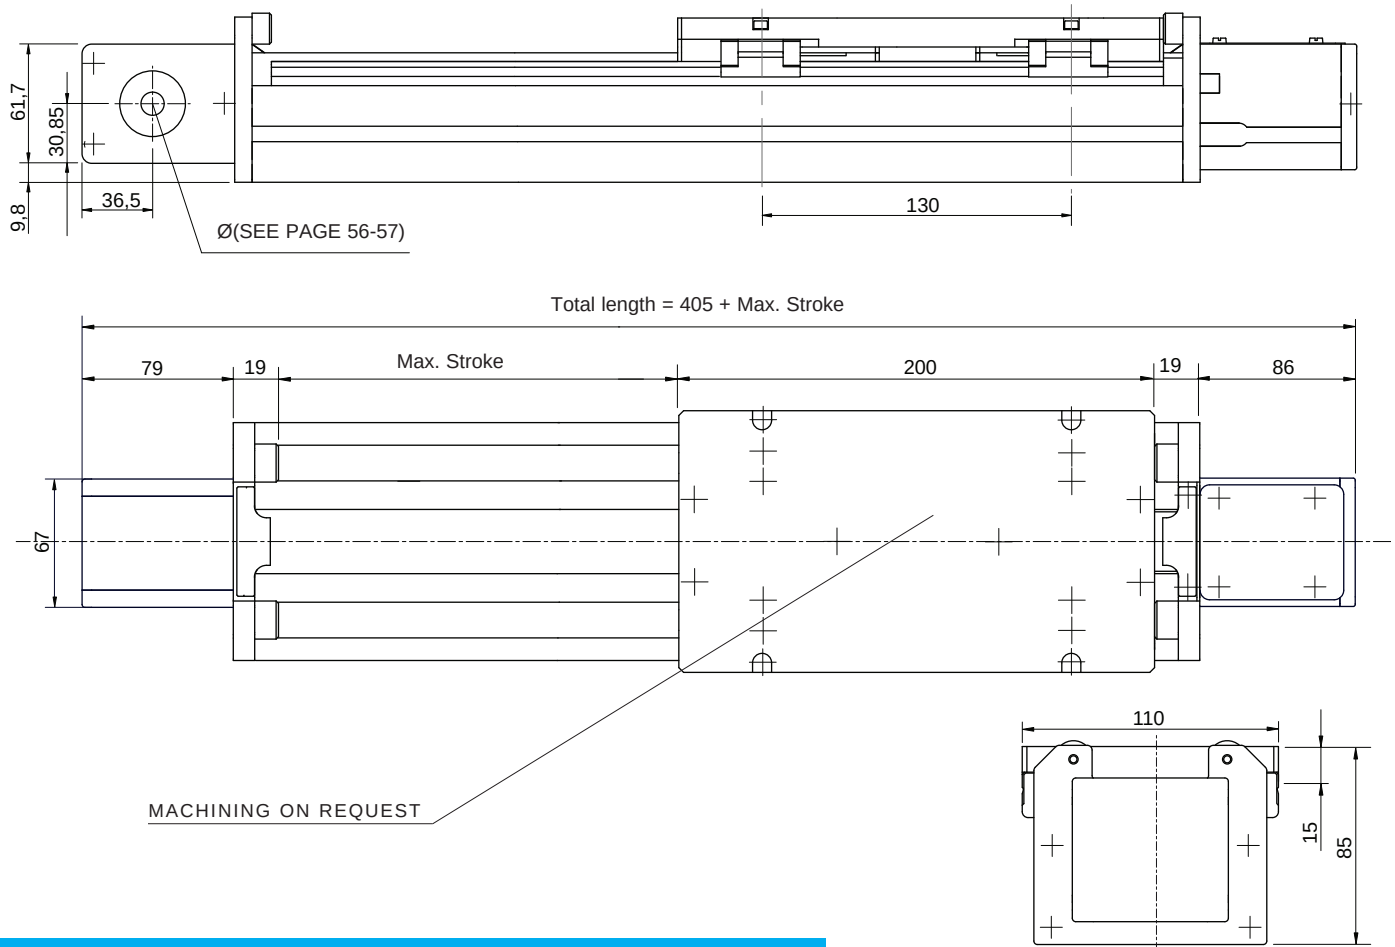

Performances	TCH 100	TCS 100	
Max. stroke	5,400	5,400	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	-	-	[Nm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCH 100	138	324	324	1,180	4,100	4,100
TCS 100	150	324	324	1,180	4,100	4,100





F_x= Max belt strength

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept


Data		
Belt	32AT5	
Sliding	4 caged ball roller slides size15	
Load bearing profile	MA 1-4 (see page 13)	
Pulley Ø	50.93	[mm]
Linear displacement per revolution	160	[mm]

Weights		
Inertia of the pulley	-	[kgm ²]
Belt weight	0.21	[kg/m]
Carriage weight	2.6	[kg]
Base module (stroke=0)	M _{base} =6.5	[kg]
1,000 mm profile	q=9.2	[kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

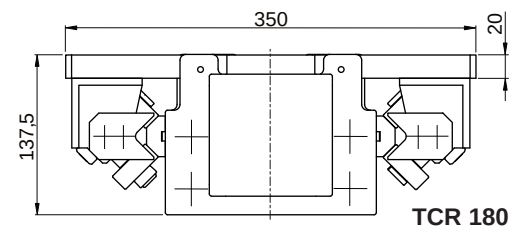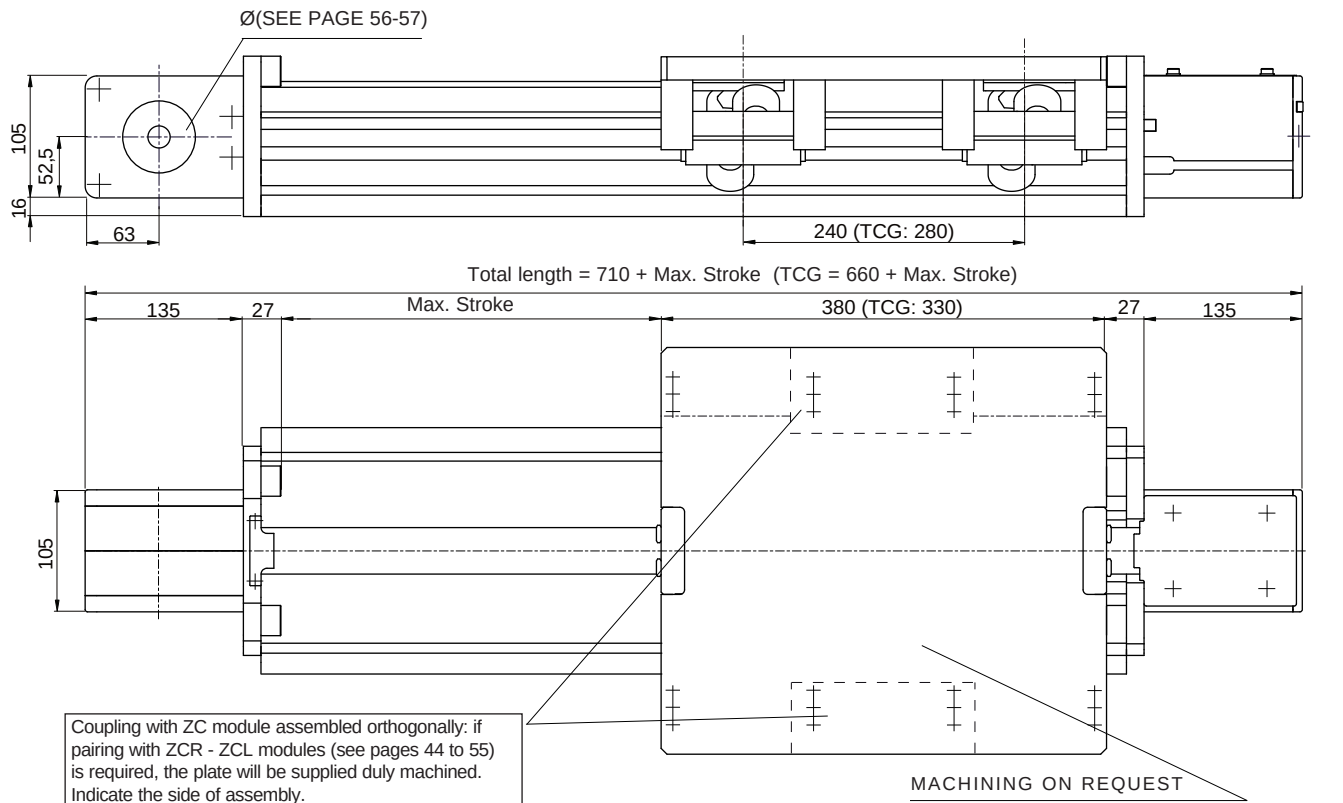

TCR 180

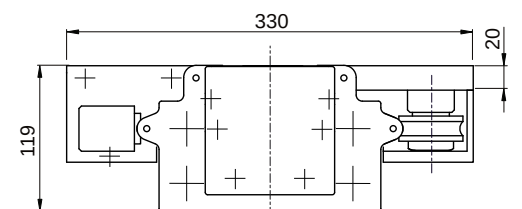

TCG 180

Performances	TCR 180	TCG 180	
Max. stroke	7,480	7,540	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	20	20	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	4.2	1.2	[Nm]


Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCR 180	630	800	800	3,300	7,320	7,320
TCG 180	220	270	540	3,300	3,400	1,800

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10


Data	TCR 180	TCG 180
Belt	40ATL10	
Slide	4 roller slides with 2 rollers 4 rollers Ø 52, guide Ø16	
Load bearing profile	E01-5	(see page 13)
Pulley Ø	92.31	[mm]
Linear displacement per rev.	290	[mm]

Weights	TCR 180	TCG 180
Inertia of the pulley	0.0037	[kgm ²]
Belt weight	0.55	[kg/m]
Carriage weight	12.4	10.6
Base module (stroke=0)	M _{base} =32	27.6
1,000 mm profile	q=21	q=16.8



Fx= Max belt strength

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

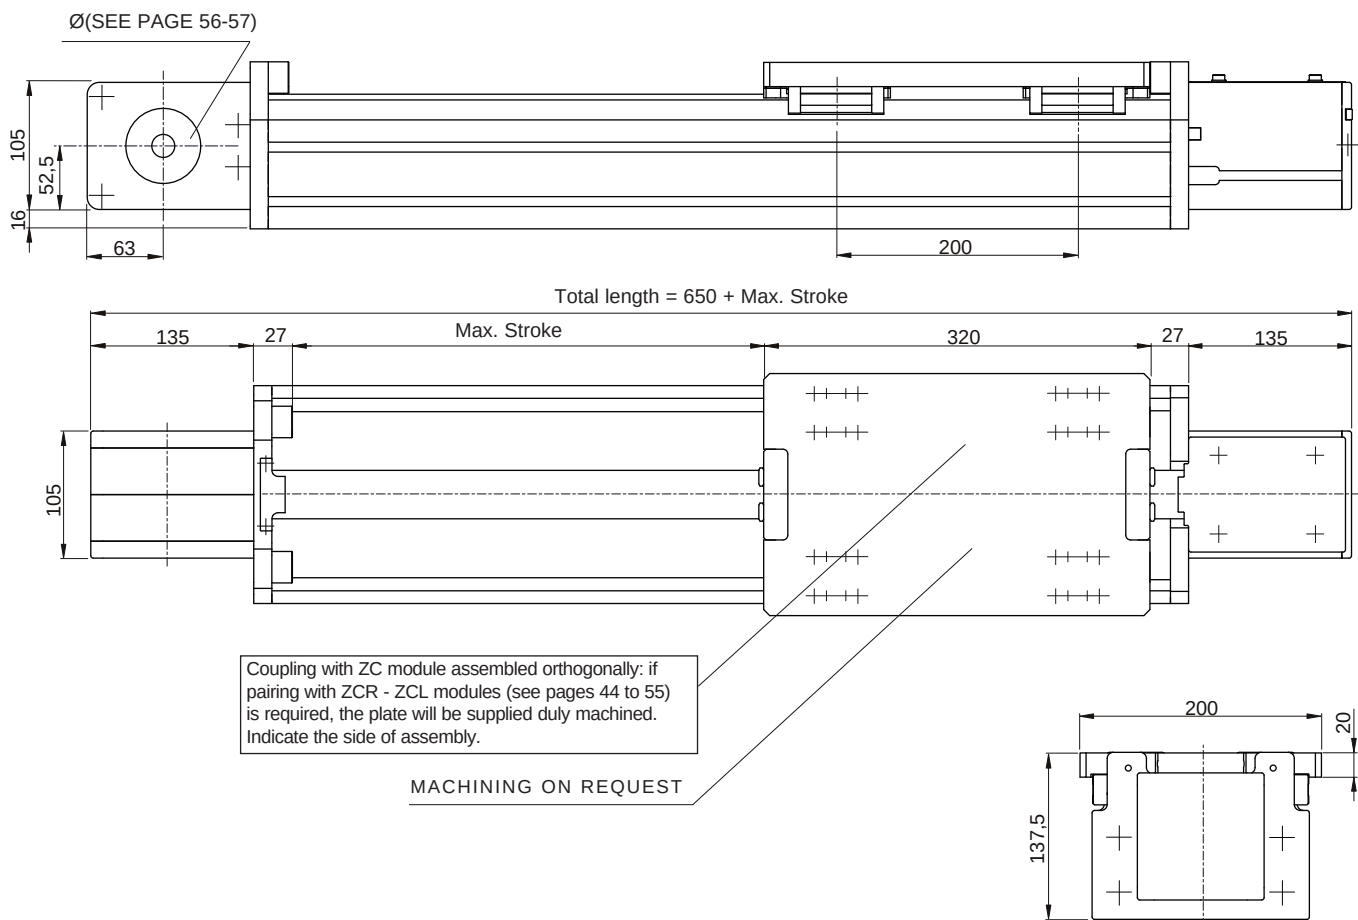


Performances	TCH 180	TCS 180	
Max. stroke	7,340	7,340	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	3.2	3.2	[Nm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCH 180	600	850	850	3,300	9,200	9,200
TCS 180	960	1,350	1,350	3,300	10,950	10,950

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept




F_x= Max belt strength

Data	TCH 180 - TCS 180
Belt	40ATL10
Slide	4 caged ball slides size 20
Load bearing profile	E01-5 (see page 13)
Pulley Ø	92.31 [mm]
Linear displacement per rev.	290 [mm]

Weights	TCH 180 - TCS 180
Inertia of the pulley	0.0037 [kgm ²]
Belt weight	0.55 [kg/m]
Carriage weight	6 [kg]
Base module (stroke=0)	M _{base} =23.6 [kg]
1,000 mm profile	q=19 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

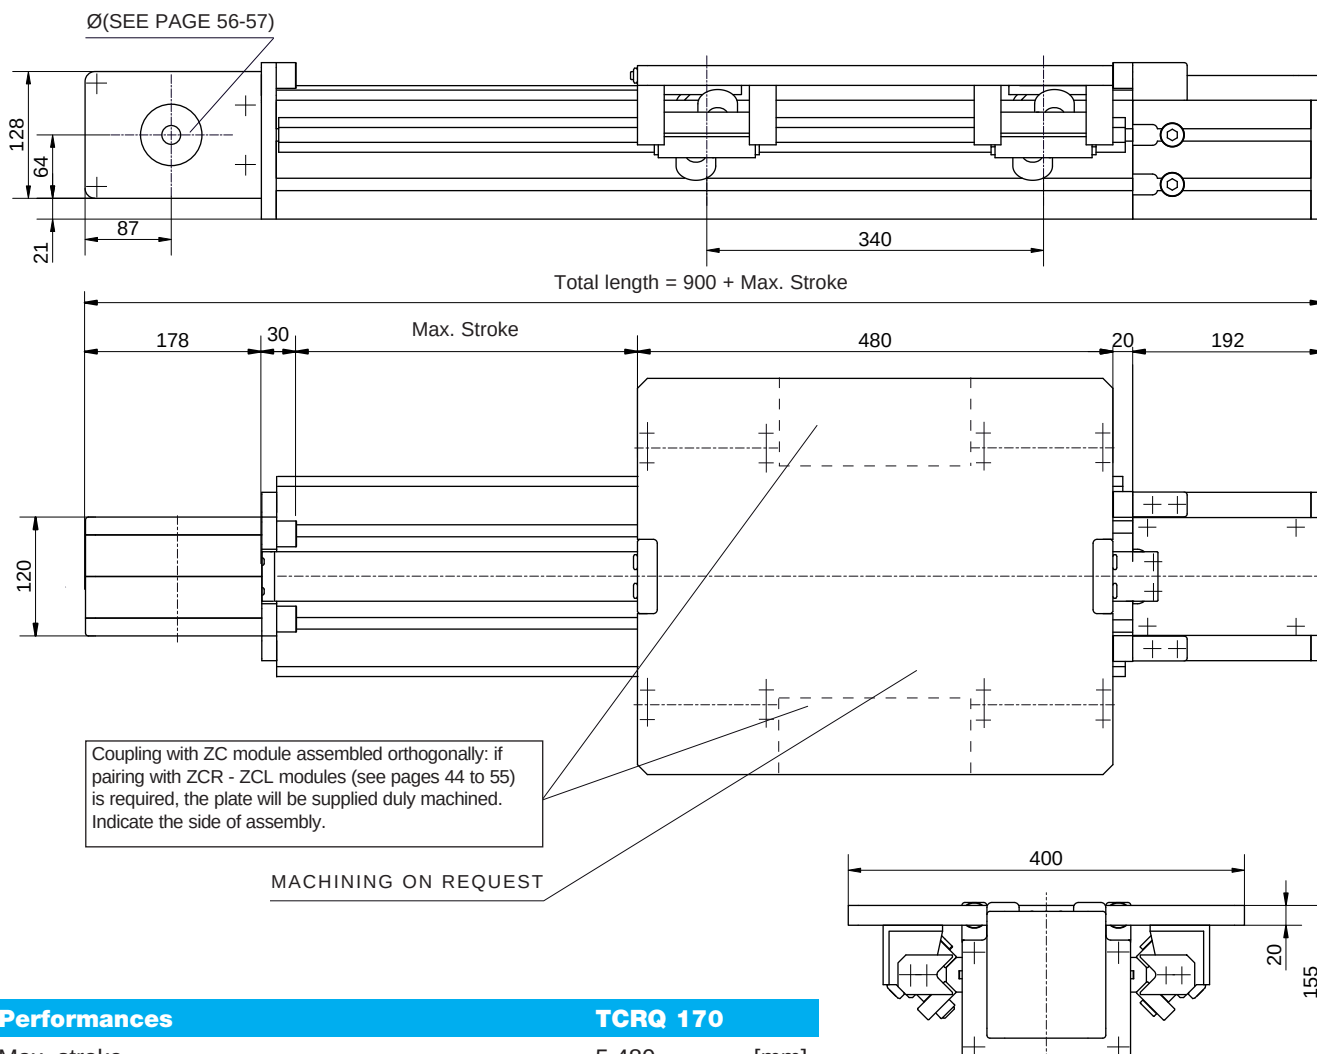


Performances	TCRQ 170	
Max. stroke	5,480	[mm]
Max. speed	7	[m/s]
Max. acceleration	20	[m/s ²]
Repeatability	± 0.1	[mm]
Loadless torque	4.2	[Nm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCRQ 170	620	1,100	1,100	4,000	7,620	7,620

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept




F_x= Max belt strength

Assembly positions and load direction, see page 10

Data	
Belt	50ATL10
Slides	4 slides 2 rollers Ø40[mm]
Load bearing profile	Statyca (see page 14)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	
Inertia of the pulley	0.0053 [kgm ²]
Belt weight	0.68 [kg/m]
Carriage weight	14.6 [kg]
Base module (stroke=0)	M _{base} =44.6 [kg]
1,000 mm profile	q=25 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

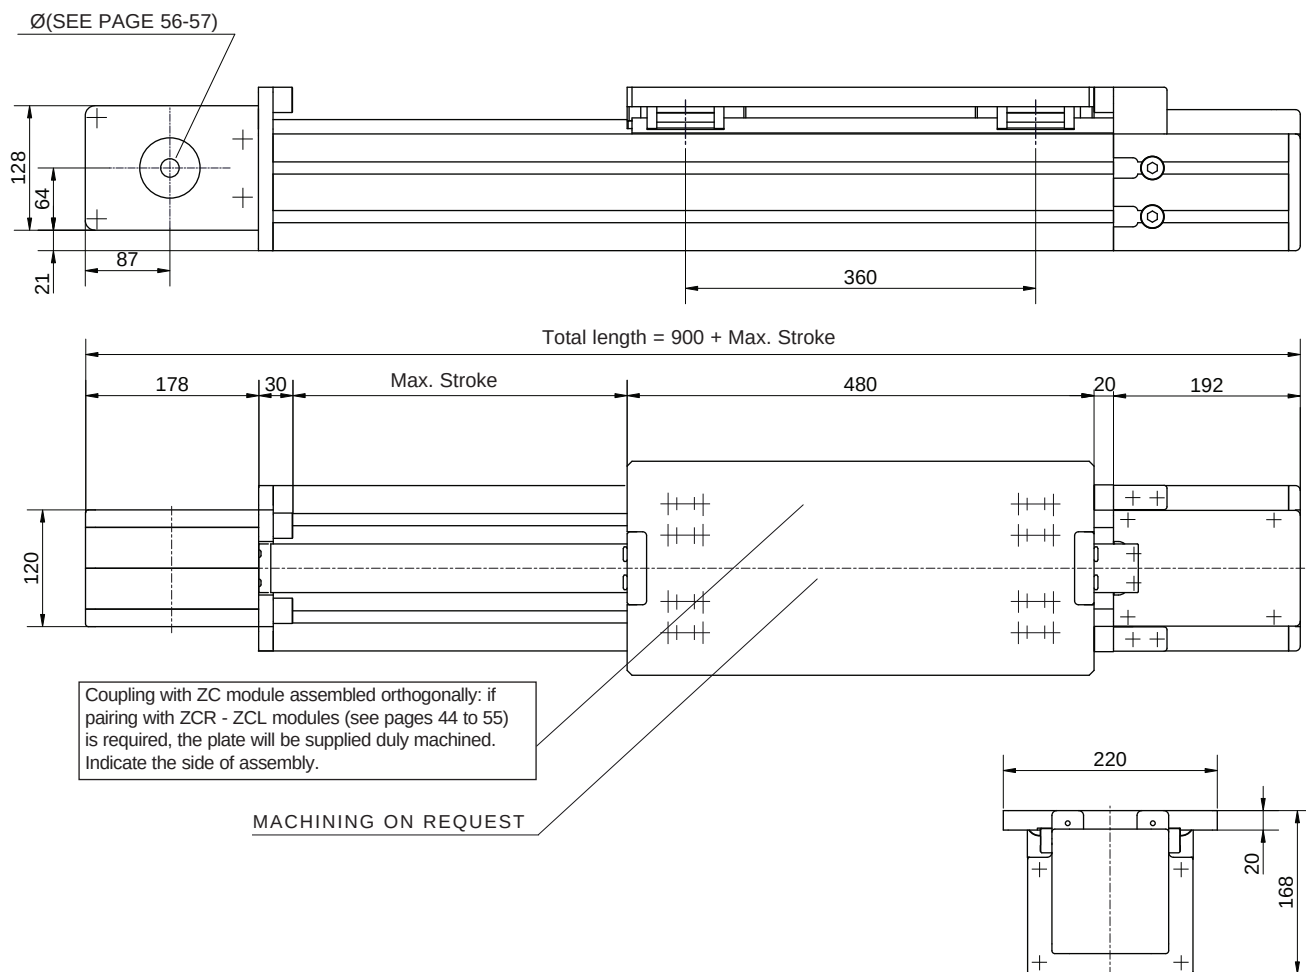


Performances	TCH 170	TCS 170	
Max. stroke	5,480	5,480	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	4.8	4.8	[Nm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCH 170	450	1,430	1,430	4,000	9,400	9,400
TCS 170	720	2,050	2,050	4,000	11,950	11,950

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept




F_x= Max belt strength

Data	TCH 170 - TCS 170
Belt	50ATL10
Slide	4 caged ball slides size 20
Load bearing profile	Statyca (see page 14)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	TCH 170 - TCS 170
Inertia of the pulley	0.0053 [kgm ²]
Belt weight	0.68 [kg/m]
Carriage weight	8.6 [kg]
Base module (stroke=0)	M _{base} =38 [kg]
1,000 mm profile	q=23 [kg]


To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

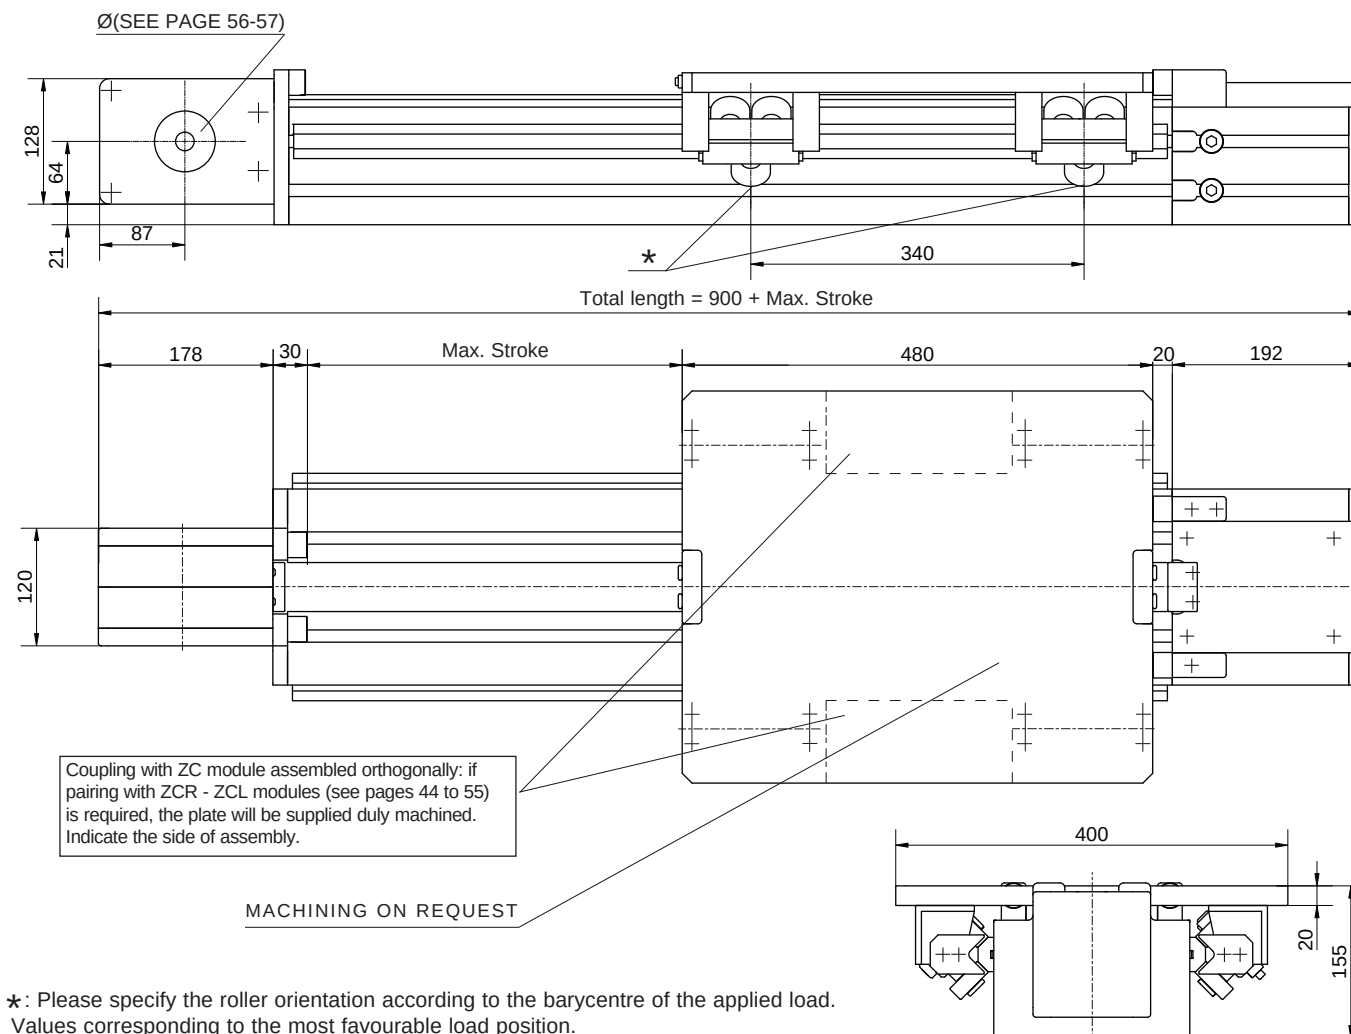

Performances	TCRQ 200	
Max. stroke	8,480	[mm]
Max. speed	5	[m/s]
Max. acceleration	20	[m/s ²]
Repeatability	± 0.1	[mm]
Loadless torque	4.2	[Nm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCRQ 200	1,300(*)	1,600(*)	1,300	4,000	7,620	12,500 (*)

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept




F_x= Max belt strength

Assembly positions and load direction, see page 10

Data	
Belt	50ATL10
Slide	4 slides 3 roll. Ø40 [mm]
Load bearing profile	Valyda (see page 14)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]


Weights	
Inertia of the pulley	0.0053 [kgm ²]
Belt weight	0.68 [kg/m]
Carriage weight	15 [kg]
Base module (stroke=0)	M _{base} =52 [kg]
1,000 mm profile	q=30 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

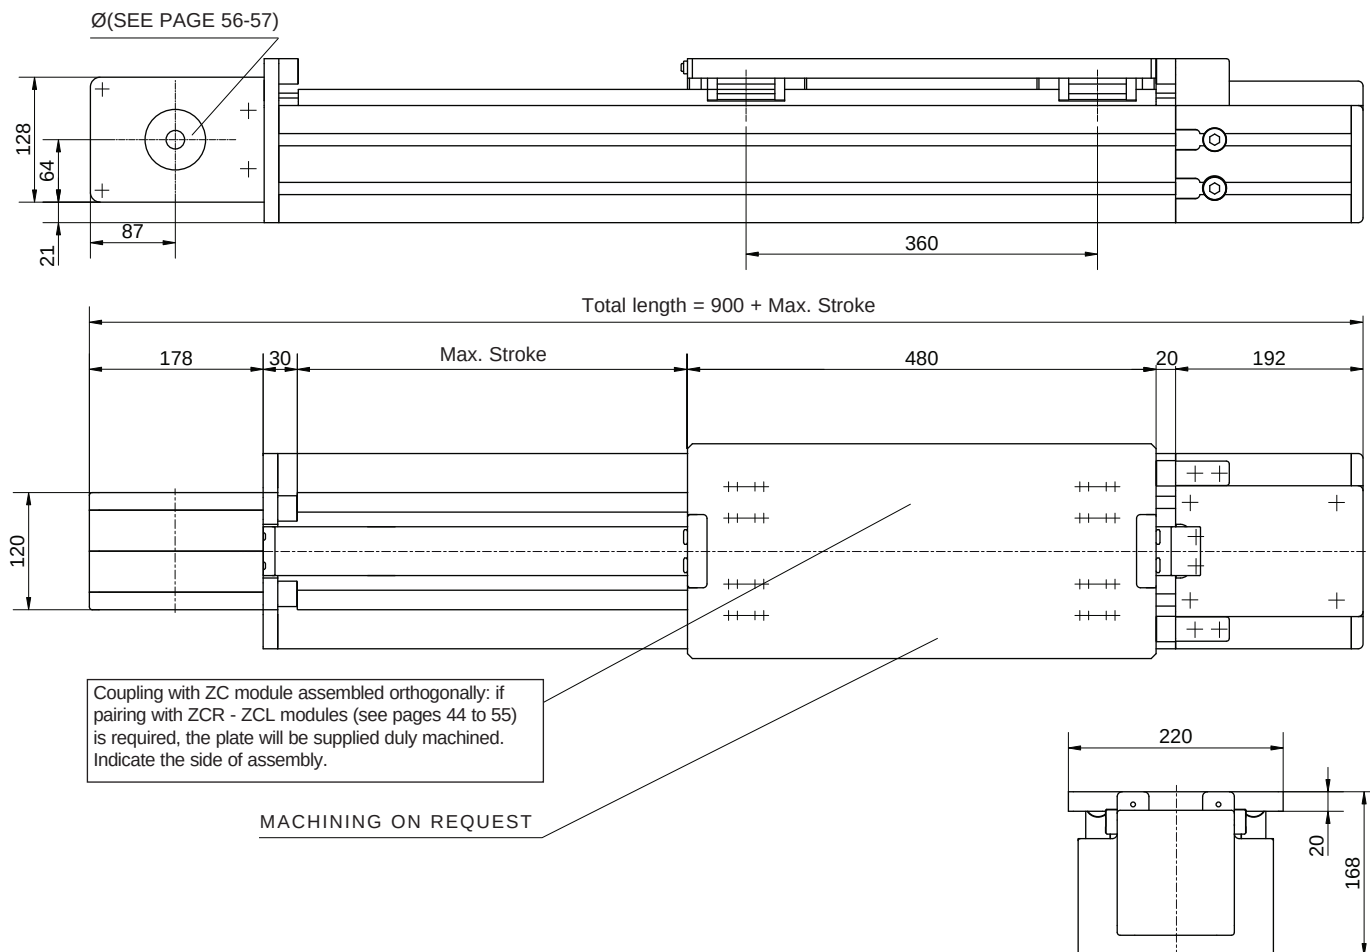

Performances	TCH 200	TCS 200	
Max. stroke	8,480	8,480	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	4.8	4.8	[Nm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCH 200	500	1,430	1,430	4,000	9,400	9,400
TCS 200	810	2,050	2,050	4,000	13,950	13,950




F_x= Max belt strength

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Data	TCH 200 - TCS 200
Belt	50ATL10
Slide	4 caged ball slides size 20
Load bearing profile	Valyda (see page 14)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	TCH 200 - TCS 200
Inertia of the pulley	0.0053 [kgm ²]
Belt weight	0.68 [kg/m]
Carriage weight	8,8 [kg]
Base module (stroke=0)	M _{base} =42 [kg]
1,000 mm profile	q=27.5 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

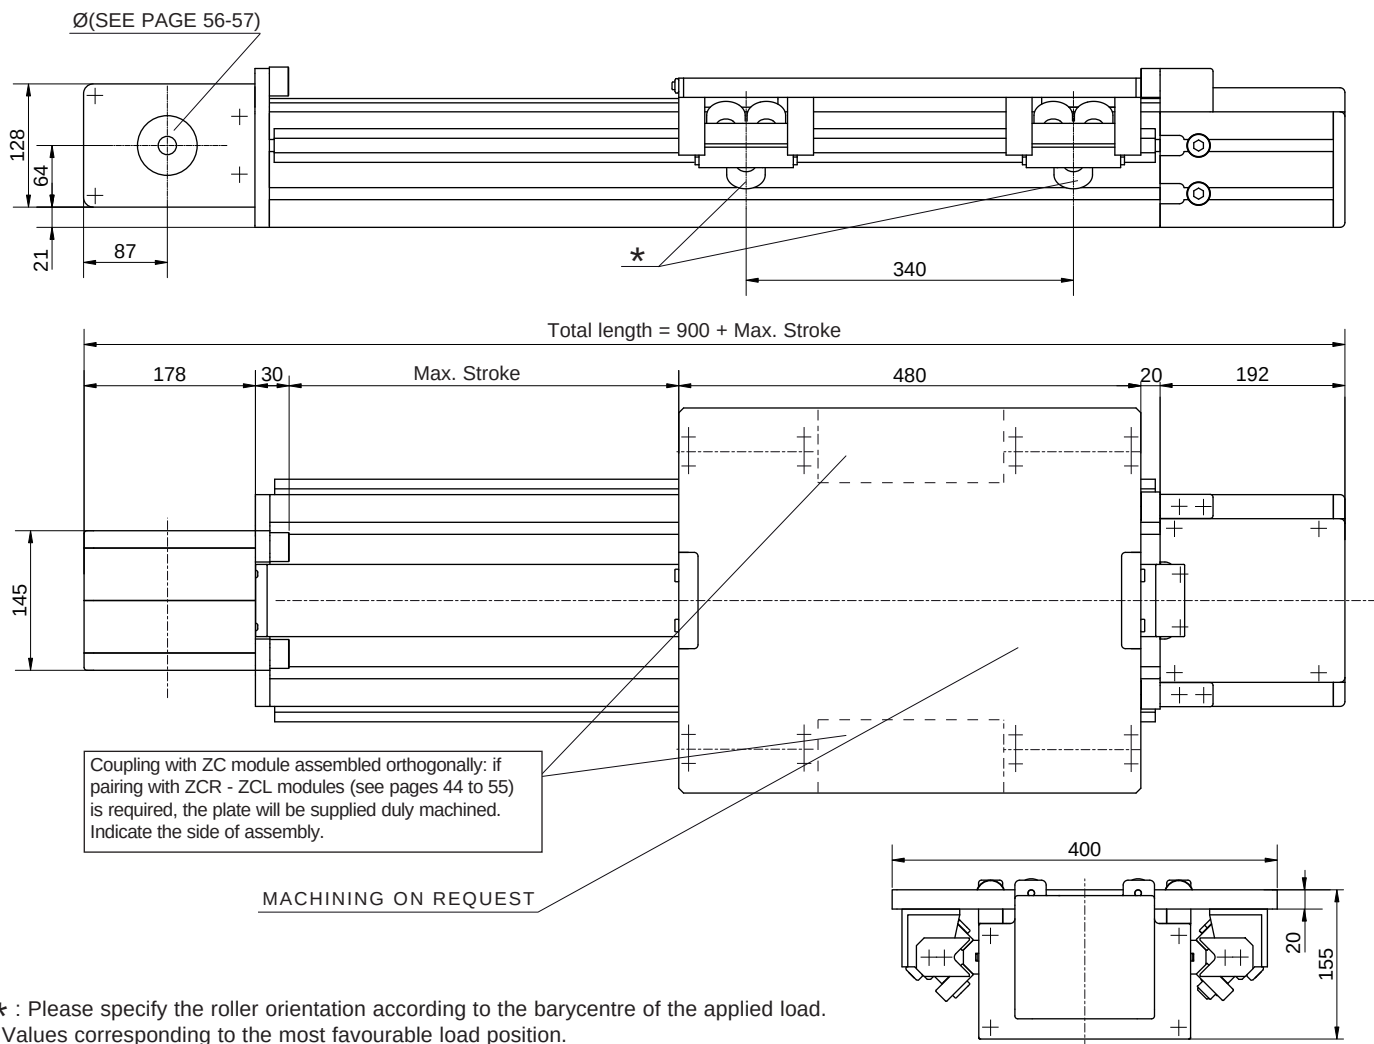


Performances		TCRQ 220
Max. stroke	11,480	[mm]
Max. speed	5	[m/s]
Max. acceleration	20	[m/s ²]
Repeatability	± 0.1	[mm]
Loadless torque	5.8	[Nm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCRQ220	1,400(*)	1,600(*)	1,300	6,000	7,620	12,500(*)

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept




F_x= Max belt strength

Assembly positions and load direction, see page 10

Data	
Belt	75ATL10
Slide	4 slides 3 roll. Ø 40 [mm]
Load bearing profile	Logyca (see page 14)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]


Weights	
Inertia of the pulley	0,0082 [kgm ²]
Belt weight	1,02 [kg/m]
Carriage weight	16 [kg]
Base module (stroke=0)	M _{base} =54.6 [kg]
1,000 mm profile	q= 33.7 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

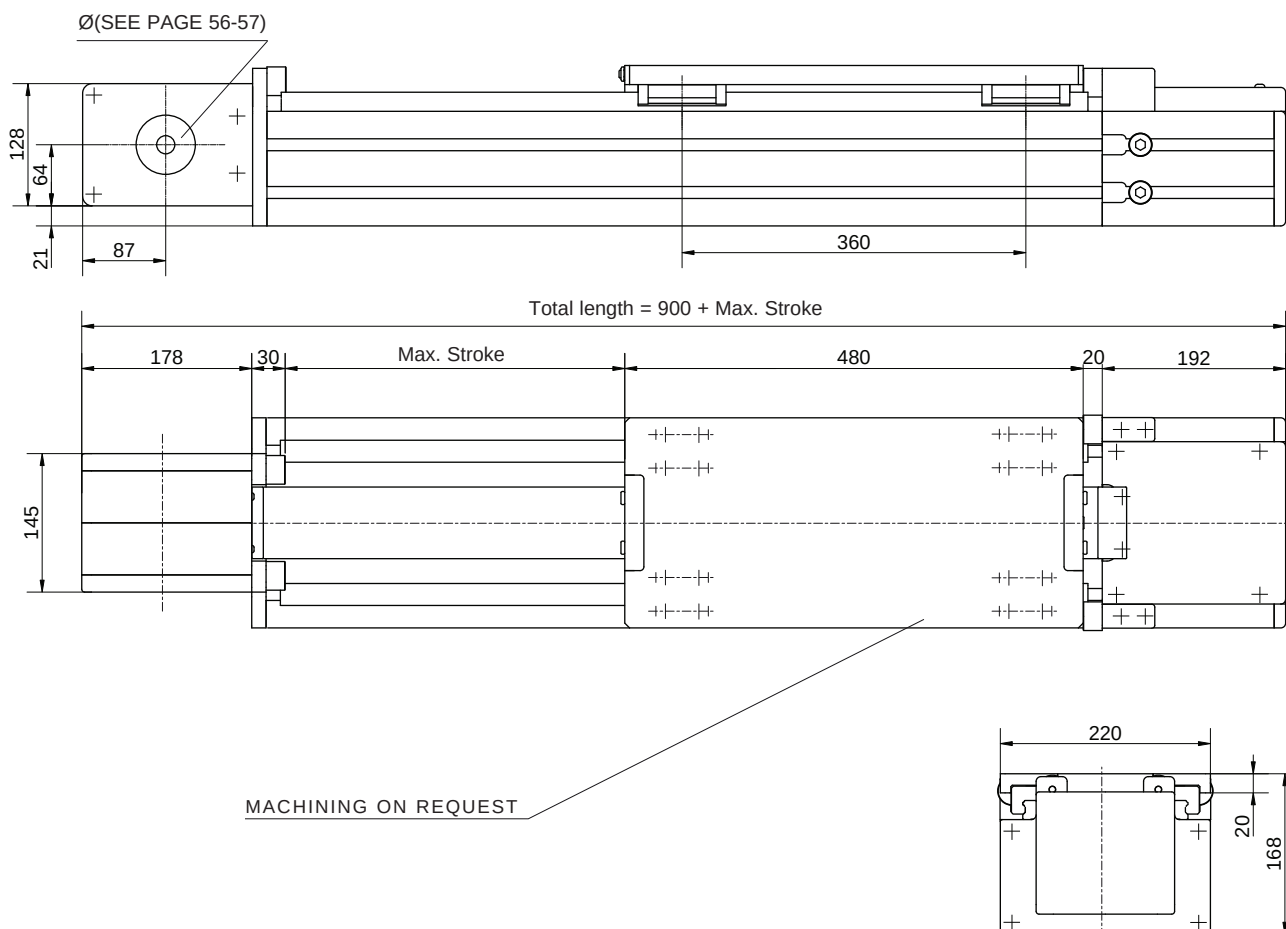

Performances	TCH 220	TCS 220	
Max. stroke	11,480	11,480	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	6.9	6.9	[Nm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCH 220	950	2,200	2,200	6,000	13,000	13,000
TCS 220	1,300	3,200	3,200	6,000	18,300	18,300



F_x = Max belt strength

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Data	TCH 220 - TCS 220
Belt	75ATL10
Slide	4 caged ball slides size 25
Load bearing profile	Logyca (see page 14)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	TCH 220 - TCS 220
Inertia of the pulley	0.0082 [kgm ²]
Belt weight	1.02 [kg/m]
Carriage weight	9.5 [kg]
Base module (stroke=0)	M _{base} =47.4 [kg]
1,000 mm profile	q=33 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)


TCRQ 280 (TCRP 280)

V-SHAPED GUIDE RAILS WITH ROLLER SLIDES

Registered model*

RP= Heavy guide rails and roller slides - Ø52

Accessories: see page 11

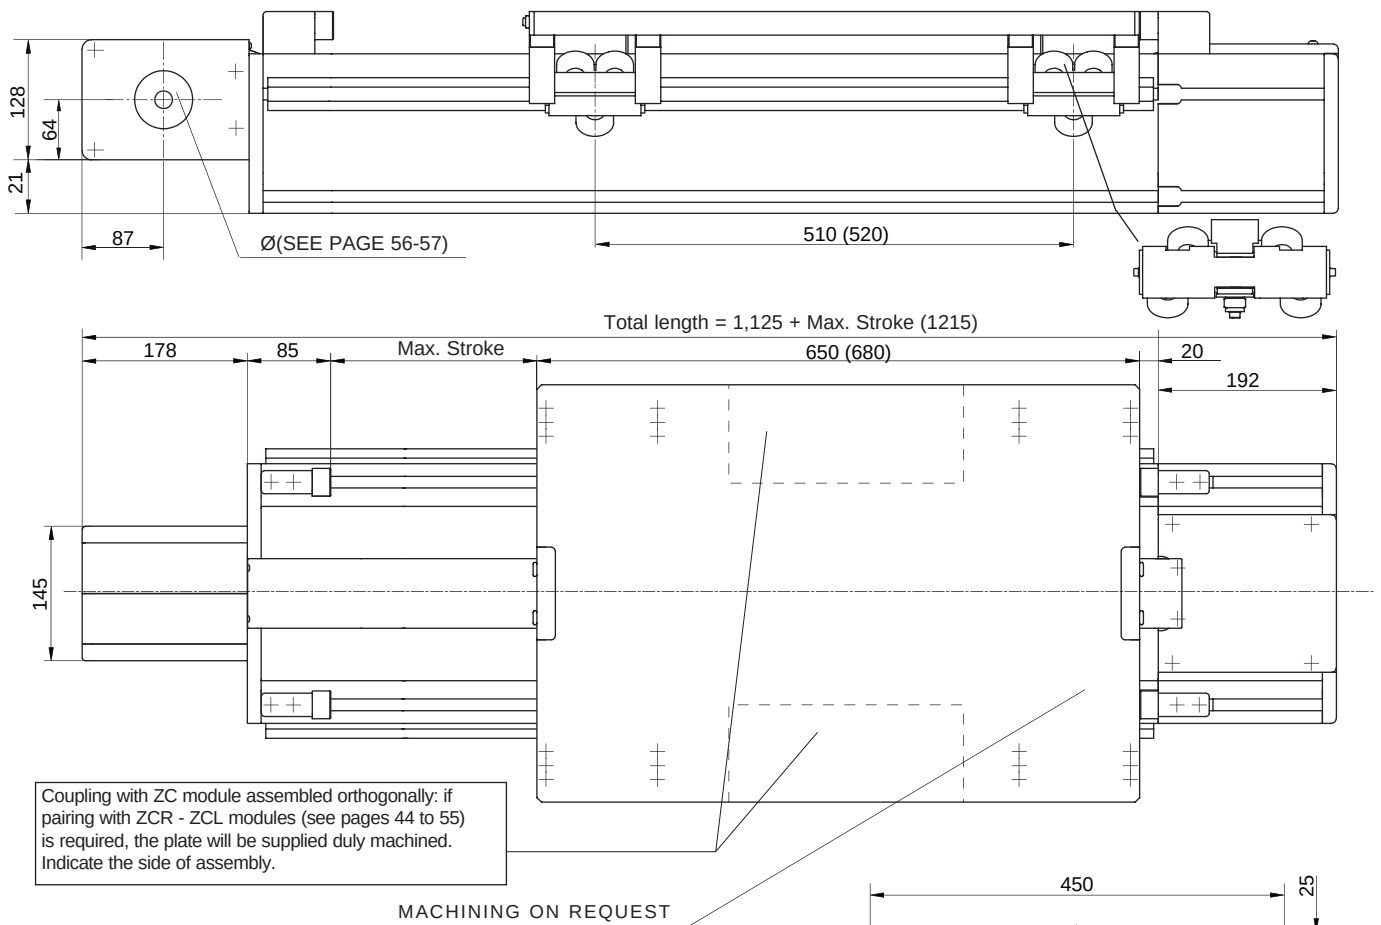

* Versions with a 100 mm belt are also available. (TCRE/TCREP)

Performances	TCRQ 280 (TCRP280)		
Max. stroke	11,315	11,175	[mm]
Max. speed	7	5	[m/s]
Max. acceleration	20	10	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	7.6	8.5	[Nm]


Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCRQ 280 1,950(*)	3,100(*)	1,950	6,000	7,620	13,500(*)	
TCRP 280 3,100	4,150	4,150	6,000	20,100	20,100	

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10


Data	TCRQ 280 (TCRP 280)	
Belt	75 ATL 10	
Slide	4 slides 3 rollers Ø40	4 slides 4 rollers Ø52 [mm]
Load bearing profile	Pratyca (see page 15)	
Pulley Ø	95.49 [mm]	
Linear displacement per rev.	300 [mm]	

Weights	TCRQ 280 (TCRP 280)	
Inertia of the pulley	0.0082 [kgm ²]	
Belt weight	1.02 [kg/m]	
Carriage weight	27	55 [kg]
Base module	M _{base} =87	M _{base} =122 [kg]
1,000 mm profile	q=48	q=56 [kg]



Fx= Max belt strength

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

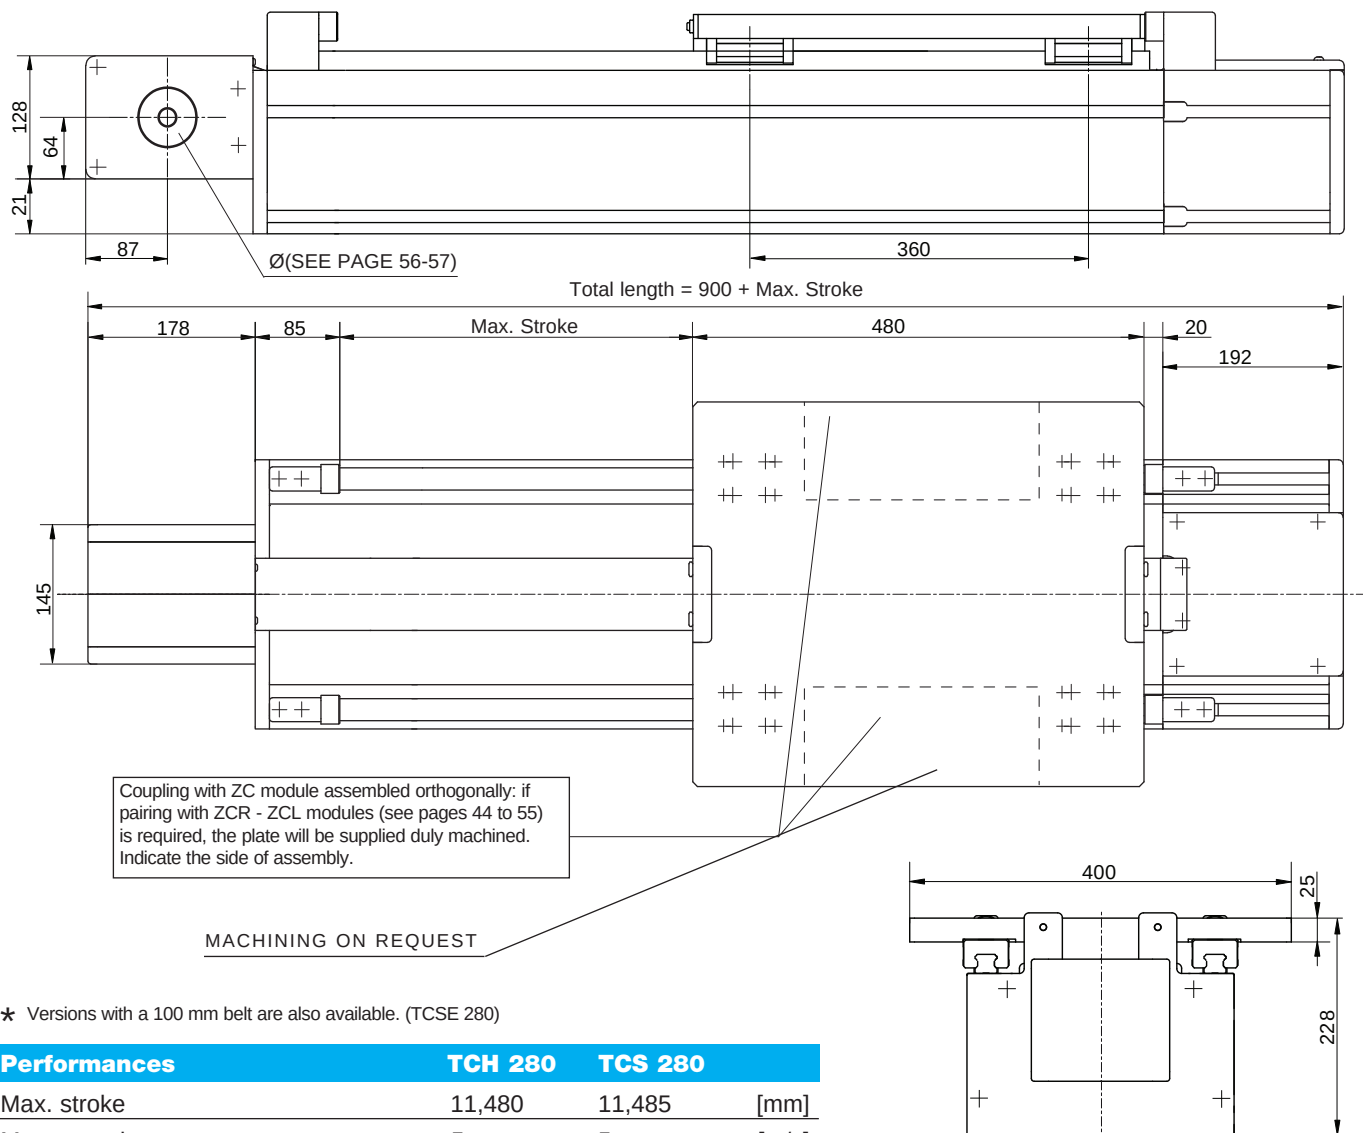


★ Versions with a 100 mm belt are also available. (TCSE 280)

Performances	TCH 280	TCS 280	
Max. stroke	11,480	11,485	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	8.3	8.3	[Nm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCH 280	1,450	2,200	2,200	6,000	13,500	13,500
TCS 280	1,950	3,200	3,200	6,000	20,300	20,300

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept




F_x = Max belt strength

Data	TCH 280 - TCS 280
Belt	75 ATL 10
Slide	4 caged ball slides size 25
Load bearing profile	Pratyca (see page 15)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	TCH 280 - TCS 280
Inertia of the pulley	0.0082 [kgm ²]
Belt weight	1.02 [kg/m]
Carriage weight	18 [kg]
Base module (stroke=0)	M _{base} =69 [kg]
1,000 mm profile	q= 47 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

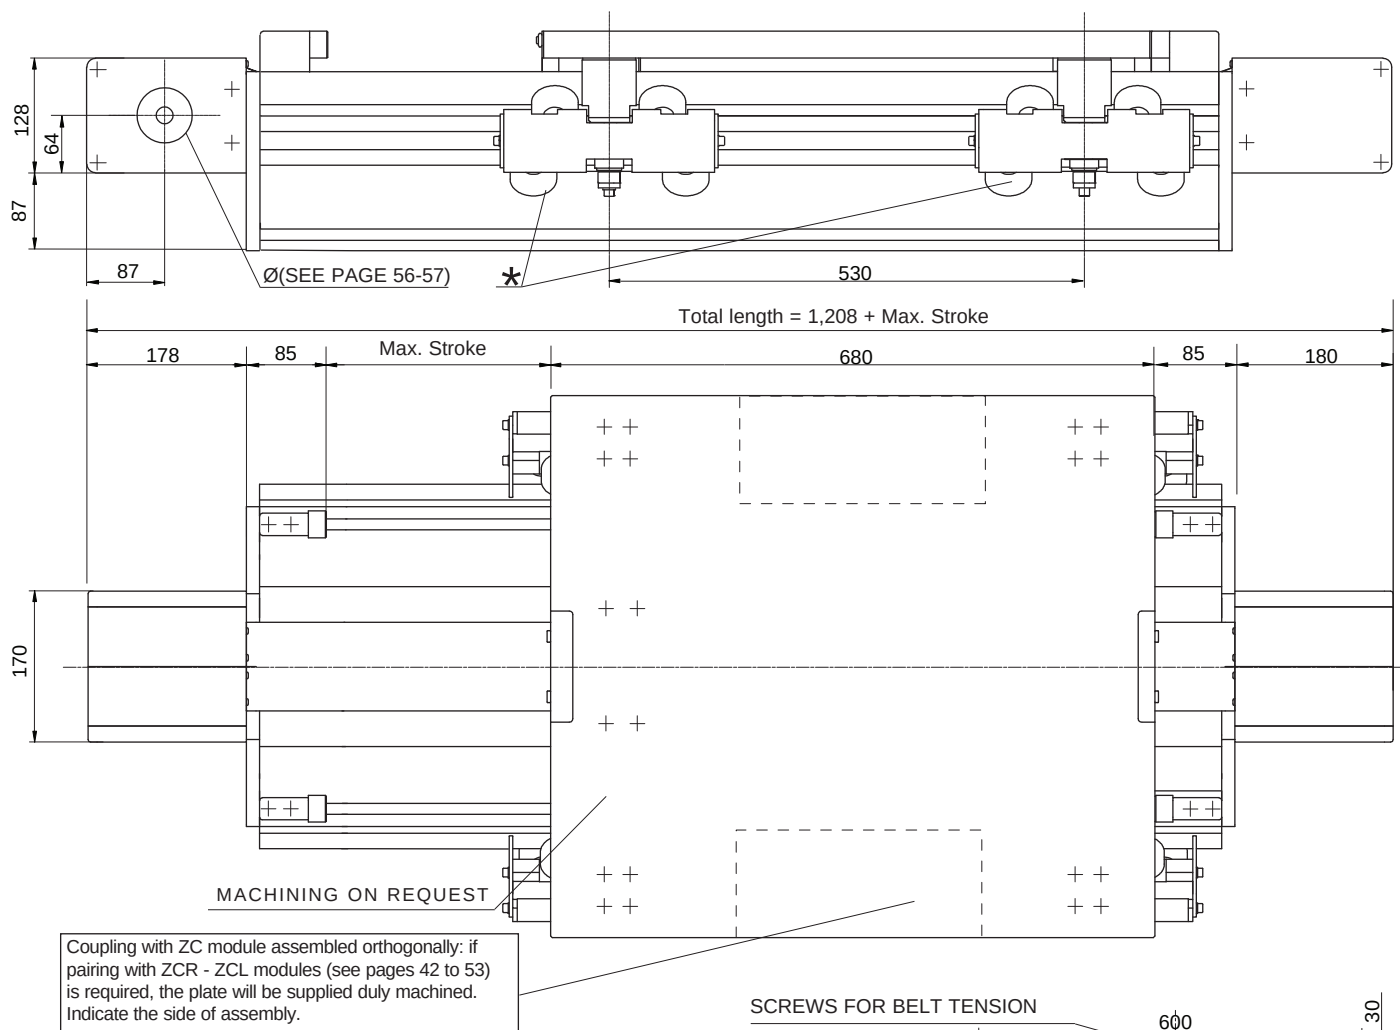

★ Versions with a 150 mm belt are also available. (TCRPE360)

Performances	TCRP 360	
Max. stroke	11,175	[mm]
Max. speed	5	[m/s]
Max. acceleration	10	[m/s ²]
Repeatability	± 0.1	[mm]
Loadless torque	8.5	[Nm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCRP 360	4,900	5,300	5,300	8,000	25,400	25,400


The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10

Data	
Belt	100 ATL 10
Slide	4 slides 4 rollers Ø52 [mm]
Load bearing profile	Solyda (see page 15)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]


Weights

Inertia of the pulley	0.0082	[kgm ²]
Belt weight	1.02	[kg/m]
Carriage weight	55	[kg]
Base module (stroke=0)	M _{base} =137	[kg]
1,000 mm profile	q=75	[kg]




F_x= Max belt strength

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

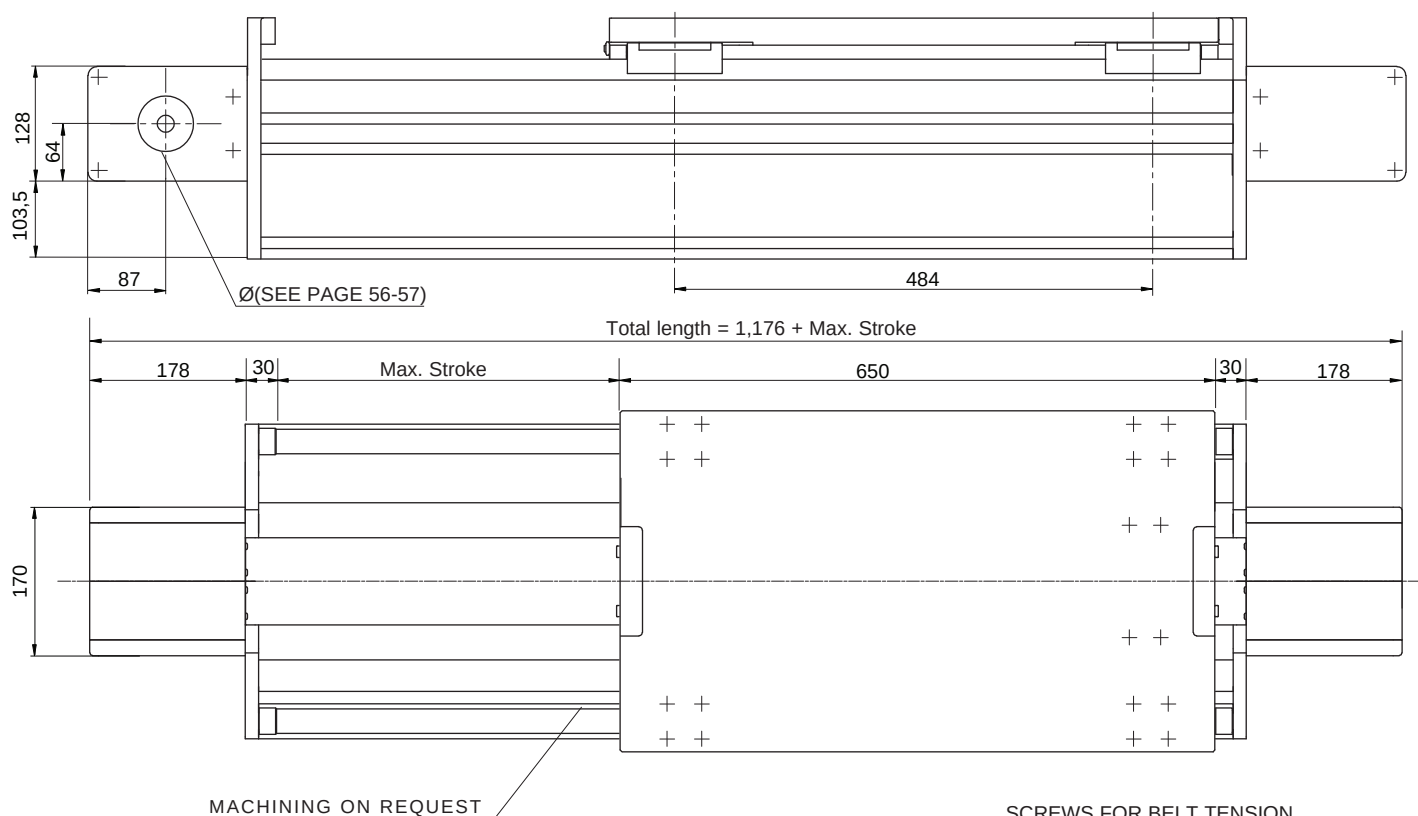

SCREWS FOR BELT TENSION

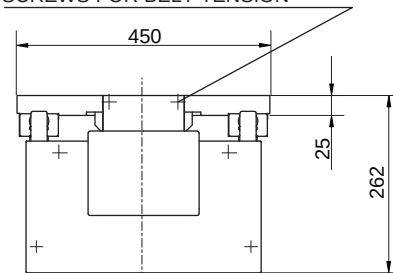

★ Versions with a 150 mm belt are also available. (TCSE360)

Performances	TCH 360	TCS 360	
Max. stroke	11,480	11,485	[mm]
Max. speed	5	5	[m/s]
Max. acceleration	50	50	[m/s ²]
Repeatability	± 0.1	± 0.1	[mm]
Loadless torque	8.3	8.3	[Nm]


Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TCH 360	2,600	3,710	3,710	8,000	19,050	19,050
TCS 360	4,000	5,500	5,500	8,000	28,600	28,600

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept


Data	TCH 360 - TCS 360
Belt	100 ATL 10
Slide	4 caged ball roller slides 30
Load bearing profile	Solyda (see page 15)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	TCH 360 - TCS 360
Inertia of the pulley	0.0082 [kgm ²]
Belt weight	1.02 [kg/m]
Carriage weight	28 [kg]
Base module (stroke=0)	M _{base} =105 [kg]
1,000 mm profile	q= 70 [kg]



F_x= Max belt strength

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

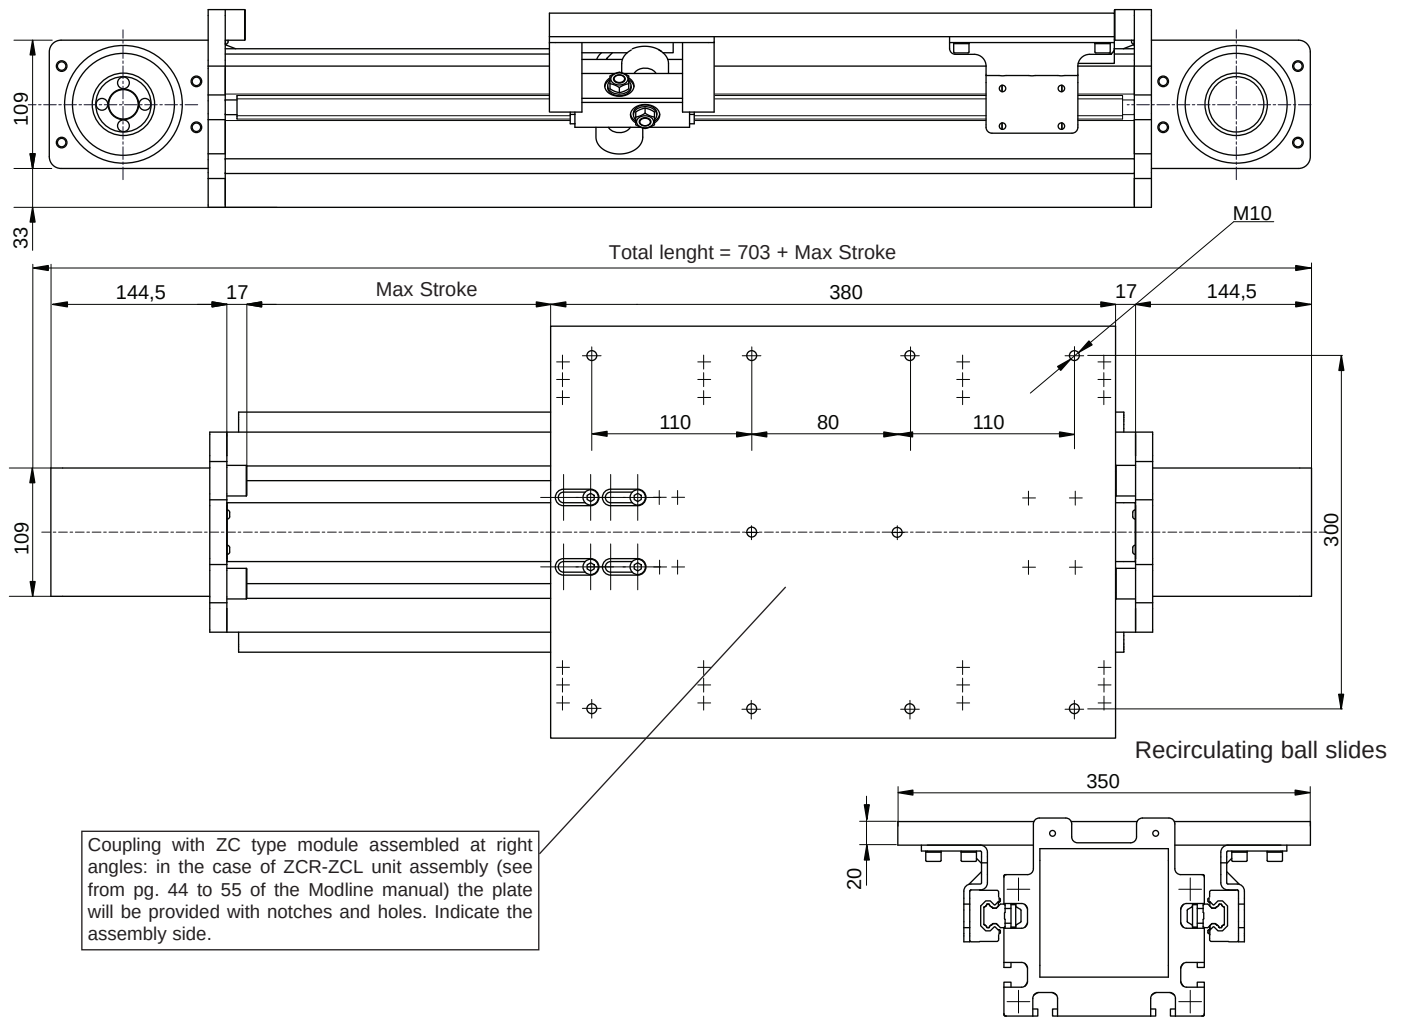


Performances	TECR 170	TECH 170	
Max stroke	5.560	5.560	[mm]
Max speed	5	4	[m/s]
Max acceleration	15	20	[m/s ²]
Repositioning accuracy	± 0.1	± 0.1	[mm]
Loadless torque	4.2	4.8	[Nm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
TECR 170	620	1.600	1.600	4.000	6.000	6.000
TECH 170	580	900	1.050	4.000	7.620	7.620

The dynamic values indicated do not correspond to maximum theoretical load capacities. They already take safety factors into account which are suitable for machinery in the automation sector. In the event of combined stress consult the technical support service.

Constructive data	TECR 170 - TECH 170
Belt	50 ATL 10
Sliding (TECR170)	4 roller slides [mm]
Sliding (TECH 170)	4 ball slides size 20 [mm]
Profile	Statyca
Pulley Ø	95,49 [mm]
Linear displacement per revolution	300 [mm]


Weight	TECH 170 - TECR 170
Inertia of the pulley	0,0053 [kgm ²]
Belt weight	0,68 [kg/m]
Carriage weight	8,6 [kg]
Base module (corsa=0)	M _{base} = 38 [kg]
1.000 mm profile	q=23 [kg]




F_x= Max belt strenght

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{Stroke}_{max} / 1.000$ (where Stroke_{max} is expressed in mm)



Patent pending

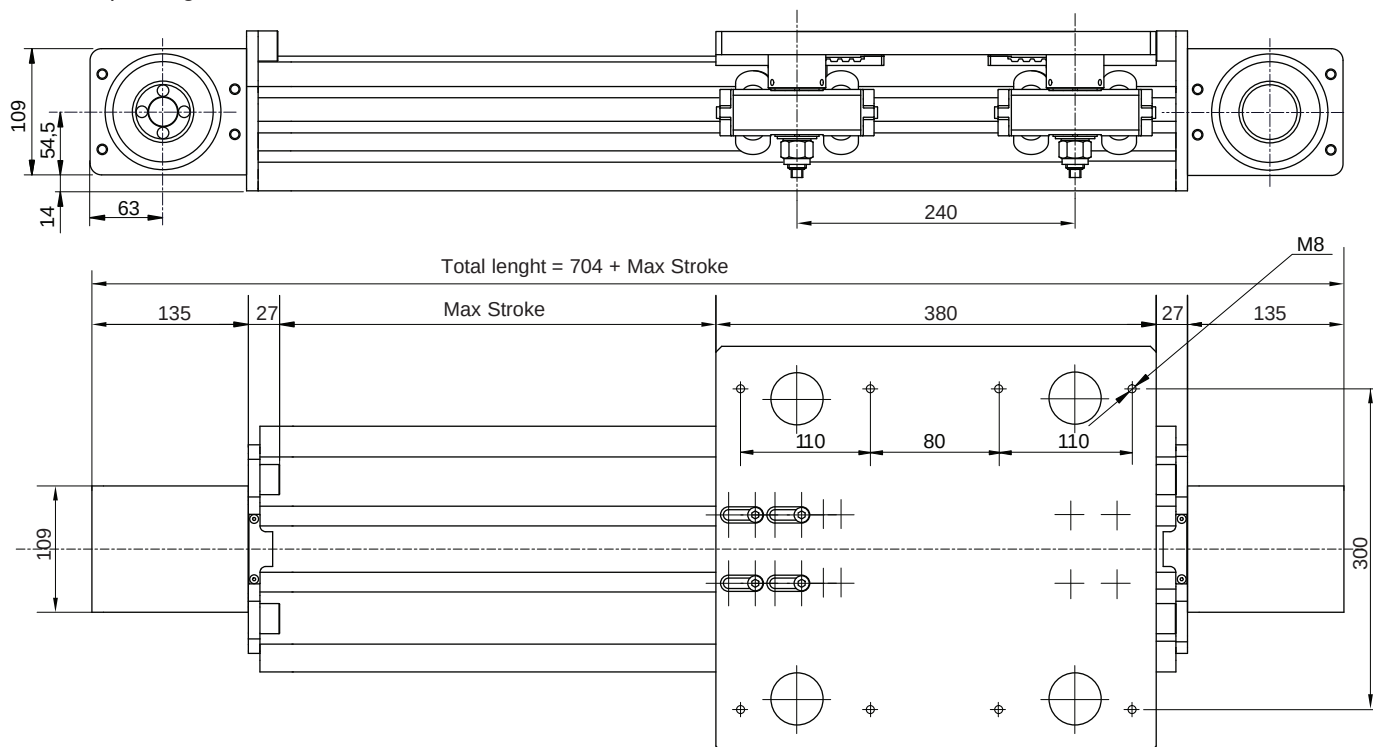

Recirculating ball slides

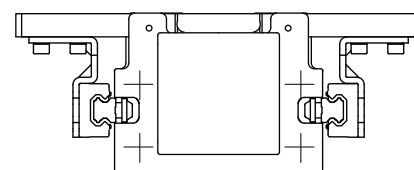

Roller slides

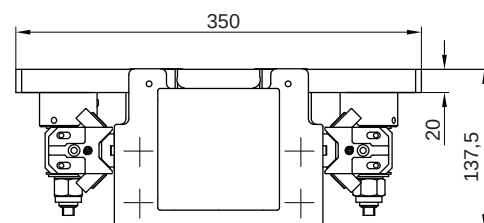
 F_x = Max belt strenght

Performances

TECRR 180

Max stroke	7.480	[mm]
Max speed	5	[m/s]
Max acceleration	20	[m/s ²]
Repositioning accuracy	± 0,1*	[mm]
Loadless torque	4,2	[Nm]

Suggested working load conditions

Module	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
TECRR180	490	1.170	1.170	2.700	5.900	5.900

The dynamic values indicated do not correspond to maximum theoretical load capacities. They already take safety factors into account which are suitable for machinery in the automation sector. In the event of combined stress consult the technical support service.


Constructive data

Belt	40ATL10
Sliding	4 slides 4 rollen Ø30 [mm]
Profile	180x90
Pulley Ø	92,31 [mm]
Linear displacement per revolution	290 [mm]

Weight

Inertia of the pulley	0,0037	[kgm ²]
Belt weight	0,55	[kg/m]
Carriage weight	13	[kg]
Base module (stroke=0)	$M_{base}=33$	[kg]
1.000 mm profile	$q=16$	[kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{Stroke}_{max} / 1.000$ (where Stroke_{max} is expressed in mm)

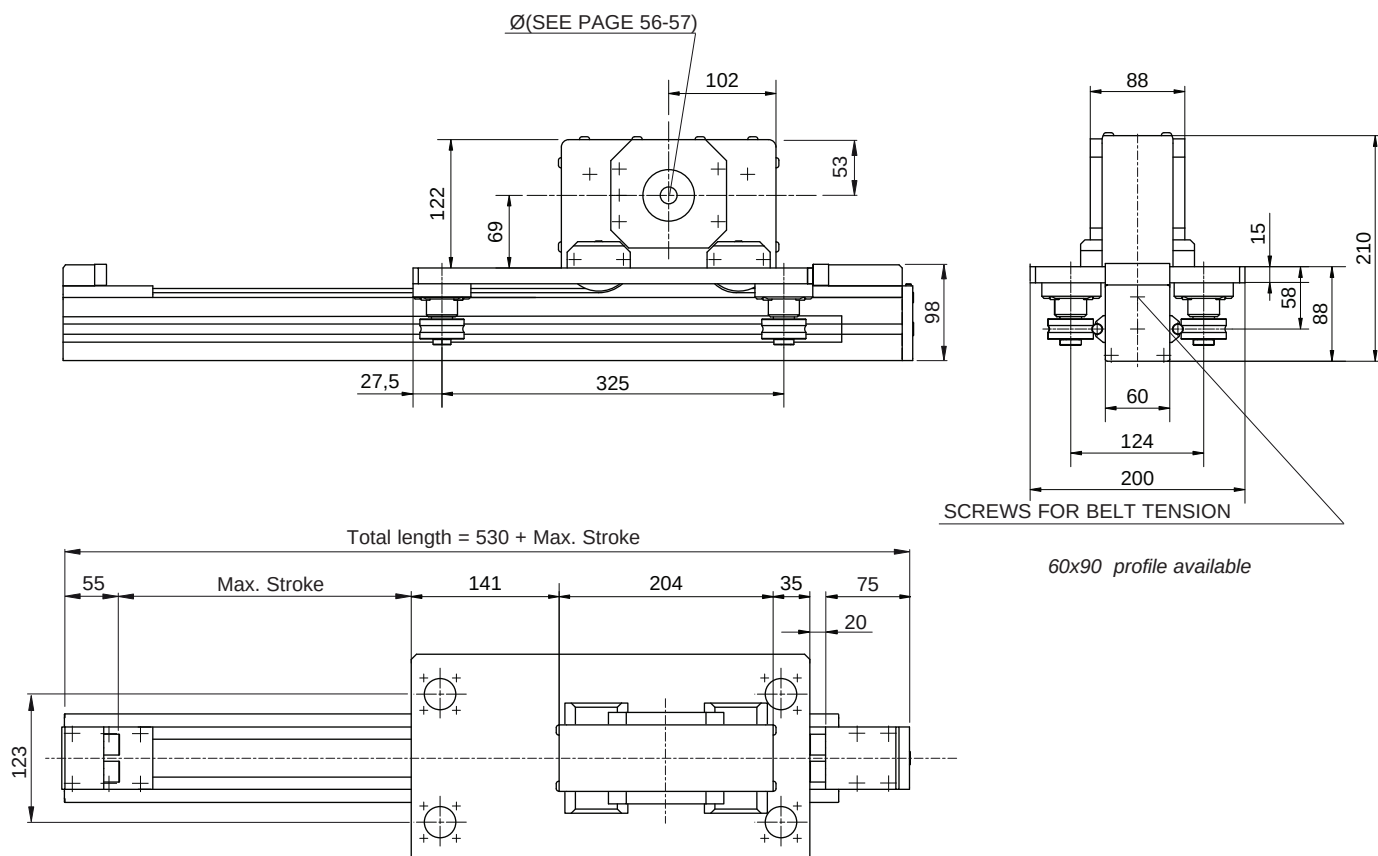

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCG 60	
Max. stroke	5,470	[mm]
Max. speed	4	[m/s]
Max. acceration	20	[m/s ²]
Repeatability	± 0.1	[mm]


Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCG 60	60	200	340	2,000	2,100	1,500

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10


Data		
Belt	32AT10	
Slide	4 shaped roller slides Ø 42 [mm]	
Load bearing profile	F01-1	(see page 12)
Pulley Ø	70.03	[mm]
Linear displacement per rev.	220	[mm]

Weights		
Inertia of the pulley	0.0013	[kgm ²]
Belt weight	0.19	[kg/m]
Carriage weight	10	[kg]
Base module (stroke=0)	M _{base} =14	[kg]
1,000 mm profile	q=6	[kg]




F_x= Max belt strength

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

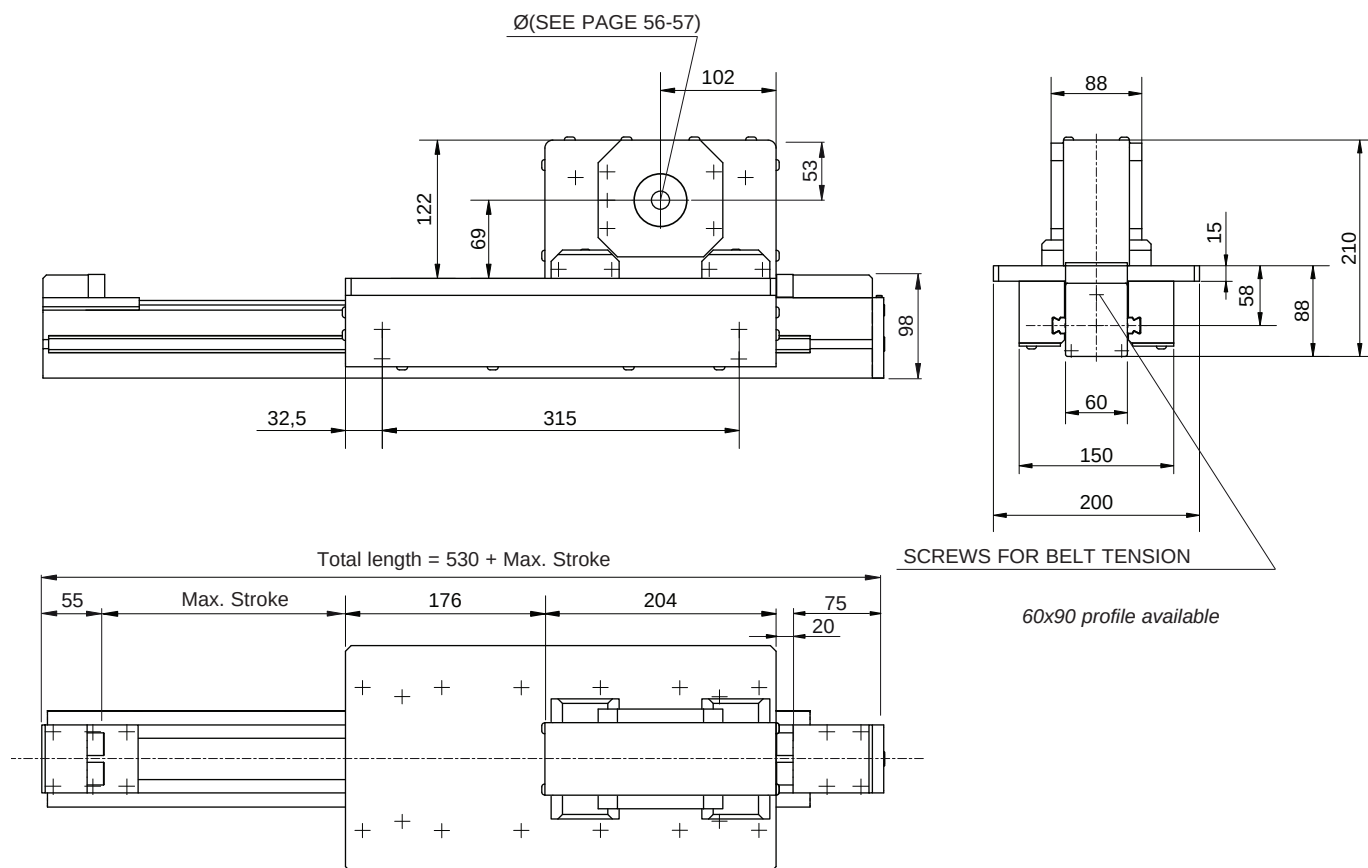

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCL 60	
Max. stroke	5,470	[mm]
Max. speed	4	[m/s]
Max. acceleration	40	[m/s ²]
Repeatability	± 0.1	[mm]



Fx= Max belt strength


Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCL 60	151	570	630	2,000	4,180	3,740

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept


Data		
Belt	32AT10	
Slide	4 caged ball roller slides 15	
Load bearing profile	F01-1	(see page 12)
Pulley Ø	70.03	[mm]
Linear displacement per rev.	220	[mm]

Weights		
Inertia of the pulley	0.0013	[kgm ²]
Belt weight	0.19	[kg/m]
Carriage weight	11	[kg]
Base module (stroke=0)	M _{base} =16	[kg]
1,000 mm profile	q=7.2	[kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

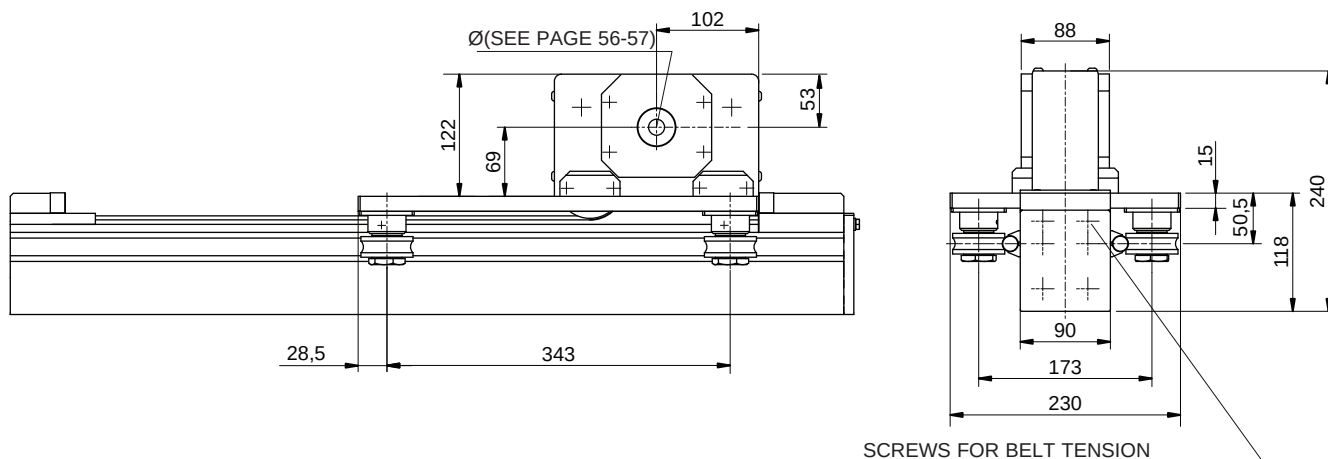

90x180 profile available

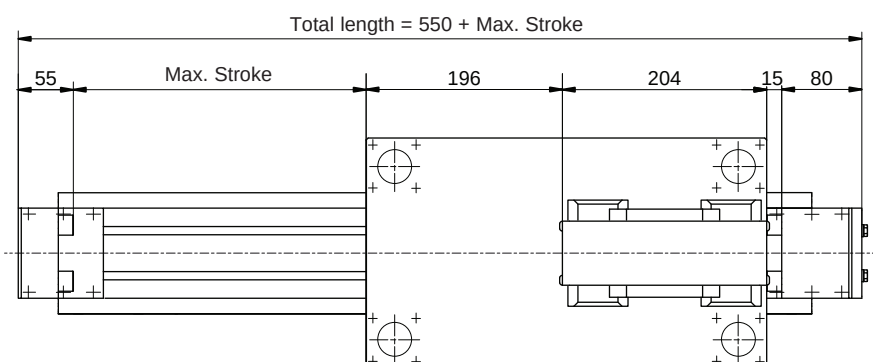

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCG 90	
Max. stroke	5,450	[mm]
Max. speed	4	[m/s]
Max. acceleration	15	[m/s ²]
Repeatability	± 0.1	[mm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCG 90	120	400	540	2,000	3,400	1,800


The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10

Data	
Belt	32AT10
Slide	4 shap. r. Ø52 - guide Ø16
Load bearing profile	E01-4 (see page 12)
Pulley Ø	70.03 [mm]
Linear displacement per rev.	220 [mm]

Weights	
Inertia of the pulley	0.0013 [kgm ²]
Belt weight	0.19 [kg/m]
Carriage weight	10.5 [kg]
Base module (stroke=0)	M _{base} =16 [kg]
1.000 mm profile	q=8.5 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

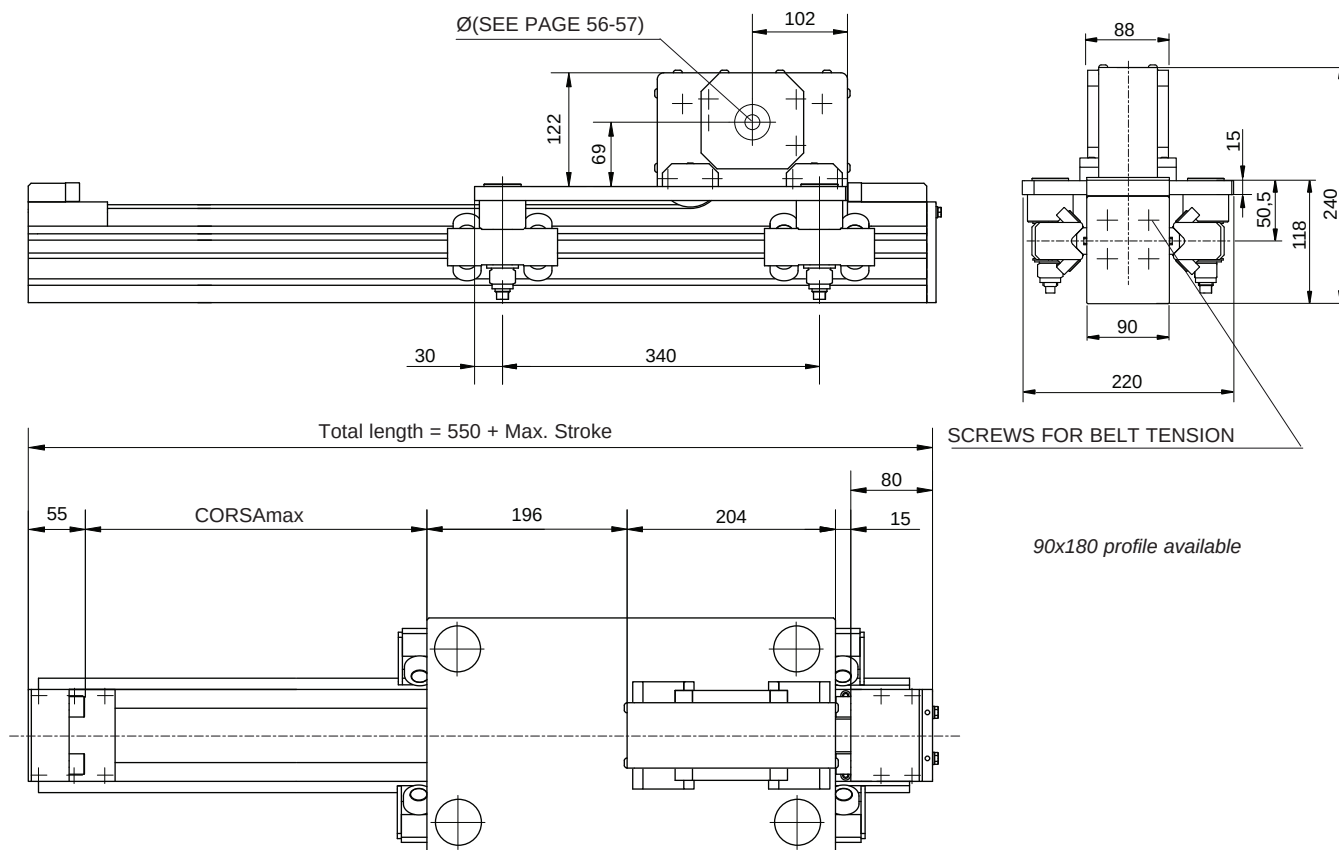

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCRR 90	
Max. stroke	5,450	[mm]
Max. speed	4	[m/s]
Max. acceleration	25	[m/s ²]
Repeatability	± 0.1	[mm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCRR 90	300	1,000	1,000	2,000	6,700	6,700


The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10


Data	
Belt	32 AT 10
Slide	4 slides 4 roll. Ø30 [mm]
Load bearing profile	E01-4 (see page 12)
Pulley Ø	70.03 [mm]
Linear displacement per rev.	220 [mm]

Weights	
Inertia of the pulley	0.0013 [kgm ²]
Belt weight	0.21 [kg/m]
Carriage weight	13 [kg]
Base module (stroke=0)	M _{base} = 20 [kg]
1,000 mm profile	q=11.2 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)



F_x = Max belt strength

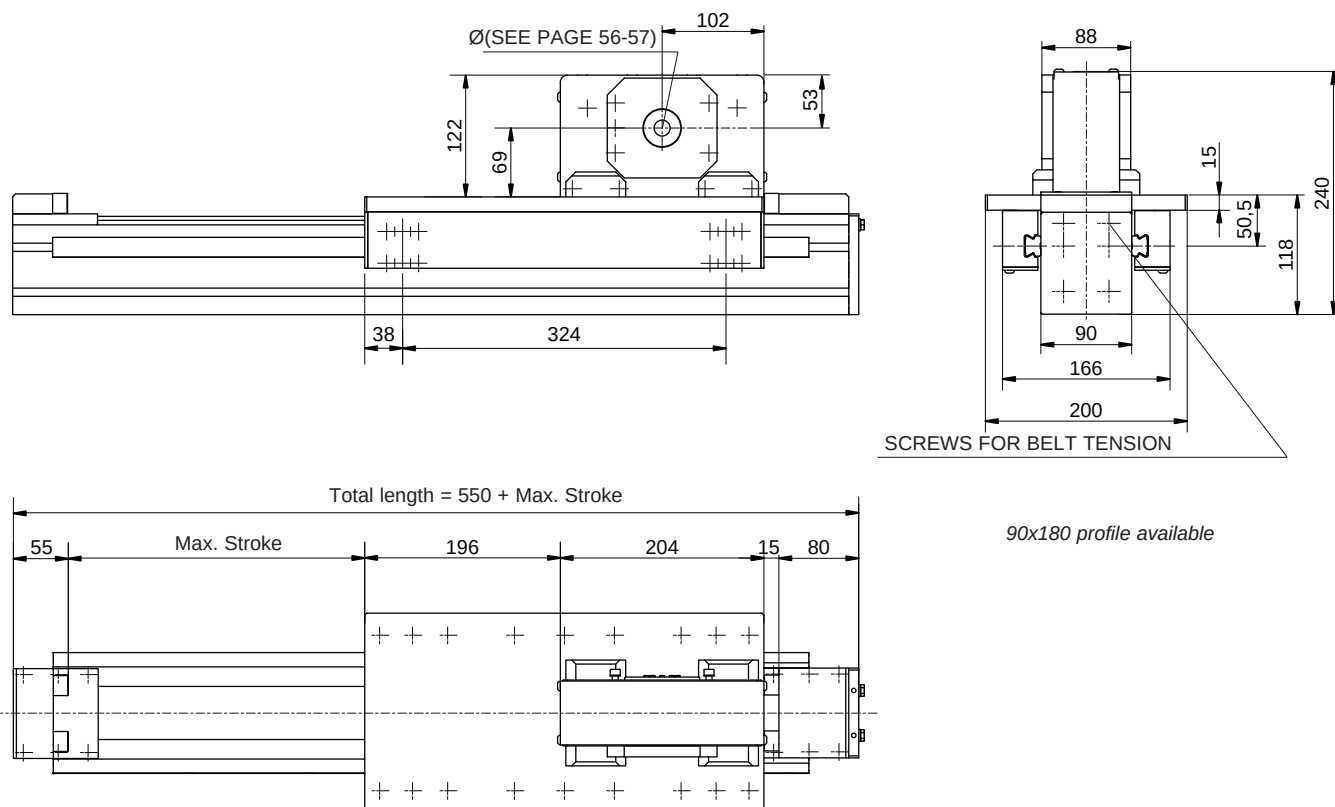

90x180 profile available

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCL 90	
Max. stroke	5,450	[mm]
Max. speed	4	[m/s]
Max. acceleration	20	[m/s ²]
Repeatability	± 0.1	[mm]

Suggested working load conditions


Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCL 90	260	730	1,000	2,000	5,500	5,000

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Data	
Belt	32AT10
Slide	4 caged ball roller slides 20
Load bearing profile	E01-4 (see page 12)
Pulley Ø	70.03 [mm]
Linear displacement per rev.	220 [mm]


Weights	
Inertia of the pulley	0.0013 [kgm ²]
Belt weight	0.19 [kg/m]
Carriage weight	11.5 [kg]
Base module (stroke=0)	M _{base} =18.5 [kg]
1,000 mm profile	q=11.5 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

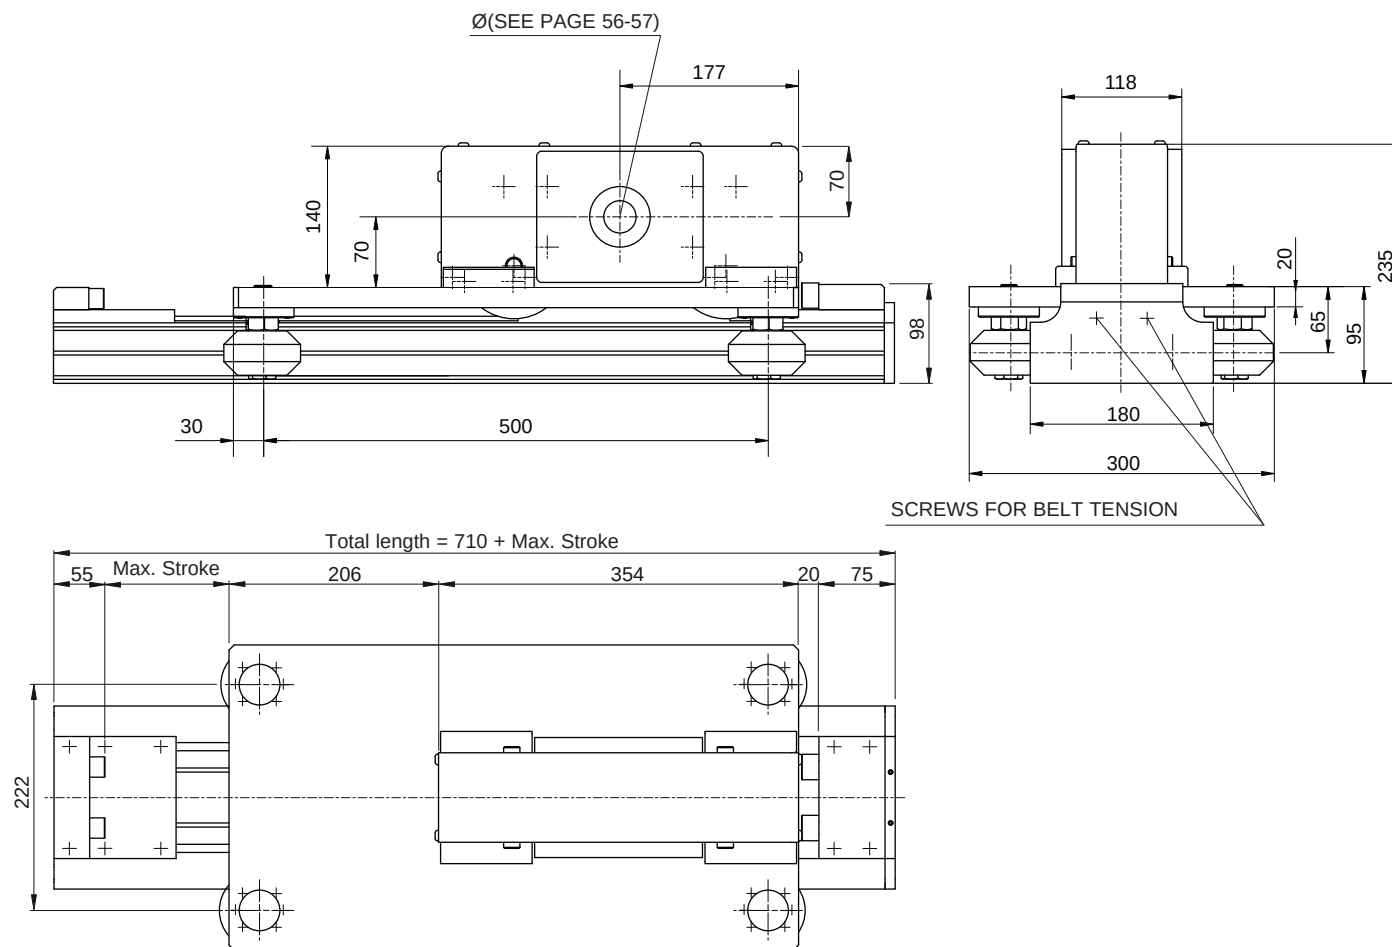

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCY 180	
Max. stroke	6,750	[mm]
Max. speed	4	[m/s]
Max. acceleration	15	[m/s ²]
Repeatability	± 0.6	[mm]



Fx= Max belt strength

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCY 180	220	350	280	3,000	2,400	1,800


The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10

Data	
Belt	50ATL10
Slide	4 Rollers Ø 76 [mm]
Load bearing profile	Sys -1G (see page 15)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	
Inertia of the pulley	0.0067 [kgm ²]
Belt weight	0.34 [kg/m]
Carriage weight	23.2 [kg]
Base module (stroke=0)	M _{base} =33.5 [kg]
1,000 mm profile	q=12.5 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

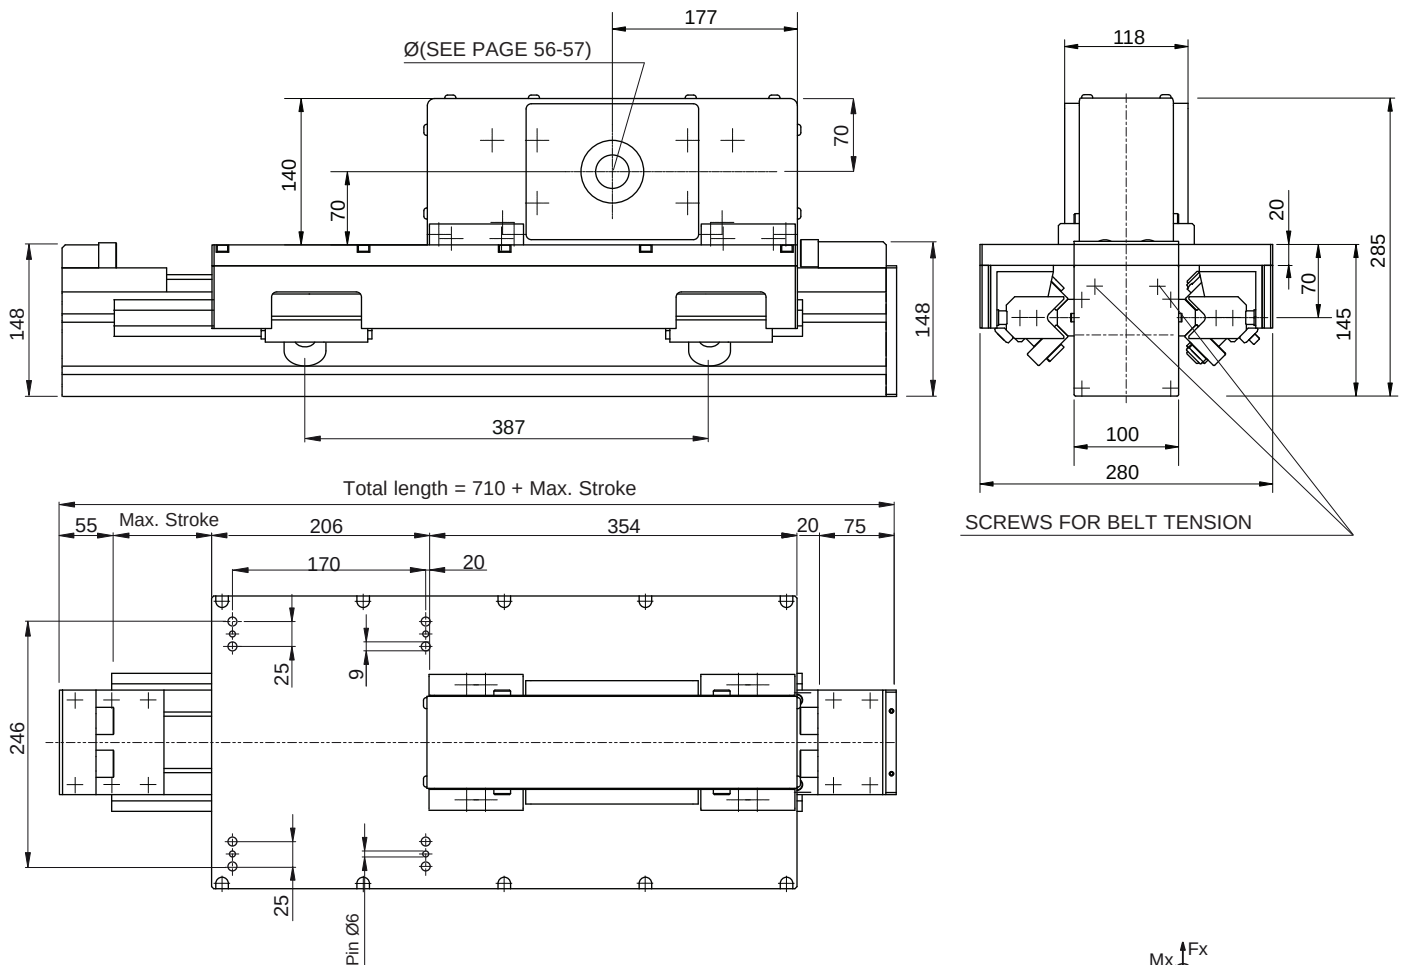

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCRQ 100	
Max. stroke	5,300	[mm]
Max. speed	4	[m/s]
Max. acceleration	25	[m/s ²]
Repeatability	± 0.1	[mm]


Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCRQ 100	360	1,200	1,200	4,000	7,320	7,320

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.
In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10


Data	
Belt	50 ATL 10
Slide	4 slides 2 roll. Ø 40 [mm]
Load bearing profile	MA 1-5 (see page 13)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	
Inertia of the pulley	0.0067 [kgm ²]
Belt weight	0.34 [kg/m]
Carriage weight	25 [kg]
Base module (stroke=0)	M _{base} =36.5 [kg]
1,000 mm di profile	q=16.5 [kg]




F_x= Max belt strength

To calculate the module weight use the following formula: $M = M_{base} + q \cdot stroke_{max} / 1,000$ (stroke_{max} in mm)

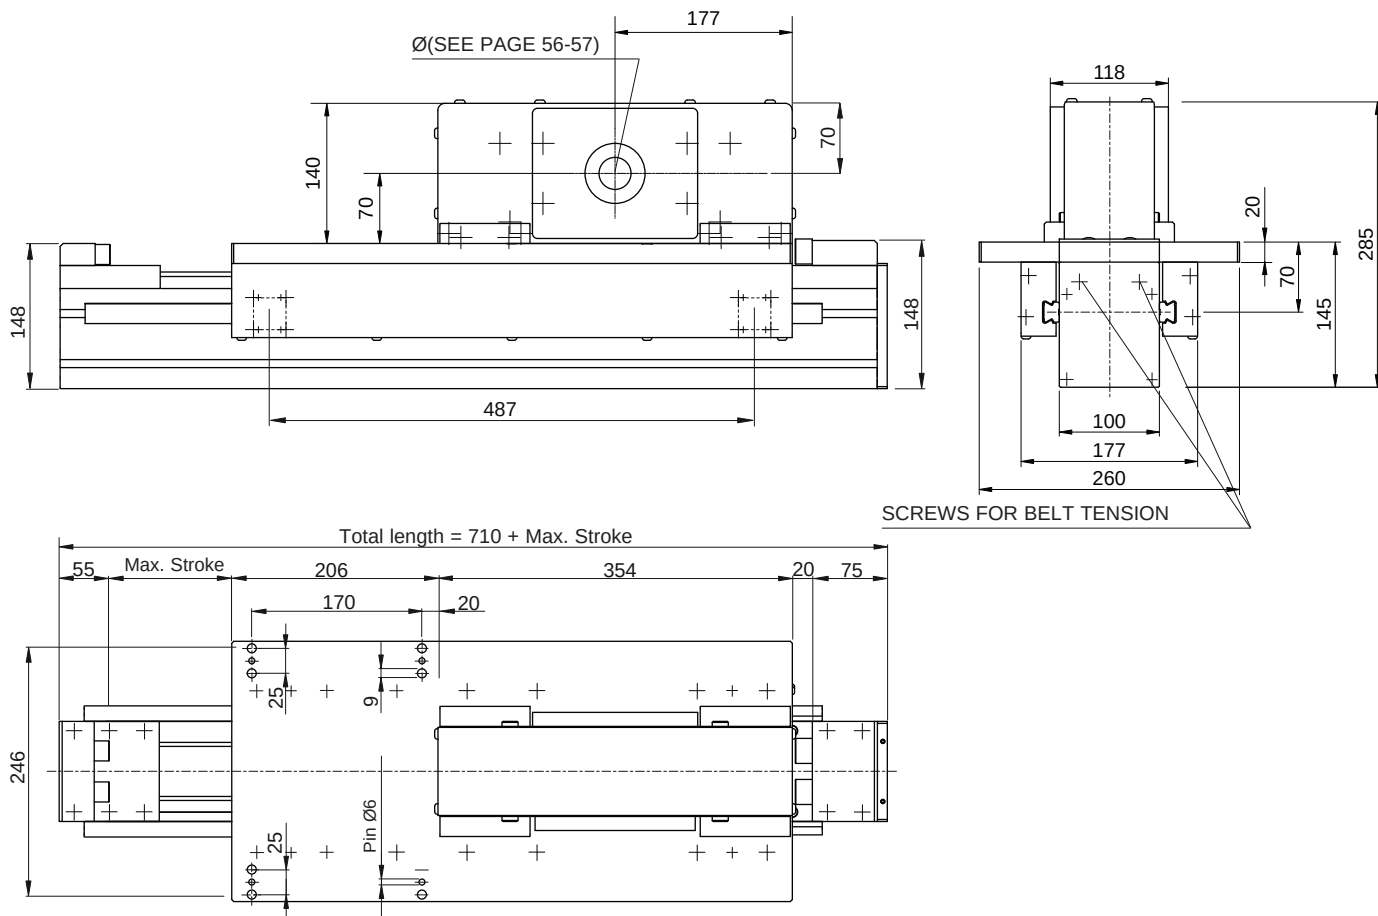

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCL 100	
Max. stroke	5,300	[mm]
Max. speed	4	[m/s]
Max. acceleration	25	[m/s ²]
Repeatability	± 0.1	[mm]



Fx= Max belt strength


Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCL 100	480	1,630	1,840	4,000	7,360	8,260

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Data	
Belt	50 ATL 10
Slide	4 caged ball roller slides 20
Load bearing profile	MA 1-5 (see page 13)
Pulley Ø	95.49 [mm]
Linear displacement per rev.	300 [mm]

Weights	
Inertia of the pulley	0.0067 [kgm ²]
Belt weight	0.34 [kg/m]
Carriage weight	24.4 [kg]
Base module (stroke=0)	M _{base} =36.6 [kg]
1,000 mm profile	q=15.2 [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot stroke_{max} / 1,000$ (stroke_{max} in mm)

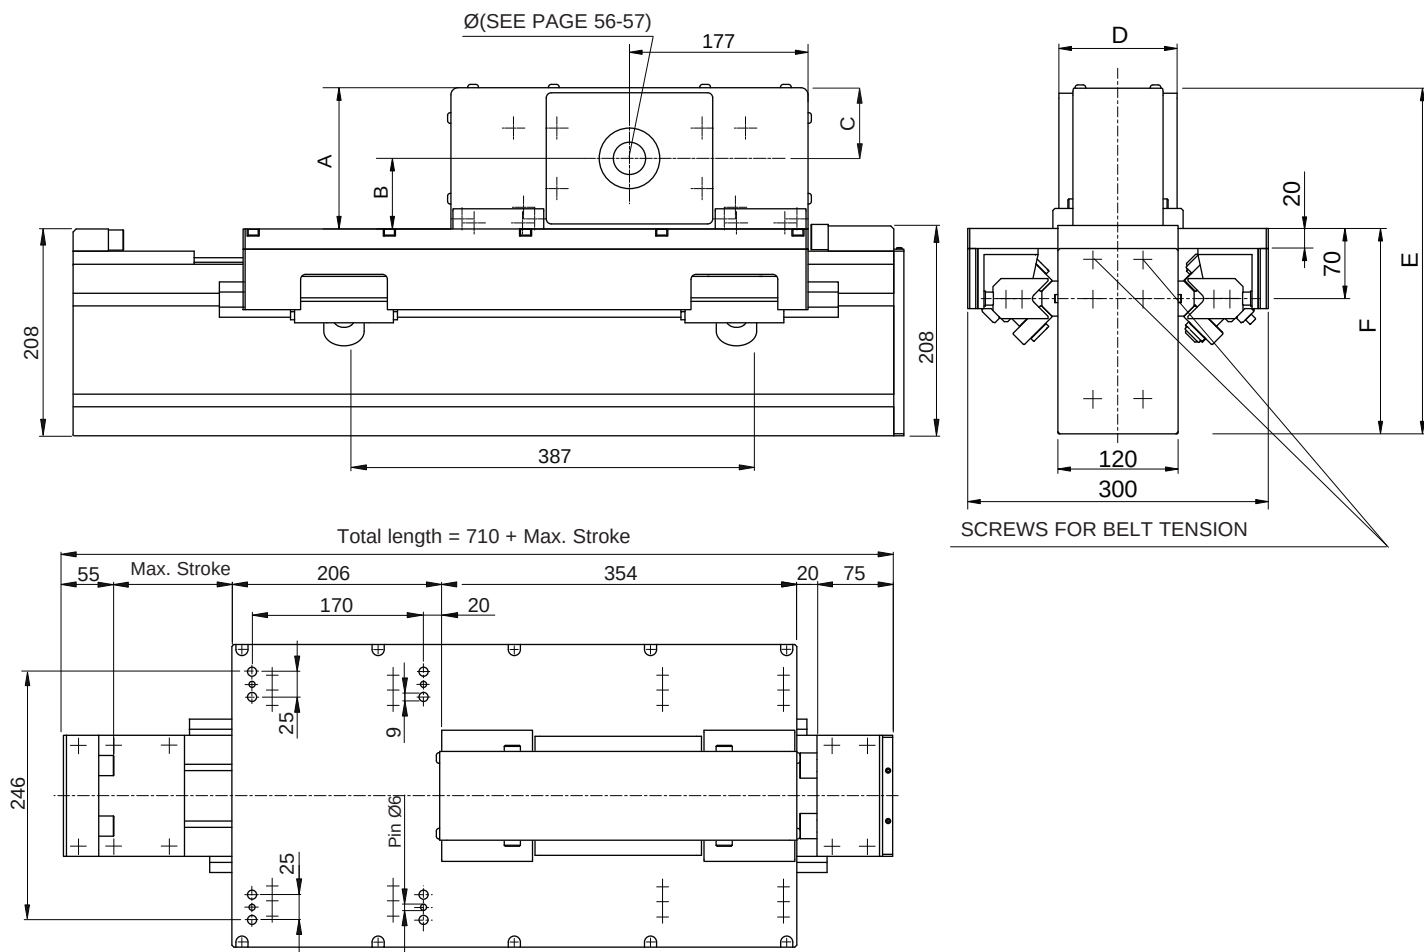

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances			ZCRQ 170 - ZCERQ 170	
Max. stroke	5,300	[mm]		
Max. speed	4	[m/s]		
Max. acceleration	25	[m/s ²]		
Repeatability	± 0.1	[mm]		


Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCRQ 170 440	440	1,485	1,485	4,000	7,620	7,620
ZCERQ 170 440	440	1,485	1,485	6,000	7,620	7,620

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept

Assembly positions and load direction, see page 10

Data	ZCRQ 170	ZCERQ 170
Belt	50 ATL 10	75 ATL 10
Slide	4 slides 2 roll. Ø 40	[mm]
Load bearing profile	Statyca	(see page 14)
Pulley Ø	95.49	[mm]
Linear displacement per rev. 300		[mm]


Weights	ZCRQ 170	ZCERQ 170
Inertia of the pulley	0.0067	0.010
Belt weight	0.34	0.51
Carriage weight	27.6	32
Base module (stroke=0)	M _{base} =47	M _{base} =51.4
1,000 mm profile	q=25	q=25



F_x= Max belt strength

Belt	A	B	C	D	E	F
50	140	70	70	118	345	205
75	164	82	82	143	379	215

To calculate the module weight use the following formula: $M = M_{base} + q \cdot stroke_{max} / 1,000$ (stroke_{max} in mm)

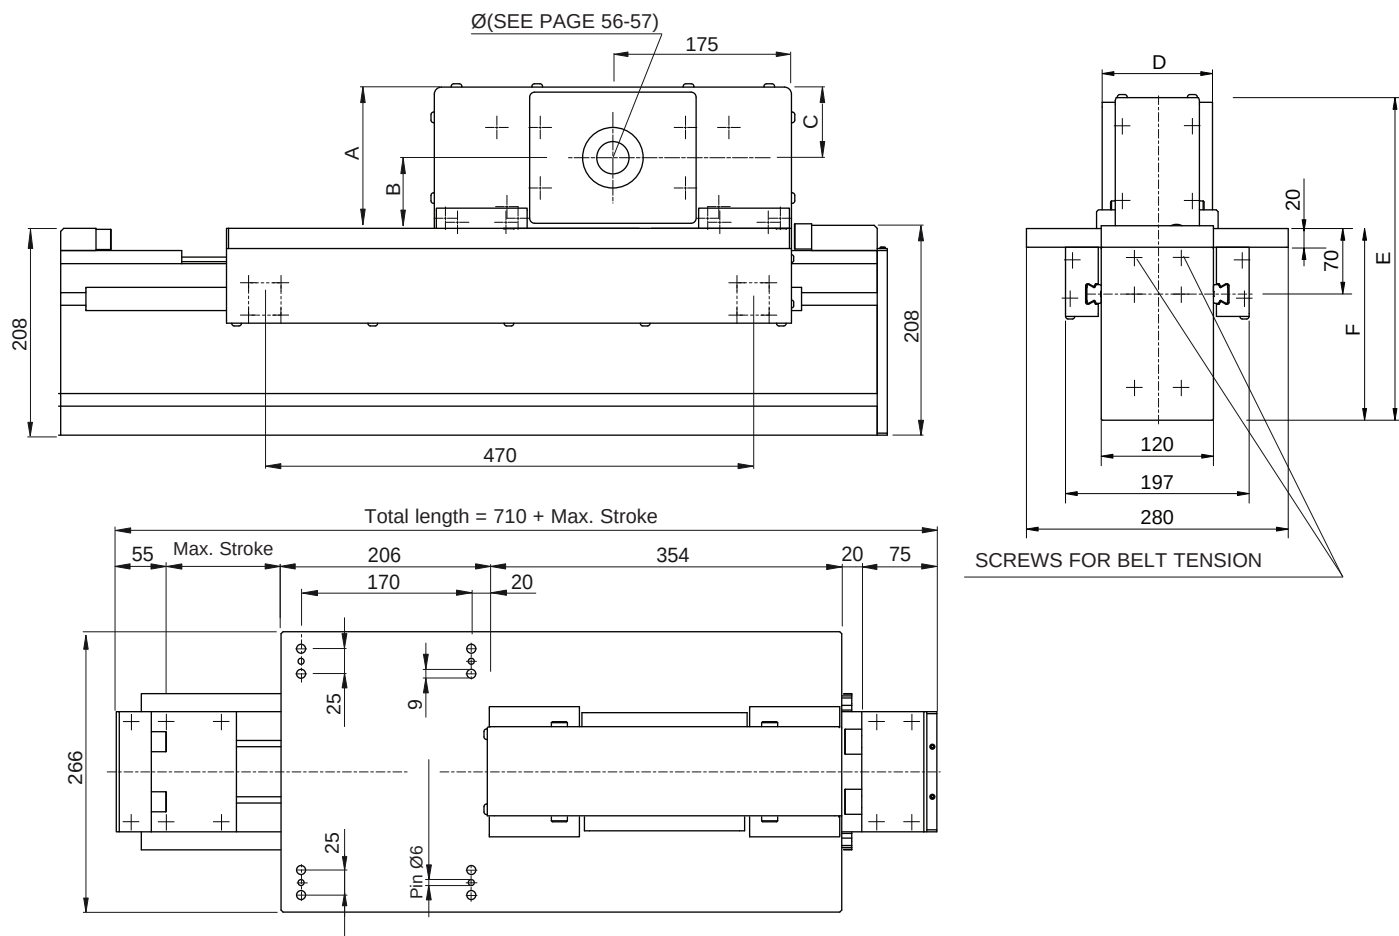

IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances	ZCL 170 - ZCEL 170
Max. stroke	5,300 [mm]
Max. speed	4 [m/s]
Max. acceleration	25 [m/s ²]
Repeatability	± 0.1 [mm]

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCL 170	810	2,940	4,560	4,000	10,400	12,000
ZCEL 170	810	2,940	4,560	6,000	10,400	12,000


The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery.
In case of peak forces acting together please ask the technical dept

Belt	A	B	C	D	E	F
50	140	70	70	118	345	205
75	164	82	82	143	379	215

Data	ZCL 170	ZCEL 170
Belt	50 ATL 10	75 ATL 10
Slide	4 caged ball roller slides 25	
Load bearing profile	Statyca	(see page 14)
Pulley Ø	95.49	[mm]
Linear displacement per rev. 300		[mm]

Weights	ZCL 170	ZCEL 170	
Inertia of the pulley	0.0067	0.010	[kgm ²]
Belt weight	0.34	0.51	[kg/m]
Carriage weight	27.6	31.6	[kg]
Base module (stroke=0)	M _{base} =46.2	M _{base} =50.2	[kg]
1,000 mm profile	q=24	q=24	[kg]


To calculate the module weight use the following formula: $M = M_{base} + q \cdot stroke_{max} / 1,000$ (stroke_{max} in mm)



F_x = Max belt strength

OMEGA BELT DRIVE V-SHAPED GUIDE RAILS AND ROLLER SLIDES

ML-56

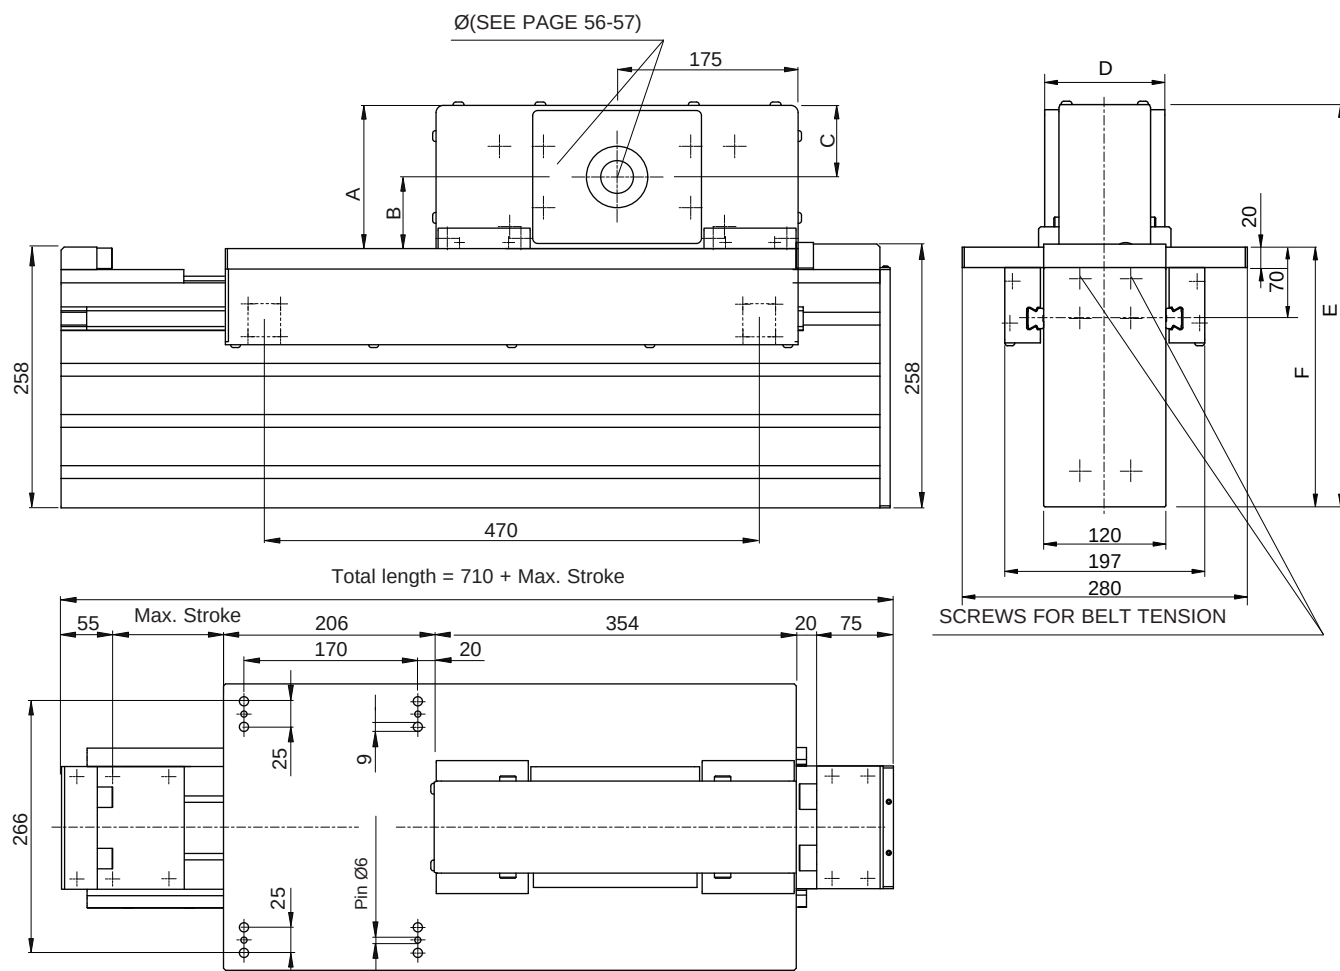


IMPORTANT: when pairing ZC... modules with TC... modules, please check the required Z axis stroke, as this could be limited by the size of the module plates sizes.

Performances			ZCL 220 - ZCEL 220
Max. stroke	11,305	[mm]	
Max. speed	4	[m/s]	
Max. acceleration	25	[m/s ²]	
Repeatability	± 0.1	[mm]	

Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZCL 220	810	2,940	4,560	4,000	10,400	12,000
ZCEL 220	810	2,940	4,560	6,000	10,400	12,000

The dynamic values shown do not refer to the max. theoretical load capacity. They include a safety coefficient for automated machinery. In case of peak forces acting together please ask the technical dept



F_x = Max belt strength

Belt	A	B	C	D	E	F
50	140	70	70	118	395	255
75	164	82	82	143	429	265

Data	ZCL 220	ZCEL 220
Belt	50 ATL 10	75 ATL 10
Slide	4 caged ball roller slides 25	
Load bearing profile	Logyca	(see page 14)
Pulley Ø	95.49	[mm]
Linear displacement per rev. 300		[mm]


Weights	ZCL 220	ZCEL 220	
Inertia of the pulley	0.0067	0.010	[kgm ²]
Belt weight	0.34	0.51	[kg/m]
Carriage weight	27.5	37.5	[kg]
Base module (stroke=0)	M _{base} =53	M _{base} =57	[kg]
1,000 mm profile	q=32.3	q=32.7	[kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{stroke}_{max} / 1,000$ (stroke_{max} in mm)

ZMCPLL 105 - ZMCLL 105

Patent pending

OMEGA BELT DRIVE SUITABLE FOR VERTICAL ASSEMBLY
LOAD COMPENSATION WITH INTEGRATED PNEUMATIC CYLINDER

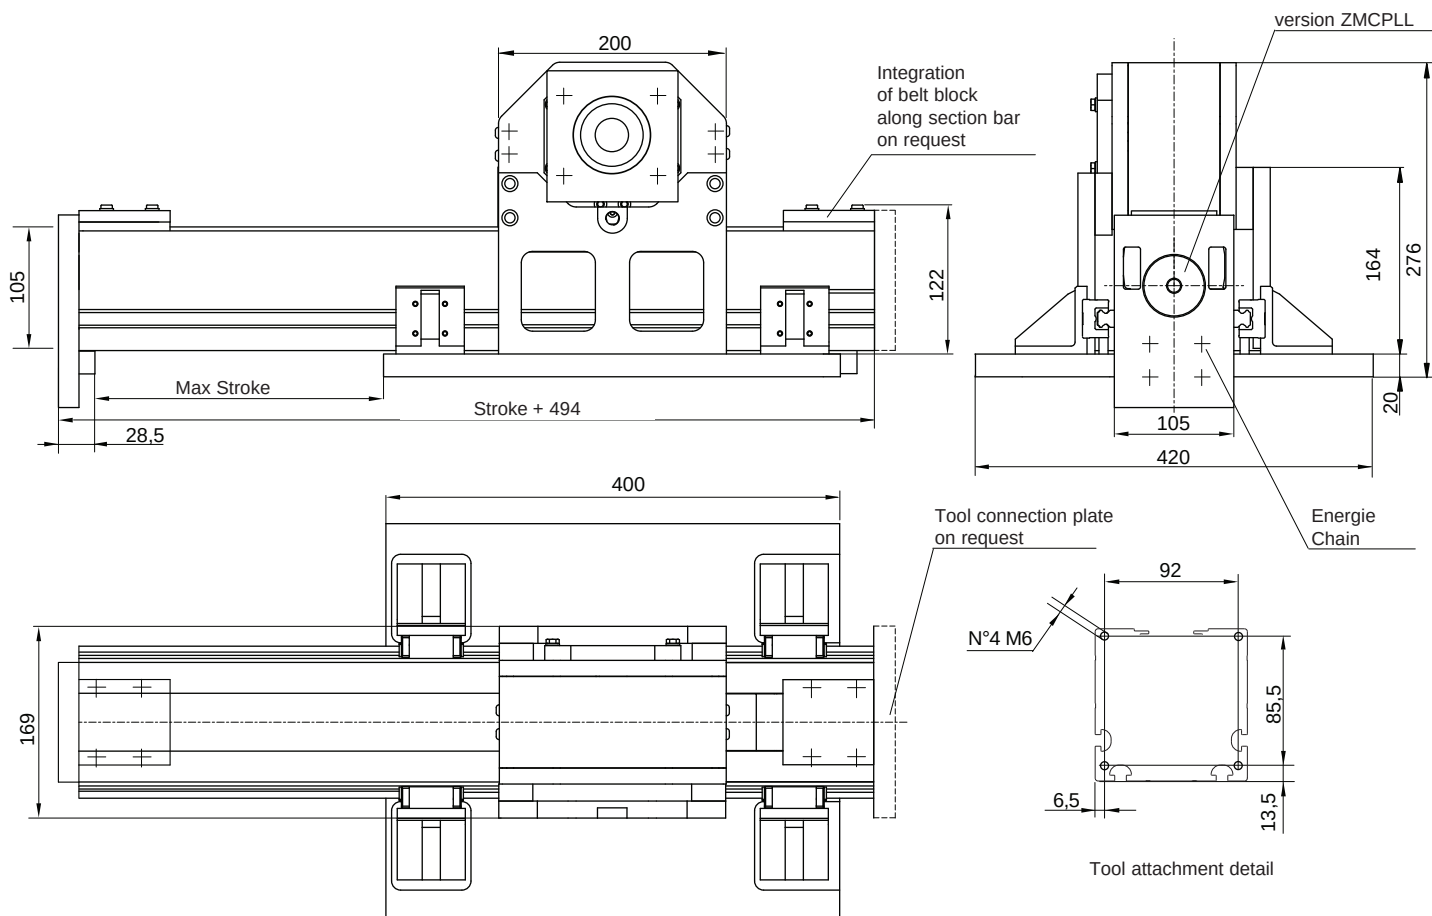


Performances		ZMCPLL 105
Integrated pneumatic cylinder	Ø 50	[mm]
Maximum cylinder stroke	2000	[mm]
Max Speed	3	[m/s]
Maximum acceleration	25	[m/s ²]
Repositioning precision	± 0,1	[mm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZMCPLL105	260	700	700	2.500	4.500	4.500

The dynamic values indicated do not correspond to maximum theoretical load capacities. They already take safety factors into account which are suitable for machinery in the automation sector. In the event of combined stress consult the technical support service.

Constructive data	
Belt	50 AT 10
Slide	4 ball slides size 15 [mm]
Profile	M105
Pulley Ø	92,3 [mm]
Linear displacement per revolution	290 [mm]


Weights	
Inertia of the pulley	- [kgm ²]
Belt weight	0,30 [kg/m]
Carriage weight	29 [kg]
Base Module (stroke=0)	M _{base} = 37 [kg]
1.000 profile	q=15 [kg]



F_x= Max belt strenght

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{Stroke}_{max} / 1.000$ (where Stroke_{max} is expressed in mm)

Patent pending

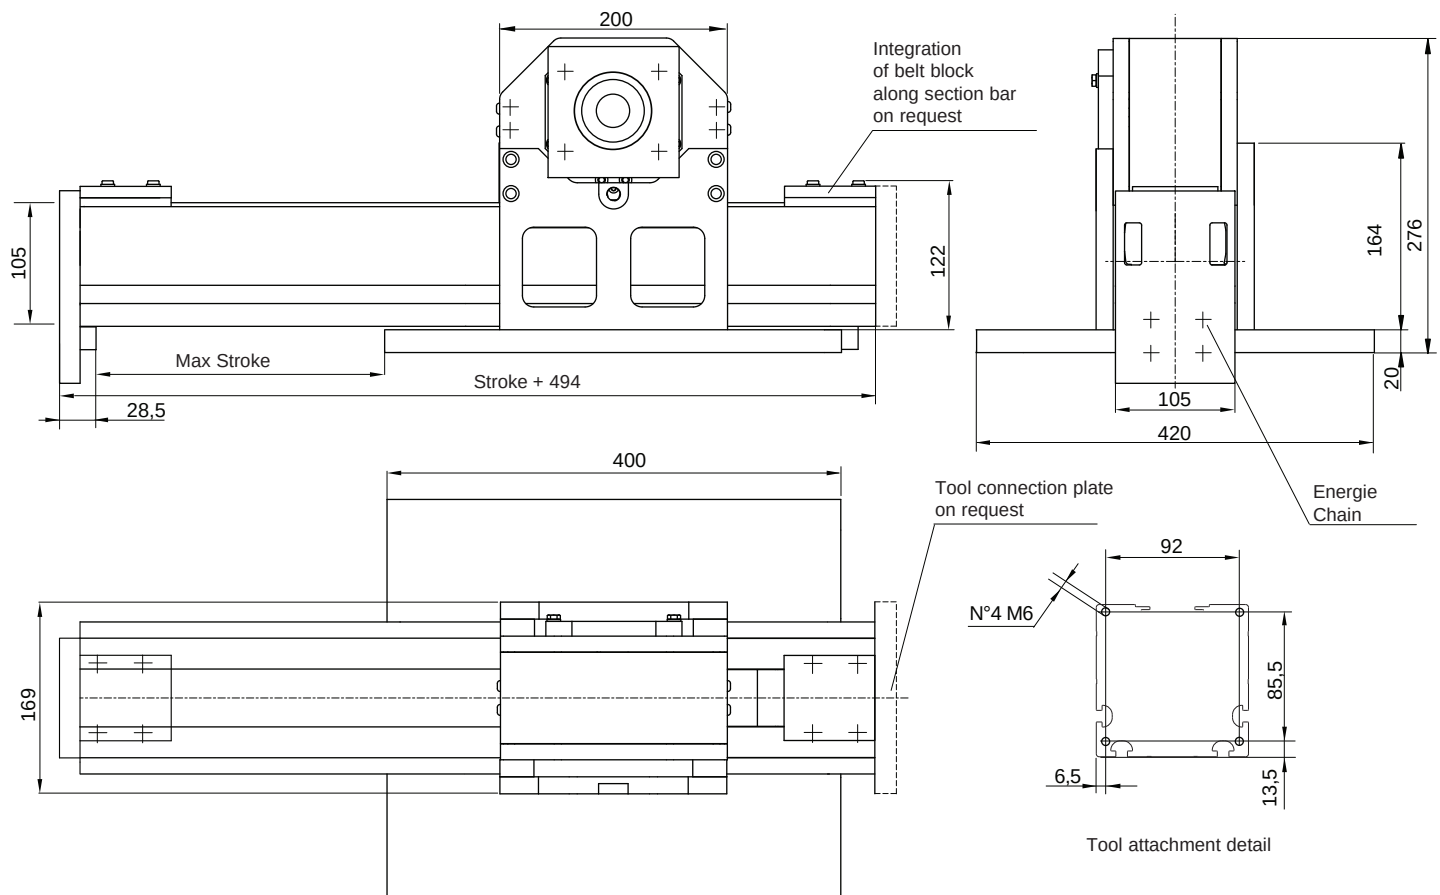


Performances		ZMCH 105
Max Speed	3	[m/s]
Max Acceleration	25	[m/s ²]
Repositioning accuracy	± 0,1	[mm]

Suggested working load conditions						
Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
ZMCH105	260	700	700	2.500	4.500	4.500

The dynamic values indicated do not correspond to maximum theoretical load capacities. They already take safety factors into account which are suitable for machinery in the automation sector. In the event of combined stress consult the technical support service.

Constructive data	
Belt	50 AT 10
Sliding	4 ball slides size 15 [mm]
Profile	M105
Pulley Ø	92,3 [mm]
Linear displacement per revolution	290 [mm]

Weights	
Inertia of the pulley	- [kgm ²]
Belt weight	0,30 [kg/m]
Carriage weight	29 [kg]
Base module (stroke=0)	M _{base} = 37 [kg]
1.000 mm profile	q=15 [kg]




F_x= Max belt strenght

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{Stroke}_{max} / 1.000$ (where Stroke_{max} is expressed in mm)

SERIE K MODULES GEAR MOTOR ASSEMBLY POSSIBLE FROM EACH SIDE

KCH 100/150/200

GEAR MOTOR ASSEMBLY POSSIBLE FROM EACH SIDE

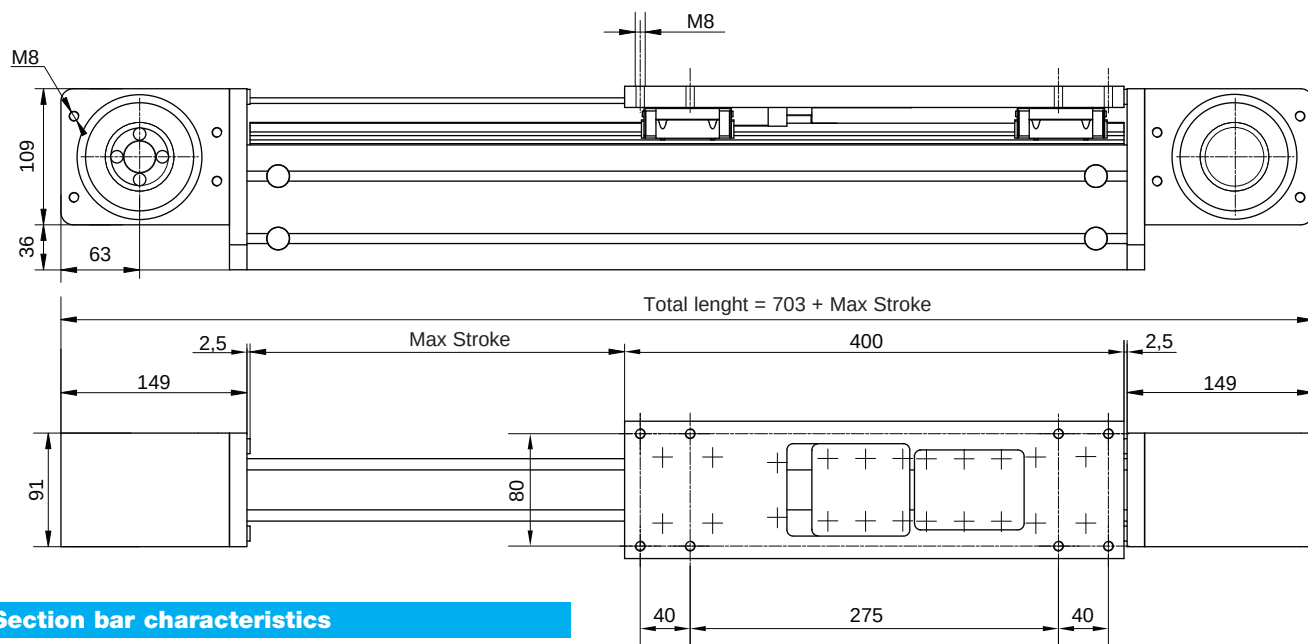

Section bar characteristics

Module	Mx	My	Weight [Kg]
KCH 100	203	54	4,6
KCH 150	30	60	7,1
KCH 200	40	80	9,0

Shrink disc interface

*Pulley hole (motor side = pipe side) Ø14 wrench 5x5 * [mm]

Interfaces with conical shrink discs and/or pulleys in steel are available on request. The heads are equal

Belt adjustment under load (does not require dismantling of equipment)

Performances

	KCH /...
Max stroke	5.600 [mm]
Max speed	4 [m/s]
Max acceleration	50 [m/s ²]
Repositioning accuracy	± 0,1* [mm]
Loadless torque	- [Nm]

*on request ± 0,05

Suggested working load conditions

Modulo	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
KCH/...	110	680	680	2.150	6.500	6.000

The dynamic values indicated do not correspond to maximum theoretical load capacities. They already take safety factors into account which are suitable for machinery in the automation sector. In the event of combined stress consult the technical support service.

Choice of beam depending on availability between supports.

Constructive data


Belt	32AT10
Sliding	4 ball slides [mm]
Profile	50 x ...
Pulley Ø	70,03 [mm]
Linear displacement per revolution	220 [mm]
Colour	natural anodisation

Weights


Inertia of the pulley	- [kgm ²]
Belt weight	0,38 [kg/m]
Carriage weight	2,2 [kg]
Base module (stroke=0)	M _{base} = 9 [kg]
1.000 mm profile	q=3 + profile [kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{Stroke}_{max} / 1.000$ (where Stroke_{max} is expressed in mm)

Sizes available

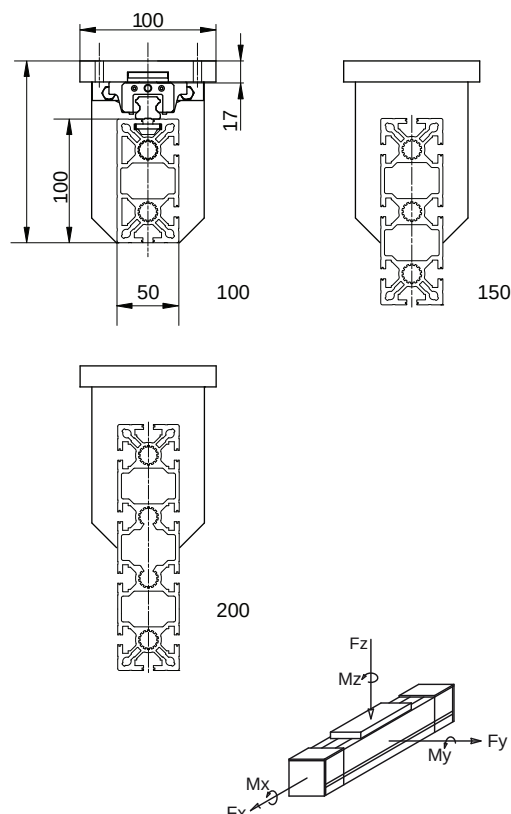

F_x = Max belt strenght

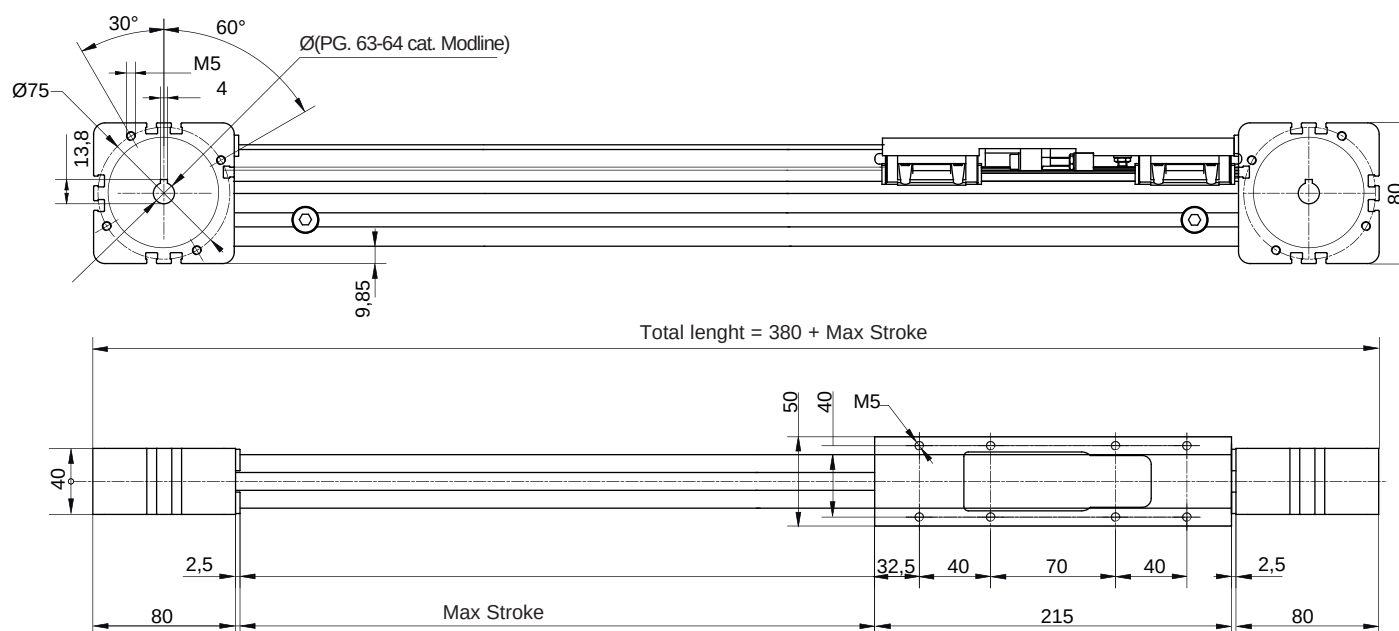

Shrink disc interface

Pulley hole (motor side = pipe side) Ø12 wrench 4x4*[mm]

The heads are equal

Belt adjustment under load (does not require dismantling of equipment)

*Interfaces with conical shrink discs and/or pulleys in steel are available on request

Performances

KCH 30



Max stroke	5.790	[mm]
Max speed	4	[m/s]
Max acceleration	50	[m/s ²]
Repositioning accuracy	± 0,1*	[mm]
Loadless torque	-	[Nm]

*on request $\pm 0,05$

Suggested working load conditions

Module	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_x [N]	F_y [N]	F_z [N]
KCH 30	10	96	96	340	900	900

The dynamic values indicated do not correspond to maximum theoretical load capacities. They already take safety factors into account which are suitable for machinery in the automation sector. In the event of combined stress consult the technical support service.

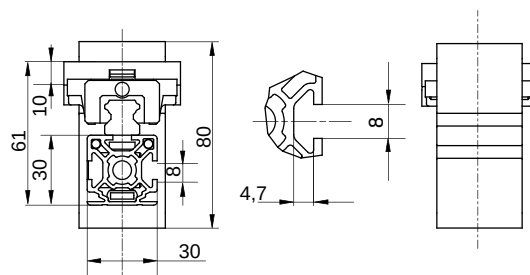
$$F_x = \text{Max belt strenght}$$


Constructive data

Belt	10 AT5
Sliding	2 ball slides size 15
Profile	30x30
Pulley Ø	50.93 [mm]
Linear displacement per revolution	160 [mm]

Weights

Inertia of the pulley	-	[kgm ²]
Belt weight	0,08	[kg/m]
Carriage weigh	0,8	[kg]
Base module (stroke=0)	M _{base} = 3	[kg]
1.000 mm profile	q = 2,8	[kg]

To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{Stroke}_{max} / 1.000$ (where Stroke_{max} is expressed in mm)

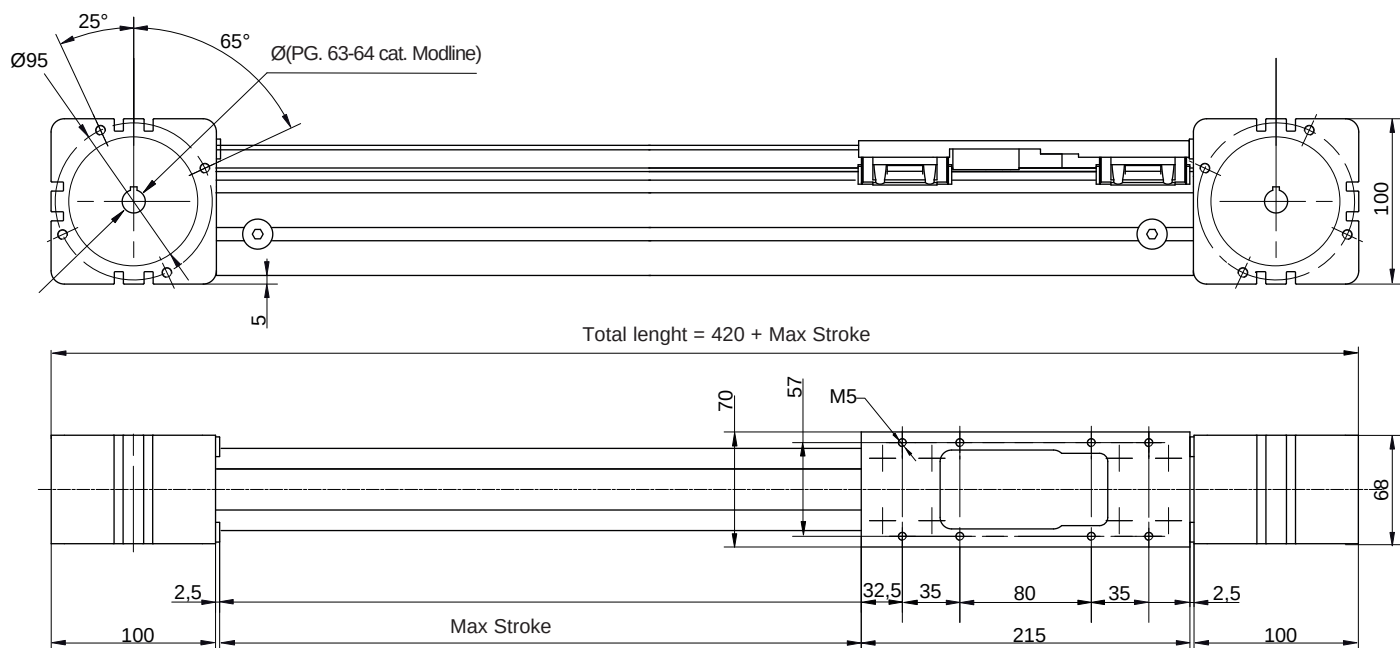

Shrink disc interface

Pulley hole (motor side = pipe side) Ø12 wrench 4x4*[mm]

The heads are equal

Belt adjustment under load (does not require dismantling of equipment)

*Interfaces with conical shrink discs and/or pulleys in steel are available on request

Performances

KCH 50

Max stroke	4.790	[mm]
Max speed	4	[m/s]
Max acceleration	50	[m/s ²]
Repositioning accuracy	± 0,1*	[mm]
Loadless torque	-	[Nm]

*on request ± 0,05



Suggested working load conditions

Module	M _x [Nm]	M _y [Nm]	M _z [Nm]	F _x [N]	F _y [N]	F _z [N]
KCH 50	16	96	96	850	1460	1460

The dynamic values indicated do not correspond to maximum theoretical load capacities. They already take safety factors into account which are suitable for machinery in the automation sector. In the event of combined stress consult the technical support service.

Constructive data

Belt	25AT5
Sliding	2 ball slides size 15
Profile	50x50
Pulley Ø	63,66 [mm]
Linear displacement per rotation	200 [mm]

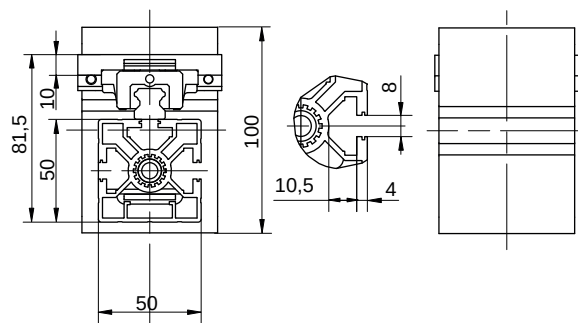

F_x= Max belt strenght

Weights

Inertia of the pulley	-	[kgm ²]
Belt weight	0,17	[kg/m]
Carriage weight	0,9	[kg]
Base module (stroke=0)	M _{base} = 6	[kg]
1.000 mm profile	q= 4,1	[kg]


To calculate the module weight use the following formula: $M = M_{base} + q \cdot \text{Stroke}_{max} / 1.000$ (where Stroke_{max} is expressed in mm)

Drive Pulley Bores for Shrink Discs

Modline

Registered model

The motor connection is pre-engineered directly on the drive head by means of a removable flange, but integrated in the actual head. The drive shaft and/or the driven shaft are locked into the pulley by shrink-discs. (The gearbox can be easily removed without disassembling the head). Please see page 10 to identify the desired motor side (left or right); page 56 for shrink-disc and flange diameter and page 11 for the order code setting. Non-standard diameters are available upon request.

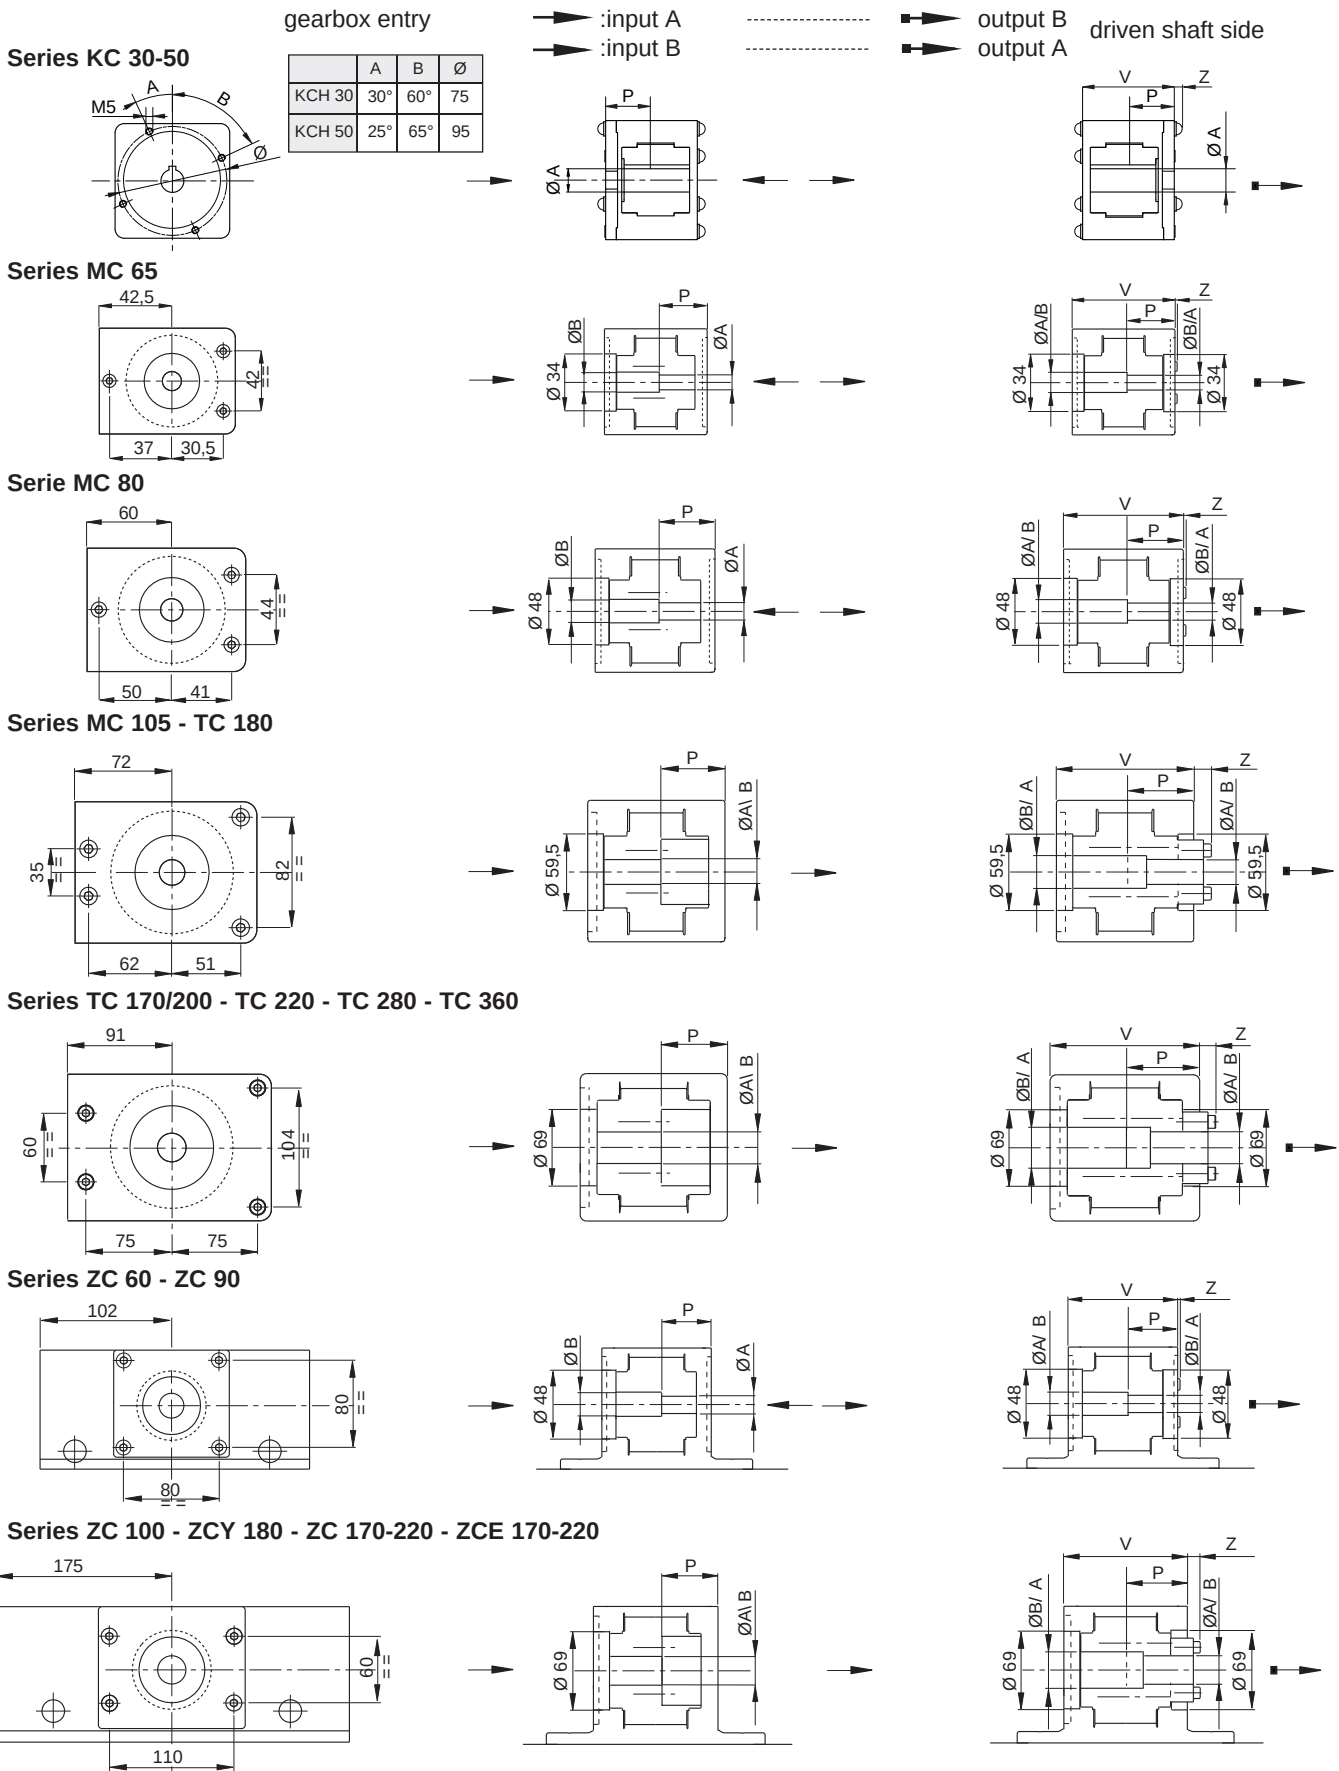

Module	A Ø [mm]	B Ø [mm]	V [mm]	P [mm]	Z [mm]
KCH30 - KCH50	12H7		40	34	4
	14H7		68	34	4
MC 65 - TC 100	12H7		67	34	0
		14H7	67	34	0
MC 80	16H7		80	52.4	1
		19H7	80	49.4	1
		20H7	80	49.4	1
MC 105 - TC 180	19H7		105	49	13.5
TC 170 - TC 200		25H7	105	51	8
	25H7		117	54.5	12.5
		32H7	117	57.5	7
TC 220 - TC 280 - TC 360	25H7		142	79.5	12.5
		32H7	142	82.5	7
		40H7	142	82.5	7
ZC 60 - ZC 90	16H7		100	62.4	0
		19H7	100	62.4	0
		20H7	100	62.4	0
ZC 100 - ZCY 180	25H7		108	48.5	11.5
		32H7	108	52.5	6
ZC 170 - 220	25H7		108	48.5	11.5
		32H7	108	52.5	6
		40H7	108	52.5	6
ZCE 170 - 220	25H7		143	65	12
		32H7	143	95	12
		40H7	143	95	12

Phosphating of drive and driven pulleys.


Adapter Flanges

Standard machining for planetary gearboxes - MP or MPTR, LP, EP series.

Machining is performed directly on the removable flange in a symmetric position, suitable for both sides.

Ex. module: MC 105

Ex. module: TC 280

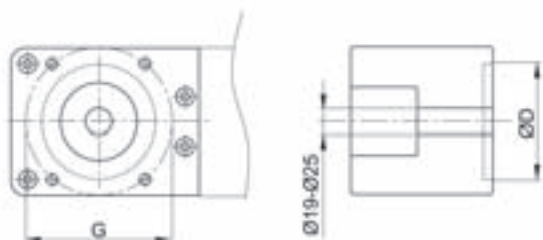

Drilled flange: code E
Blind flange: code X

Linear module	Gearbox code	Size		
Series		D	Ø	G
MC 65	LP 050	35	12	44
KC 30-50	EP55	32	12	40
	MP053	32	12	40
MC 80-105 - ZC 60	MPTR080	50	19	65
ZC 90	LP070	52	16	62
	EP75 AA	40	14	52
MC 105 - TC-ZC 100	MPTR105	70	25	85
MC 105 - TC 180	LP090	68	22	80
	EP90 TT	50	19	65
TC 170-360	MPTR130	80	32	110
	LP120	90	32	108
	EP120 TT	70	25	85
ZC 170-220				

Connecting shafts for parallel modules

Modline

We can supply standard hollow shaft connections, according to your application requirements.

Please specify the type of module to be connected, together with speed, "L" centre-distance, working and peak torques, accuracy.

Some simplified solutions with solid shafts are available for low-speed applications and with "L" of up to 2,000 mm.


If high-speeds and/or "L" of more than 2,000 mm are needed, please ask our technical dept. for the shaft scaling.

The complete kit includes all the components needed to make the connection: tube, shrink-discs, shaft crop ends for connection between pulleys and shrink-discs, any supports.


Tube material: 6060 aluminium alloy

The customer is responsible for ensuring compliance with accident prevention rules in relation to all rotating parts.



Type 1 - Elastic joint connecting shafts, normally suitable for low-speeds

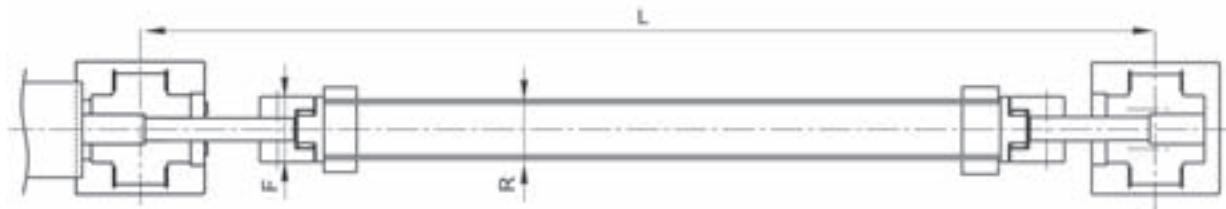

Type 2 - Stainless steel blade joint connecting shafts, suitable for backlash-free transmissions

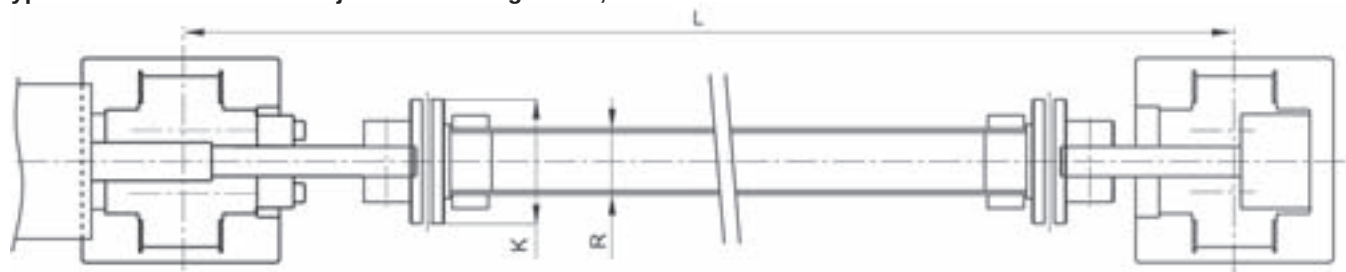

Type 3 - Stainless steel blade joint connecting shafts and pedestal bearings, suitable for backlash-free transmissions

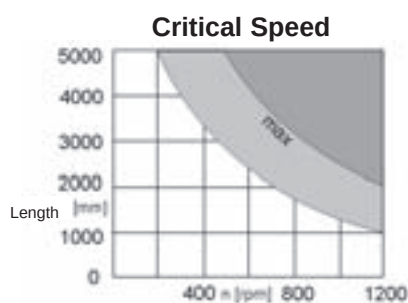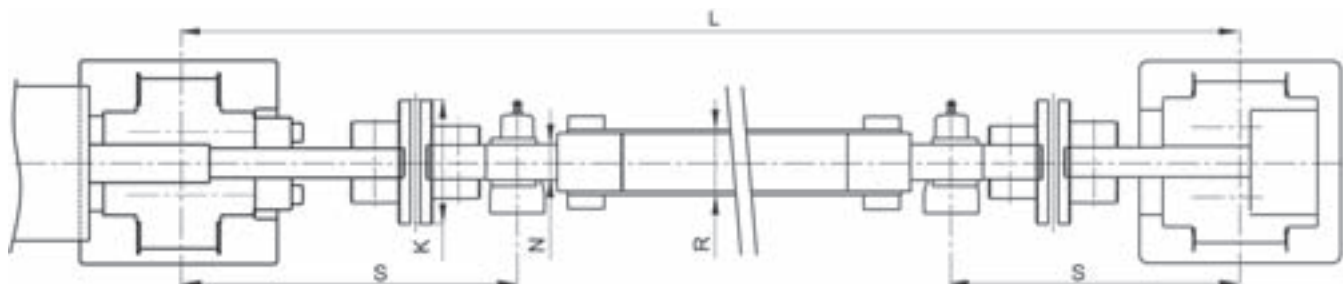

R(*)	K	F	N	S	Lmax	MTwork [Nm]	Mom.Inertia. [Kgm²]	Type 1: Code/L	Type 2: Code/L	Type 3: Code/L
40	67	55	20	200	6,200	20	$0.0028 + 0.46 \times L. \times 10^{-6}$	436.0948	436.0957	436.0965
50	81	65	25	235	6,300	35	$0.0092 + 0.66 \times L. \times 10^{-6}$	436.0949	436.0958	436.0966
50	93	80	25	235	6,300	70	$0.0161 + 1.34 \times L. \times 10^{-6}$	436.0951	436.0971	436.0974
70	104	95	25	235	6,400	100	$0.0293 + 2.93 \times L. \times 10^{-6}$	436.0952	436.0960	436.0968
80	126	120	25	250	6,400	190	$0.0793 + 4.5 \times L. \times 10^{-6}$	436.0955	436.0963	436.0984
90	143	-	-	-	6,500	300	$0.1456 + 6.53 \times L. \times 10^{-6}$	-	436.0986	436.0987
110	185	-	-	-	6,000	420	$0.3499 + 12.3 \times L. \times 10^{-6}$	436.0144	436.0145	436.0146

The S value can vary by $\pm 20\%$, Lmax by $\pm 3\%$, according to the chosen type. Please contact our technical dept.

Spare rollers with pins

Make sure that all the components are locked in place with the appropriate screws. The recommended tightening torque for pin locking screws and nuts is 50 Nm.



Max. load factors for hardened and tempered guides




Roller	Cw [N]	C0w[N]	Fr amm.[N]	V max.
Ø30	5,000	3,000	1,350	7 m/s
Ø40	9,800	6,200	2,600	7 m/s
Ø52	15,800	10,500	4,400	6 m/s
Ø62	21,100	14,500	5,600	5 m/s

Max. load factors for hardened guides

Roller	Cw [N]	C0w[N]	Fr amm.[N]	V max.
Ø30	5,000	3,000	400	2 m/s
Ø40	9,800	6,200	800	13 m/s
Ø52	15,800	10,500	1,400	2.5 m/s
Ø62	21,100	14,500	1,900	2 m/s

Spare roller with pin	Weight [kg]	Code
Ø30 Concentric	0.02	406.0056
Ø40 Concentric	0.22	205.0464
Ø40 Eccentric (± 0.75 mm)	0.25	205.0463
Ø52 Concentric	0.4	205.0163
Ø62 Concentric	0.55	205.0165



Mounting brackets

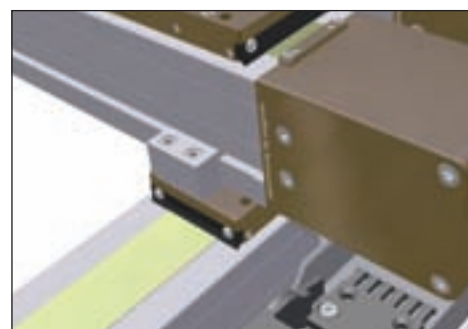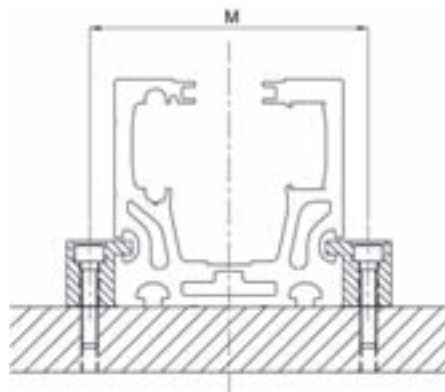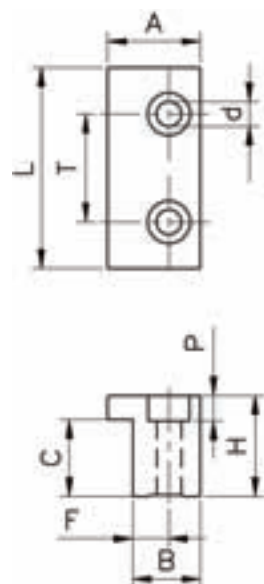

Material: aluminium alloy 6082

Module type	bxh	A	L	T	d	H	P	C	F	B	M	Code
KC 30	30x30	25	25	-	6.7	17	6.8	10.6	10	18	40	415.1105
MC 65	67x65	25	50	25	6.7	20	6.8	13.5	10	18	87	415.0388
MC 80	80x80	25	50	25	6.7	25	6.8	18.6	10	18	100	415.0760
KC 50, TC-ZC 100		25	50	25	6.7	27	6.8	20.6	10	18	120	415.0764
MC 105	105x105	30	50	25	9	30	9.5	23.6	12	22	129	415.0761
TC 180	180x90	30	50	25	9	25	9.5	18	12	25	204	415.0773
TC 170	120x170										198	
TC 200	120x200	30	90	50	11	40	11	28.3	14	25	228	415.0762
TC 220	120x220										248	
TC 280	170x280	30	90	50	11	20	11	11.3	14	25	308	415.0763
TC 280Vert. 280x170		30	90	50	11	20	11	13.5	14	25	198	915.1174

Assembly brackets

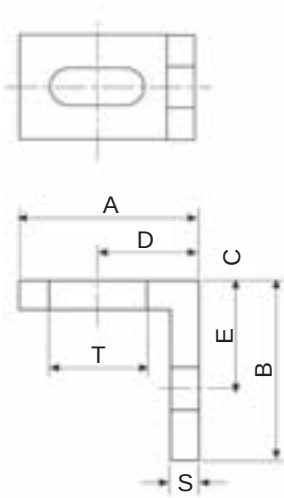


Material: natural, anodised anticorrosional alloy.

Thread							Code		
A	B	C	D	E	S	Txt	ØM	Ø	M
45	45	20	25	25	5	20x6.5	6	A30-76	A 30-86
35	25	20	19	15	5	20x6.5	4	A30-54	A 30-64
35	25	20	19	15	5	20x6.5	5	A30-55	A 30-65
35	25	20	19	15	5	20x6.5	6	A30-56	A 30-66
25	25	15	14	15	4	13.5x5.5	3	B30-53	B 30-63
25	25	14	14	15	4	13.5x5.5	4	B30-54	B 30-64
25	25	15	14	15	4	13.5x5.5	5	B30-55	B 30-65
25	25	15	14	15	4	13.5x5.5	6	B30-56	B 30-66

Suitable for all the modules

Filler strips




PVC filler strips, grey or black L=5,000 - 6,000 mm
for any longitudinal 8 mm slot

Suitable for series: **KC 50, MC 80-105, ZC 60-90-100-170, TC 100-180**

Color	Code A /Length
grey	Cod.A39-25/5000
black	Cod.A39-26/5000
orange (on request)	Cod.A39-25/6000 A

T Bolts

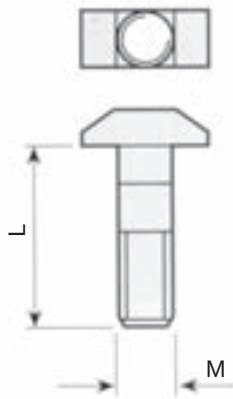

Assembly in longitudinal slots. Material: galvanised steel. Can be inserted through the profile slot.

Code A: KC 50, MC 80-105, ZC 60-90-100-170, TC 100-180
Code B: KC 30, MC 65

M x L	Code B	M x L	Code A
M 6x15	B35-15	M8x20	A35-20
M 6x20	B35-20	M8x25	A35-20
M 6x30	B35-30	M8x30	A35-30
M 6x40	B35-40	M8x40	A35-40
		M8x60	A35-60

Threaded inserts (suitable for the ZC series)



Suitable for ZC series

Material: galvanised steel

Ext. thread	Int. a	L	Key	Code
M16	M 6	25	6	A33-26
M16	M 8	25	8	A33-28
M16	M 10	25	10	A33-20
M20	M 6	25	6	207.1892
M20	M 8	25	8	207.1893
M20	M 10	25	10	207.1894
M20	M 12	25	12	207.2288

Front insertable nuts and plates

Spring nut




Plate suitable for every kind of module (8 mm slot).
Material: nut in galvanised steel welded to the harmonic steel spring. The B series can also be inserted through the slot.

Code A: KC 50, MC 80-105, ZC 60-90-100-170, TC 100-180
Code B: KC 30, MC 65


Single plate	Code A	Code B
M5	A32-55	B32-55
M6	A32-65	B32-65
M8	A32-85	B32-85

Double plate	Code A	Code B
M6	A32-67	B32-67

Size					
Base Module	D	H	L	L1	T
MC 105, ZC 100	14	7.8	20	40	30
MC 80	11	4.1	20	40	30



Simple nut




Material: galvanised steel.
Insert through the end of the profile.
Suitable for series:

KC 50, MC 80-105, ZC 60-90-100-170, TC 100-180

Thread	Code
M5	209.2431
M6	209.2432
M8	209.2433

Front insertable spring nut





Material: galvanised steel, harmonic steel spring.
To be inserted through the slot.
Suitable for series:

KC 30, MC 65

Thread	Code B
M3	BD31-30
M4	BD31-40
M5	BD31-50
M6	BD31-60

Simple Nut


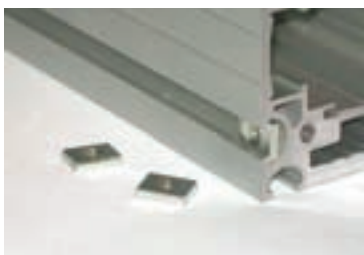


Materiale: galvanised steel.
To be inserted through the slot. Suitable for series:

KC 30, MC 65

Thread	Code B
M4	B32.40
M5	B32.50
M6	B32.60

Flat nut

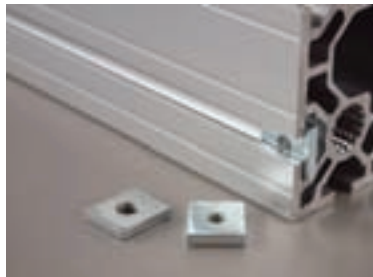

Material: galvanised steel.
Insert through the end of the profile.
Retaining spring upon request.

TC-ZC 100, TC 180, ZCY 180


Thread	Code
M4	A32-40
M5	A32-50
M6	A32-60
M8	A32-80
Molla	211.1061

Semi-rounded threaded inserts with spring

Threaded plate for base profile 45, 50 and 60. Material: galvanised steel.
Important: to be inserted through the longitudinal slots before assembling.


Suitable for series:

TC-ZC 100, ZCY 180, TC 170-180-200-220-360, ZC 170-220



Thread	Code 18x18	Code 20x20
M4	209.0031	209.0023
M5	209.0032	209.0019
M6	209.0033	209.1202
M8	209.0034	209.0467

Plastic compound spring for vertical positioning of insert.



Spring	Code
Suitable for all inserts 18x18	101.0732



Alignment nuts

Nuts for steel guide rails

Material: galvanised steel.



Code 209.1855

Alignment nuts.
V-shaped guide rail: 35x16
Profile with slot. 12.5 mm.
Series: TC 170-200-
220-280-360 e ZC 170-220

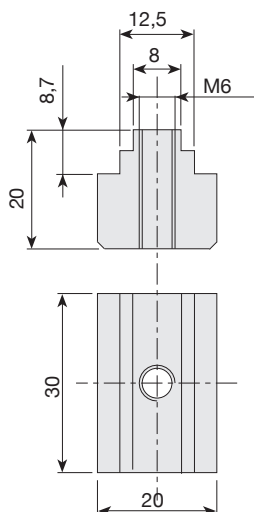

Code 209.0298


Alignment nuts.
V-shaped guide rail: 35x16
Profile with slot 8 mm.
Series: TC-ZC 100, TC 180

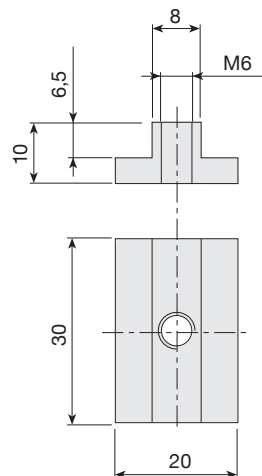

Alignment nut for slot 12.5 mm



Material: galvanised steel. Suitable for series:
TC 170-200-280-360 and ZC 170-220

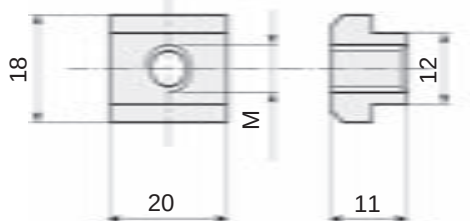


Thread	Code
M5	215.1768
M6	215.1769
M8	215.1770
M10	215.2124

Alignment nut for slot 12.5 mm front insertable




Material: galvanised steel. Suitable for series:
TC 170-200-280-360 and ZC 170-220

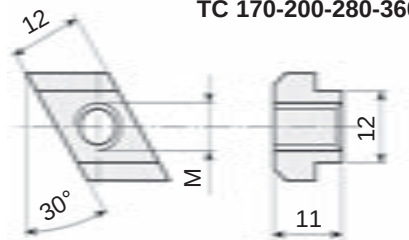

Thread	Code
M5	215.1771
M6	215.1772
M8	215.1773
M10	215.2125

Threaded nuts and plates




M12 (CH19) hexagonal-head screws can be used as stud bolts
in profiles with 12.5 mm slots.

Material: galvanised steel. Suitable for series:
TC 170-200-220-280-360 and ZC 170-220


Thread	Type	L	Code
M10	1-hole plate	40	215.0477
M12	1-hole plate	40	209.1281
M10	1-hole plate	20	209.1277
M10	2-holes plate*	80	209.1776
M10	3-holes plate*	150	209.1777
M10	4-holes plate*	200	209.1778
M10	5-holes plate*	250	209.1779
M10	6-holes plate*	300	209.1780
M10	7-holes plate*	350	209.1781

* Hole centre-distance: 50 mm.

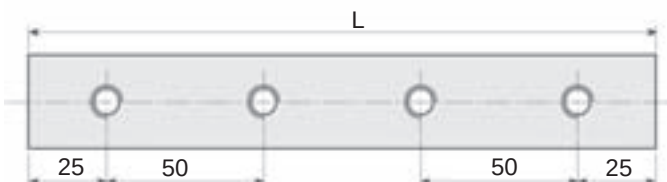



Mechanical and inductive micro-switches on MC series.

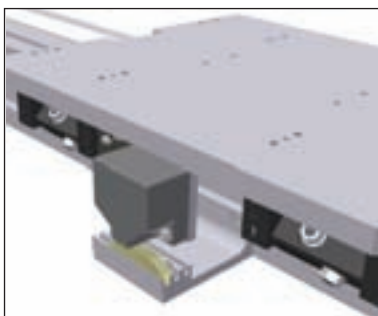

Multi-channel micro-switch on TC series.



Mechanical and inductive micro-switches on MC series.

Micro-switches and brackets are supplied according to the needs of the application.


We can also supply cams and cam-holders for mechanical micro-switches in accordance with DIN standards.

Cams and cam-holders for micro-switches

Long cams

Cams in accordance with DIN 69639 except when marked "#".

Material: steel with hardened and ground surface.

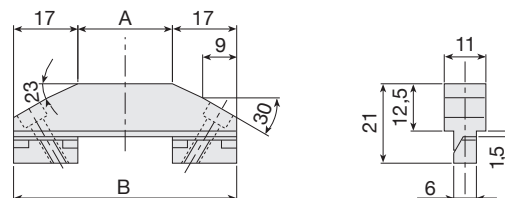


A	B	Code
25	59	211.2132
40	74	211.2133
63	97	211.2134
80 #	114	211.2135
100	134	211.2136

Short cams

Cams in accordance with DIN 69639

Material: steel with hardened and ground surface.


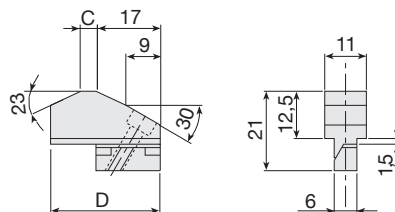


C	D	Code
0	25	211.2128
4	29	211.2129
10	35	211.2130
16	41	211.2131

Cam-holder guides

Cams in accordance with DIN 6963

Materiale: lega di alluminio 6060 anodizzato

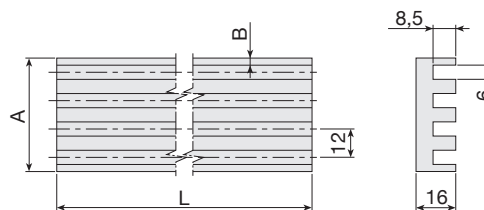

n°	B	A	L	Code
3	3	36	2,000	202.2138
4	5.5	53	3,000	202.2139
6	5.5	77	3,000	202.2140
8	5.5	101	3,000	202.2141


Special Options

Reader system with magnetic scale and sensor

The magnetic scale is applied to the body of the module using a supporting and protective profile.



Precision of between ± 0.015 and ± 0.05 mm

Max speed = $4 \div 10$ m/s (depending on the type)

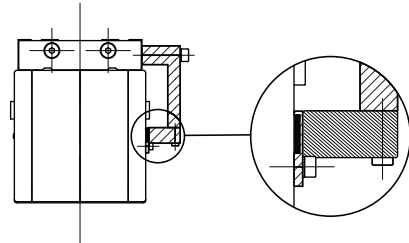

Twin drive head


Version with drive head on both sides.

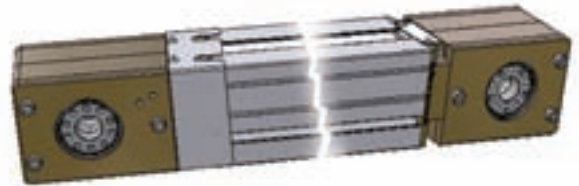

Precision profile machining




Profiles can be machined along their entire length, to provide the required precision or according to application specifications.

Example: for linear motors.

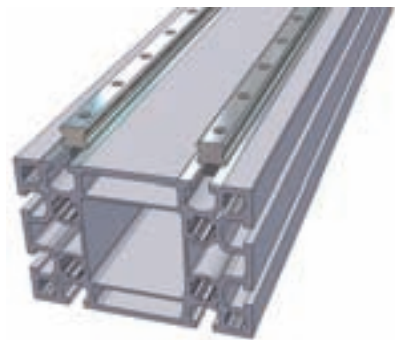

Rotatable load-bearing profile to fully exploit the moment of inertia



The load-bearing profile can be rotated in order to change the overall dimensions, or to fully exploit the moment of inertia.

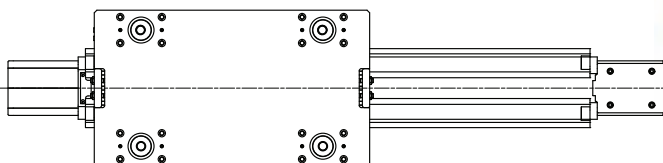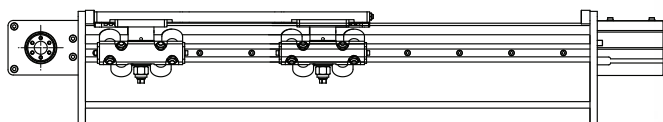

Belt protection for series MC 65 - 80 - 105


Guard system consisting of a magnetic stainless steel foil to protect the belt from dust and external agents (code: **LI**), which is attached to the profile.

NB: Avoid the use of a metallic band in the presence of ferrous filings. Optional.

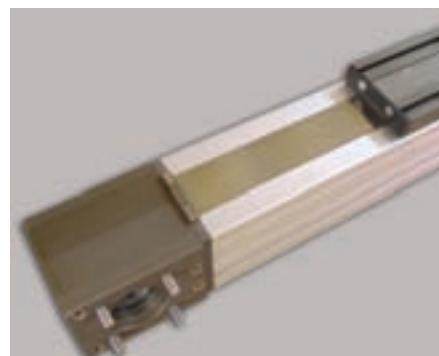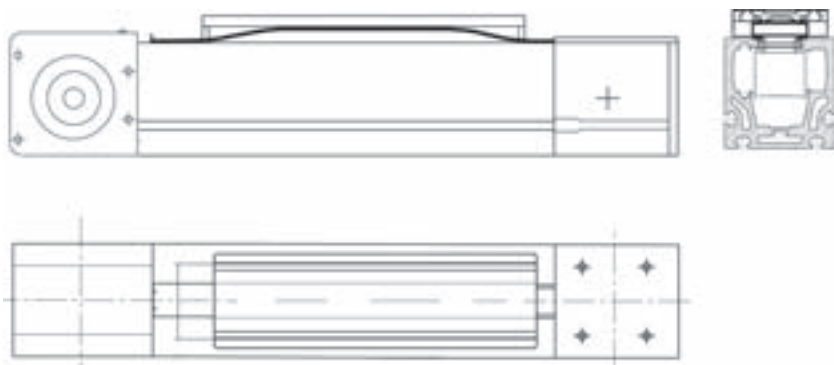

TC series of linear modules with pulley axis turned at 90°


In some applications which involve the use of high speeds and accelerations, the assembly of linear units having a vertical pulley axis and a centre-distance of more than 4 m may force the toothed belt and result in the need for premature maintenance. In this case we suggest you mount the pulleys and the belt in a horizontal position. The modification as shown in the figure below can be requested for the MODLINE TCS series. Optional.

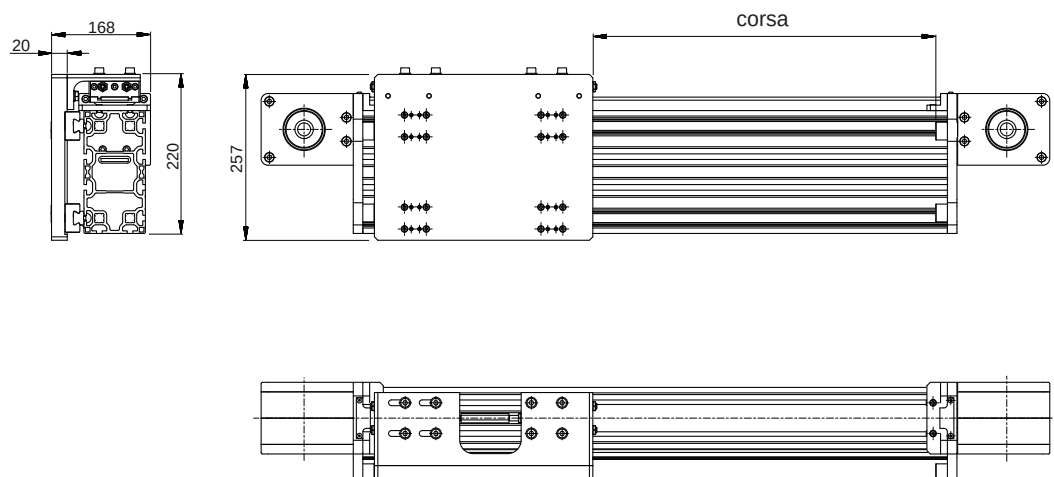

TC multi-carriage linear modules with intermediate belt transmission

Example of horizontal transfer with integrated belt and transmission pulley support, in an intermediate position, all incorporated inside the profile. **(Registered design)**

Special feature: note the compensating cylinders and the horizontal cylinder for the different travel of carriage no. 3.

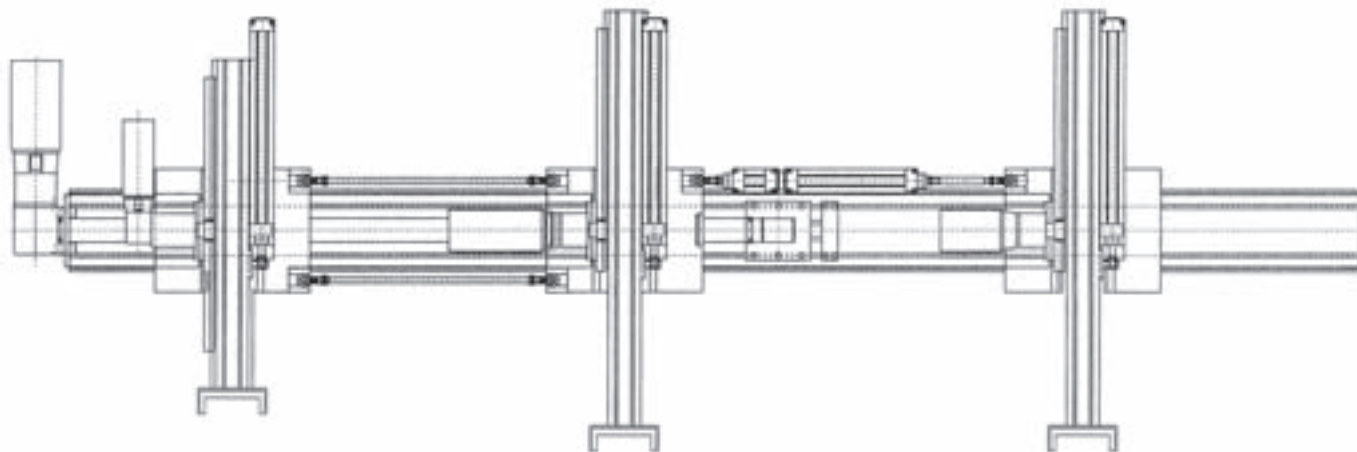


Anti-drop safety device with pneumatic brake system

Anti-drop safety devices, available in a range of sizes, are supplied according to the type of application. For instance, they can act as a mechanical stop to block the free-falling load at any stroke point, or as a lock in static conditions at any position. Two-way blocking occurs following an unexpected pressure drop. A mechanical safety release system is available upon request (patented). Catalogue available upon request. The kit includes: braking device and rod with relative supports, micro-switch and solenoid valve.

Operating pressure 3-6 Bar.


With no pressure = locked.

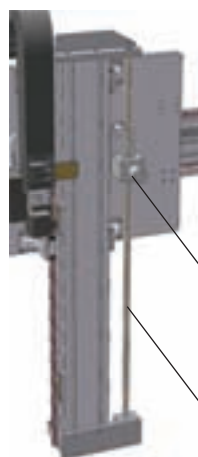

Type A
Static

Pneumatic
braking device

Hardened
chrome-plated
cylindrical rod

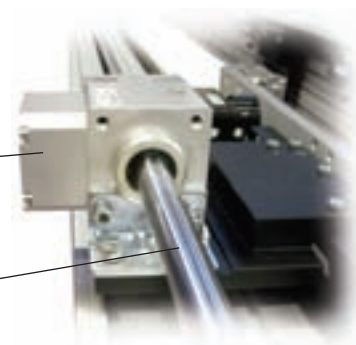

Type B
Dynamic,
for free-falling
loading

1- Static rod blocking device

Type	Code	Rod blocking force [N]	Stroke [mm]
A	236.0018	/ 1,200	/ ...
A	236.0018	/ 1,900	/ ...
A	236.0018	/ 3,000	/ ...
A	236.0018	/ 5,400	/ ...
A	236.0018	/ 7,500	/ ...
A	236.0018	/ 12,000	/ ...

Emergency brake for free-falling load.

1- Dynamic rod blocking device


Type	Code	Rod blocking force [N]	Stroke [mm]
B	236.0019	/ 3,000	/ ...
B	236.0019	/ 5,400	/ ...
B	236.0019	/ 7,500	/ ...
B	236.0019	/ 12,000	/ ...

Safety lock-pin (stopper cylinders)

Lock-pin devices, available in two sizes, suitable to block the vertical axes in the safety position during horizontal movements. (e.g.: maintenance). The safety lock-pins are provided with a through rod.

Select the size according to the load. The kit includes: drilled plate for rod, stopper cylinder, micro-switch.

Max. operating pressure: 10 bar.

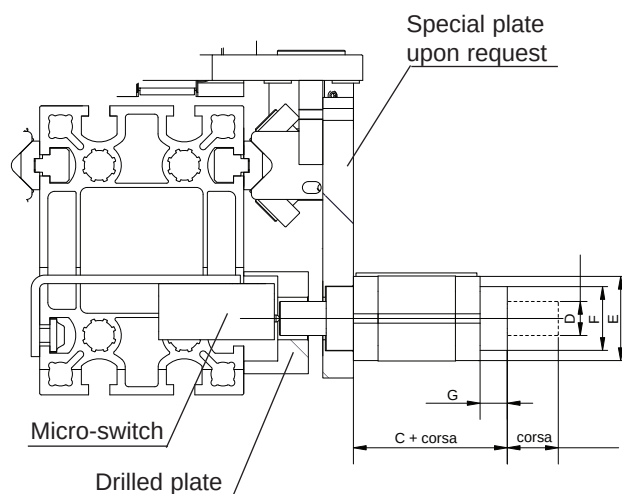

1- Lock-pin device

ØD rod	stroke	C	E	F	G	Kit Code
20	20	60.5	50	38	16	236.0021
32	30	-	-	-	-	236.0022

2- Accessory: drilled plate for rod


ØD rod	Base	Length	Thickness
20	60	100	39
32	60	100	39


Index

Code	page	Code	page	Code	page	Code	page	Code	page	Code	page
1010732	69	2112129	71	4360952	65	A35-30	67	MA1-5	13	TCS 200	37
2020342	15	2112130	71	4360955	65	A35-40	67	MCH 105	21	TCS 220	39
2021146	14	2112131	71	4360957	65	A35-60	67	MCH 65	17	TCS 280	41
2021147	14	2112132	71	4360958	65	A39-25/5000	67	MCH 80	19	TCS 360	43
2021753	14	2112133	71	4360960	65	A39-25/6000A	67	MCHH 105	22	TVH 180	27
2022138	71	2112134	71	4360963	65	A39-26/5000	67	MCR 105	20	TVS 170	28
2022139	71	2112135	71	4360965	65	B30-53	67	MCR 65	16	TVS 220	29
2022140	71	2112136	71	4360966	65	B30-54	67	MCR 80	18	ZCEL 170	55
2022141	71	2150477	70	4360968	65	B30-55	67	MCS 105	21	ZCEL 220	57
2022184	14	2151768	70	4360971	65	B30-56	67	MCS 65	17	ZCERQ 170	55
2050163	66	2151769	70	4360974	65	B30-63	67	MCS 80	19	ZCERQ 220	56
2050165	66	2151770	70	4360984	65	B30-64	67	MTR 105	24	ZCG 60	47
2050463	66	2151771	70	4360986	65	B30-65	67	MTR 80	23	ZCG 90	48
2050464	66	2151772	70	4360987	65	B30-66	67	MVH 105	25	ZCL 100	53
2071892	67	2151773	70	7400568	13	B32-40	68	MVHH 105	26	ZCL 170	55
2071893	67	2152124	70	9151174	66	B32-50	68	MVR 105	24	ZCL 220	57
2071894	67	2152125	70	A30-54	67	B32-55	68	MVR 80	23	ZCL 60	47
2072288	67	2360018	74	A30-55	67	B32-60	68	MVS 105	25	ZCL 90	50
2090019	69	2360019	74	A30-56	67	B32-65	68	TCG 100	30	ZCRQ 100	52
2090023	69	2360021	74	A30-64	67	B32-67	68	TCG 180	32	ZCRQ 170	54
2090298	63	2360022	74	A30-65	67	B32-85	68	TCH 100	31	ZCRQ 220	56
2090467	62	3020001	17	A30-66	67	B35-15	67	TCH 170	35	ZCRR 90	49
2091202	62	4060056	66	A30-76	67	B35-20	67	TCH 180	33	ZCY 180	51
2091277	70	4150388	66	A30-86	67	B35-30	67	TCH 200	37	ZMCPLL 105	58
2091281	70	4150760	66	A32-40	69	B35-40	67	TCH 220	39	ZMCLL 105	58
2091776	70	4150761	66	A32-50	69	BD31-30	68	TCH 280	41	ZMCH 80	59
2091777	70	4150762	66	A32-55	68	BD31-40	68	TCH 360	43	ZMCH 105	59
2091778	70	4150763	66	A32-60	69	BD31-50	68	TCRQ 170	34	KCH 100	60
2091779	70	4150764	66	A32-65	68	BD31-60	68	TCRQ 180	32	KCH 150	60
2091780	70	4150773	66	A32-67	68	E01-4	12	TCRQ 200	36	KCH 200	60
2091781	70	4151105	66	A32-80	69	E01-5	13	TCRQ 220	38	KCH 30	61
2091855	70	4360144	65	A32-85	68	F01-1	13	TCRQ 280	40	KCH 50	62
2092431	68	4360145	65	A33-20	67	M 65X67	12	TCRP 280	40	TECRQ 170	44
2092432	68	4360146	65	A33-26	67	M 80X80	12	TCRP 360	42	TECH 170	44
2092433	68	4360948	65	A33-28	67	M 105X105	12	TCS 100	31	TECRR 180	45
2111061	69	4360949	65	A35-20	67	MA1-2	13	TCS 170	35	TECH 180	45
2112128	71	4360951	65	A35-25	67	MA1-4	13	TCS 180	33		

ROLLON®
Linear Evolution

Sys

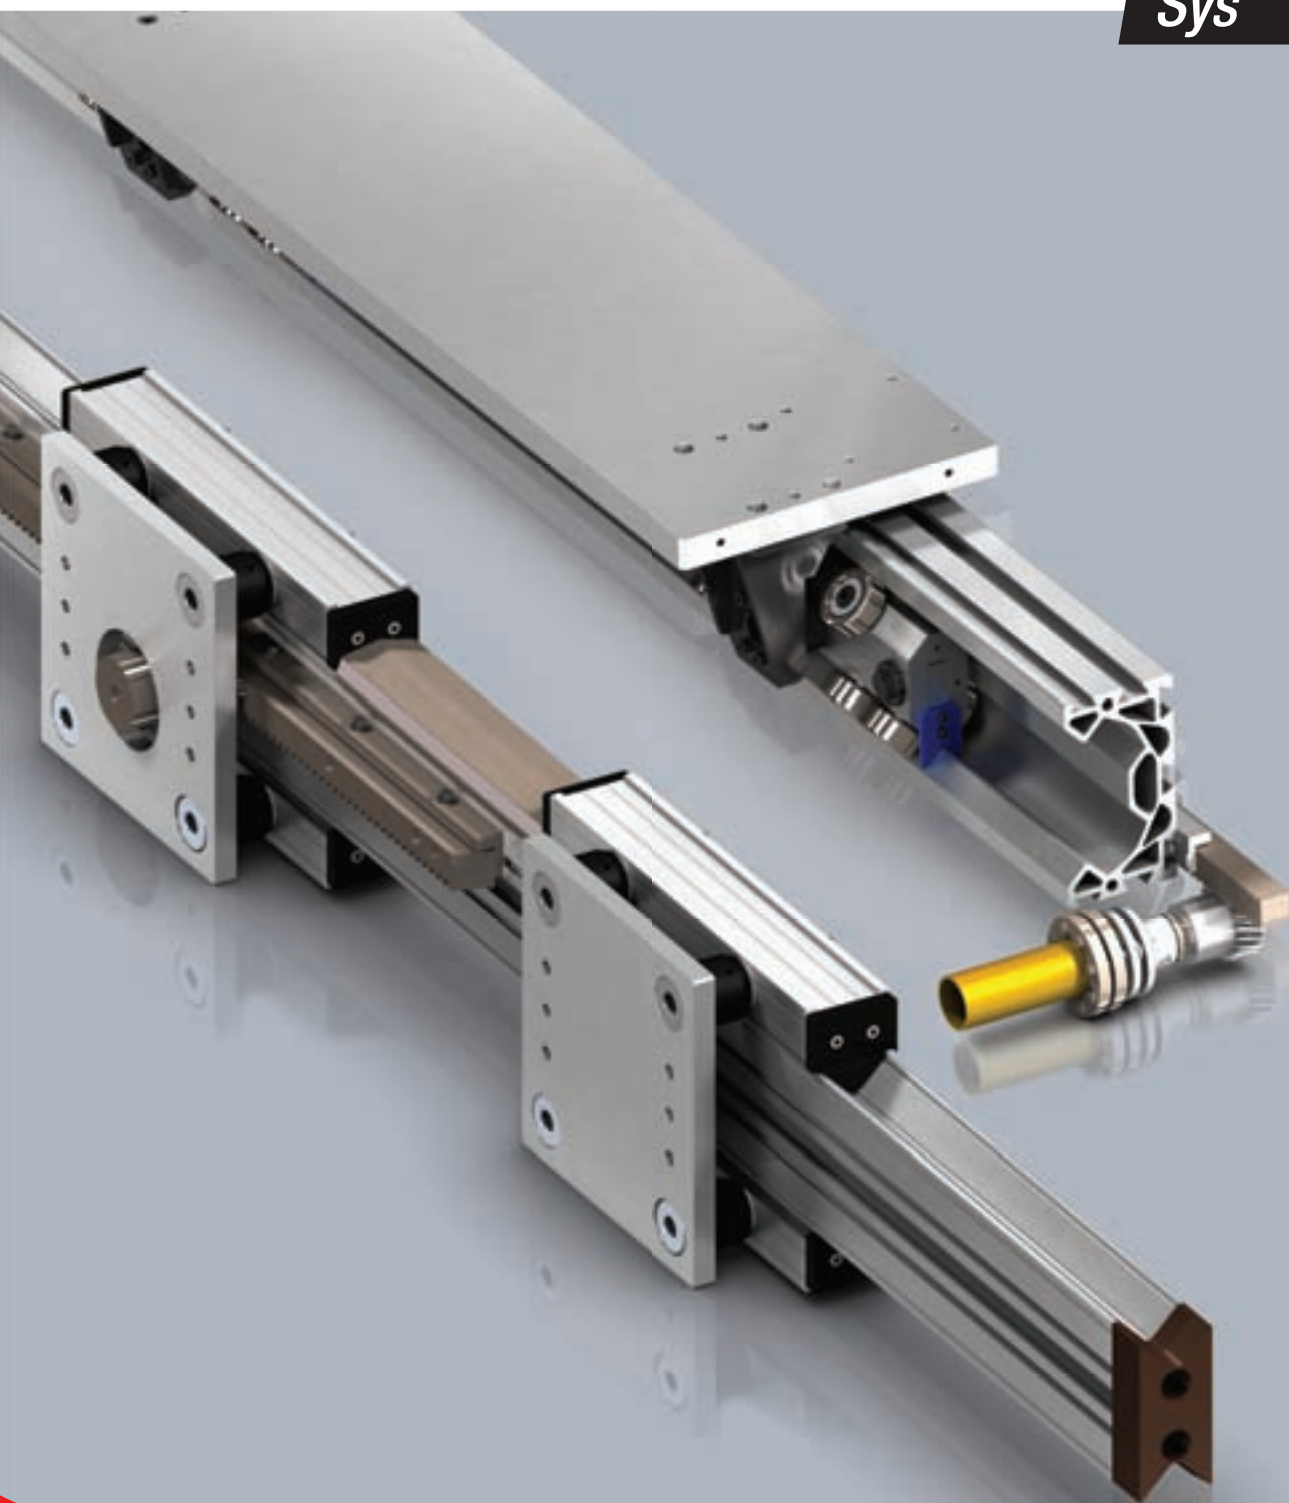

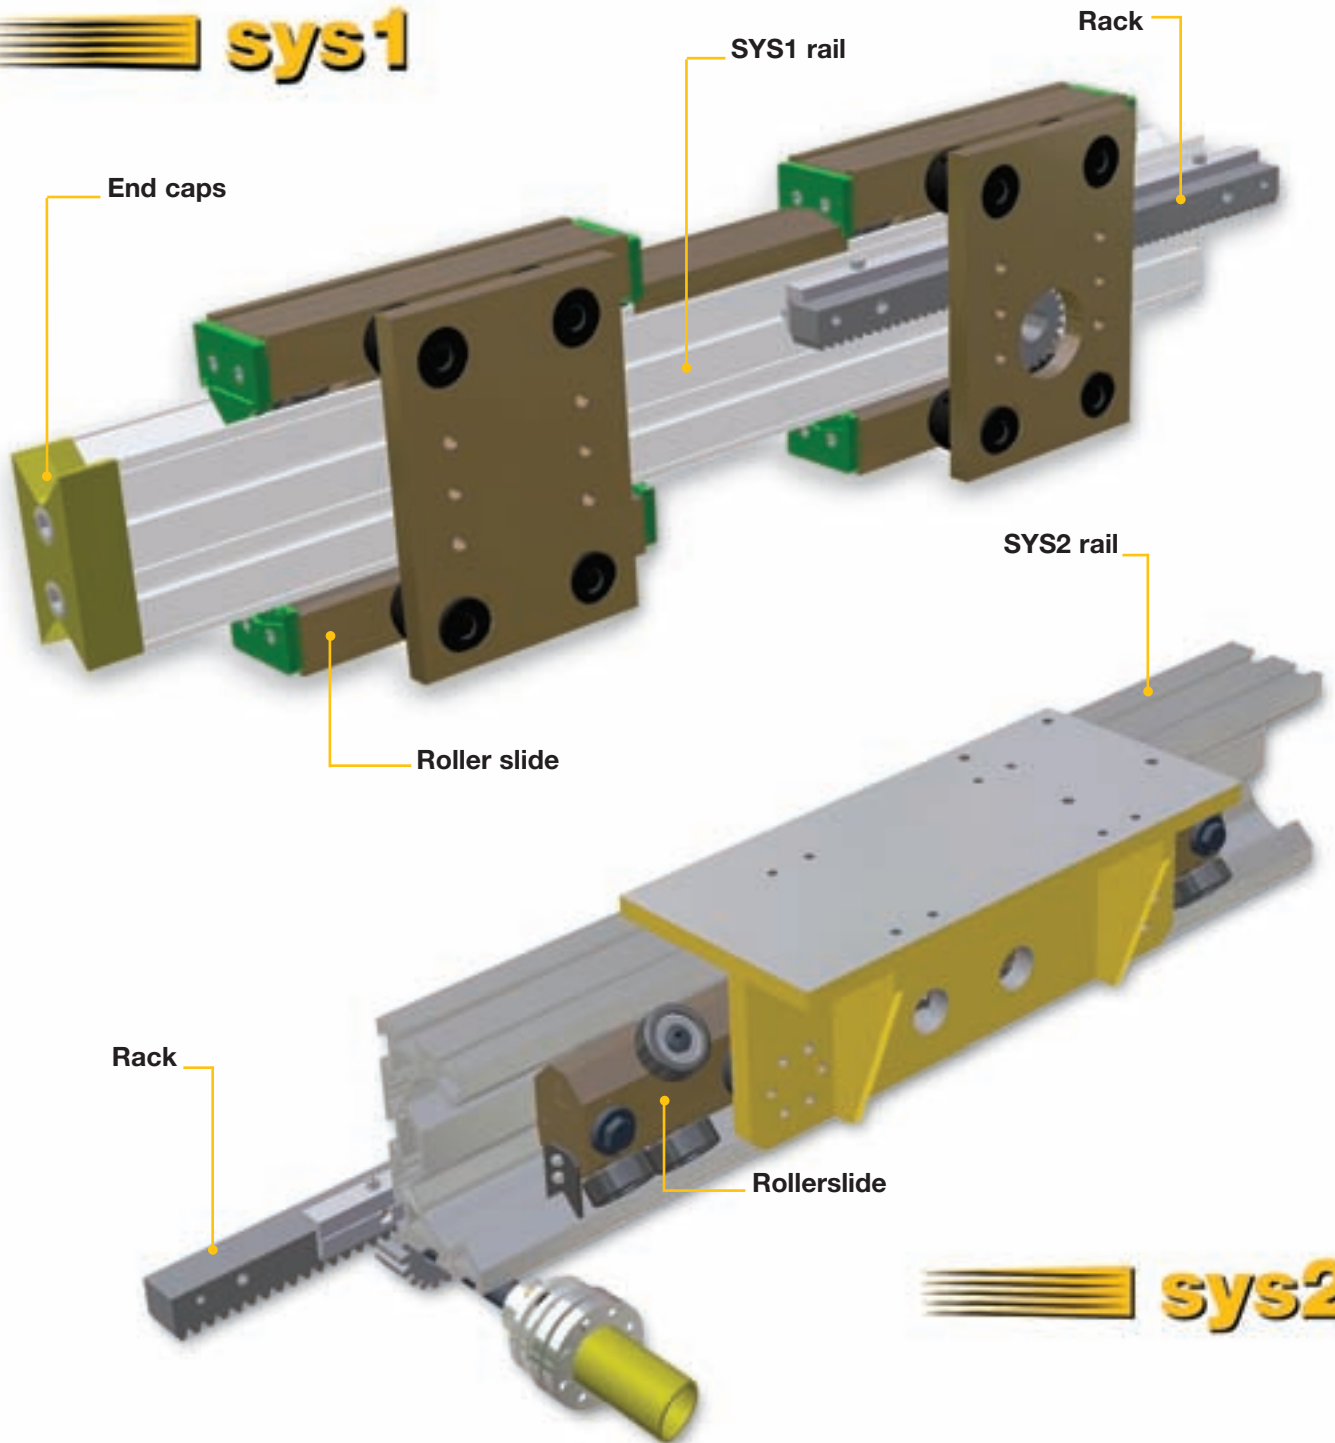
The **Sys** linear transfer system consists of higher mechanical performances aluminium alloy rail with deep-anodising surface and light alloy extruded roller slides.

Innovative features are:

- extremely small section sizes
- modularity of the system achieved by structural
- profiles and wide range of accessories
- special profile section to protect sliding tracks and roller
- slow friction lame contact roller
- high resistance polyamide roller surface
- customizable solutions for the applied loads

Applications such as handling units, Cartesian robots and **lift and shift** systems are implemented in the following sectors: wood working industry, **body in white welding** lines, white goods industry, **piping and sheet metal** working industry.

Index

SYS1

Assembly solutions	2
Scaling request form	4
Overview	5
Assembly specifications	6
Rail description	7
Rail specifications	8
Single track guide	9
Roller slide description	9
Roller slide size	10
Spare part pin with roller	12
Assembly pins	12
Connecting plates	14
Order code table	16
Profiled Rollers	17
Angular support	18
Roller guard	19
Rail connecting plates	19
Accessory fixing plate	20
Rack fixing plates	20
Racks	20
Pinion Gears	21
Slots details	22
Dovetail inserts	22
Threaded inserts - Type A slots	23
Threaded inserts - Type B-C slots	24
Threaded Inserts	25
Assembly brackets	26
Filler strips	27
Guide end parts	28
End caps	28
Rail Extension Kits	28
PVS® connectors	29
Guard profiles	30
Belt assembly	30
Machining codes	31

SYS2

Assembly solutions	32
Special applications	33
Overview	33
Roller slide description	34
Assembly specifications	34
Rail specifications	35
Roller slide size	36
Rail connecting plates	38
Roller slide guard rail	38
Accessory fixing plate	38
Tool fixing bracket	39
Ø78 V-shaped rollers	39
Code parts index	40

EUROPEAN PARTNERS

AGORA TECHNIQUE S.A.R.L.

Parc Volta 3, Rue Parmentier
94140 Alfortville
Tel. +33 1 45 18 43 70
Fax. +33 1 45 18 43 71
<http://www.agora-technique.com>
E-mail: agora@agora-technique.com

RATIO-CUT LINEARTECHNIK GmbH

Wittighöfer Straße 17
D-32657 Lemgo
Tel. +49 5261 666 506
Fax. +49 5261 668 741
<http://www.portalachsen.de>
E-mail: lineartechnik@ratio-cut.de

IBALTEC SISTEMAS S.L.

C/Josep Soler 74-76 Bjs
08310 Argentona (Barcelona)
Tel. +34 937 56 11 53
Fax. +34 937 97 40 34
<http://www.ibaltec.com>
E-mail: info@ibaltec.com

C.Z.T. TECH MAX

1 Stalowa Str.
91-859 Lodz (Poland)
Tel. +48 426 59 97 01
Fax. +48 426 59 97 01
<http://www.czt-tech-max.pl>
E-mail: losiewala@czt-tech-max.pl

03-2015 edition

This publication cancels any previous one.


Due to the constant progress of our research, we reserve the right to modify drawings or features without notice.

No part of this catalogue may be reproduced without written permission express from the copyright owner.

All rights reserved. This catalogue has been accurately checked before publishing. We disclaim all responsibility in case of errors and omissions.

Tecno Center is UNI EN ISO 9001:2000 and ISO 14001 certified

Assembly solutions

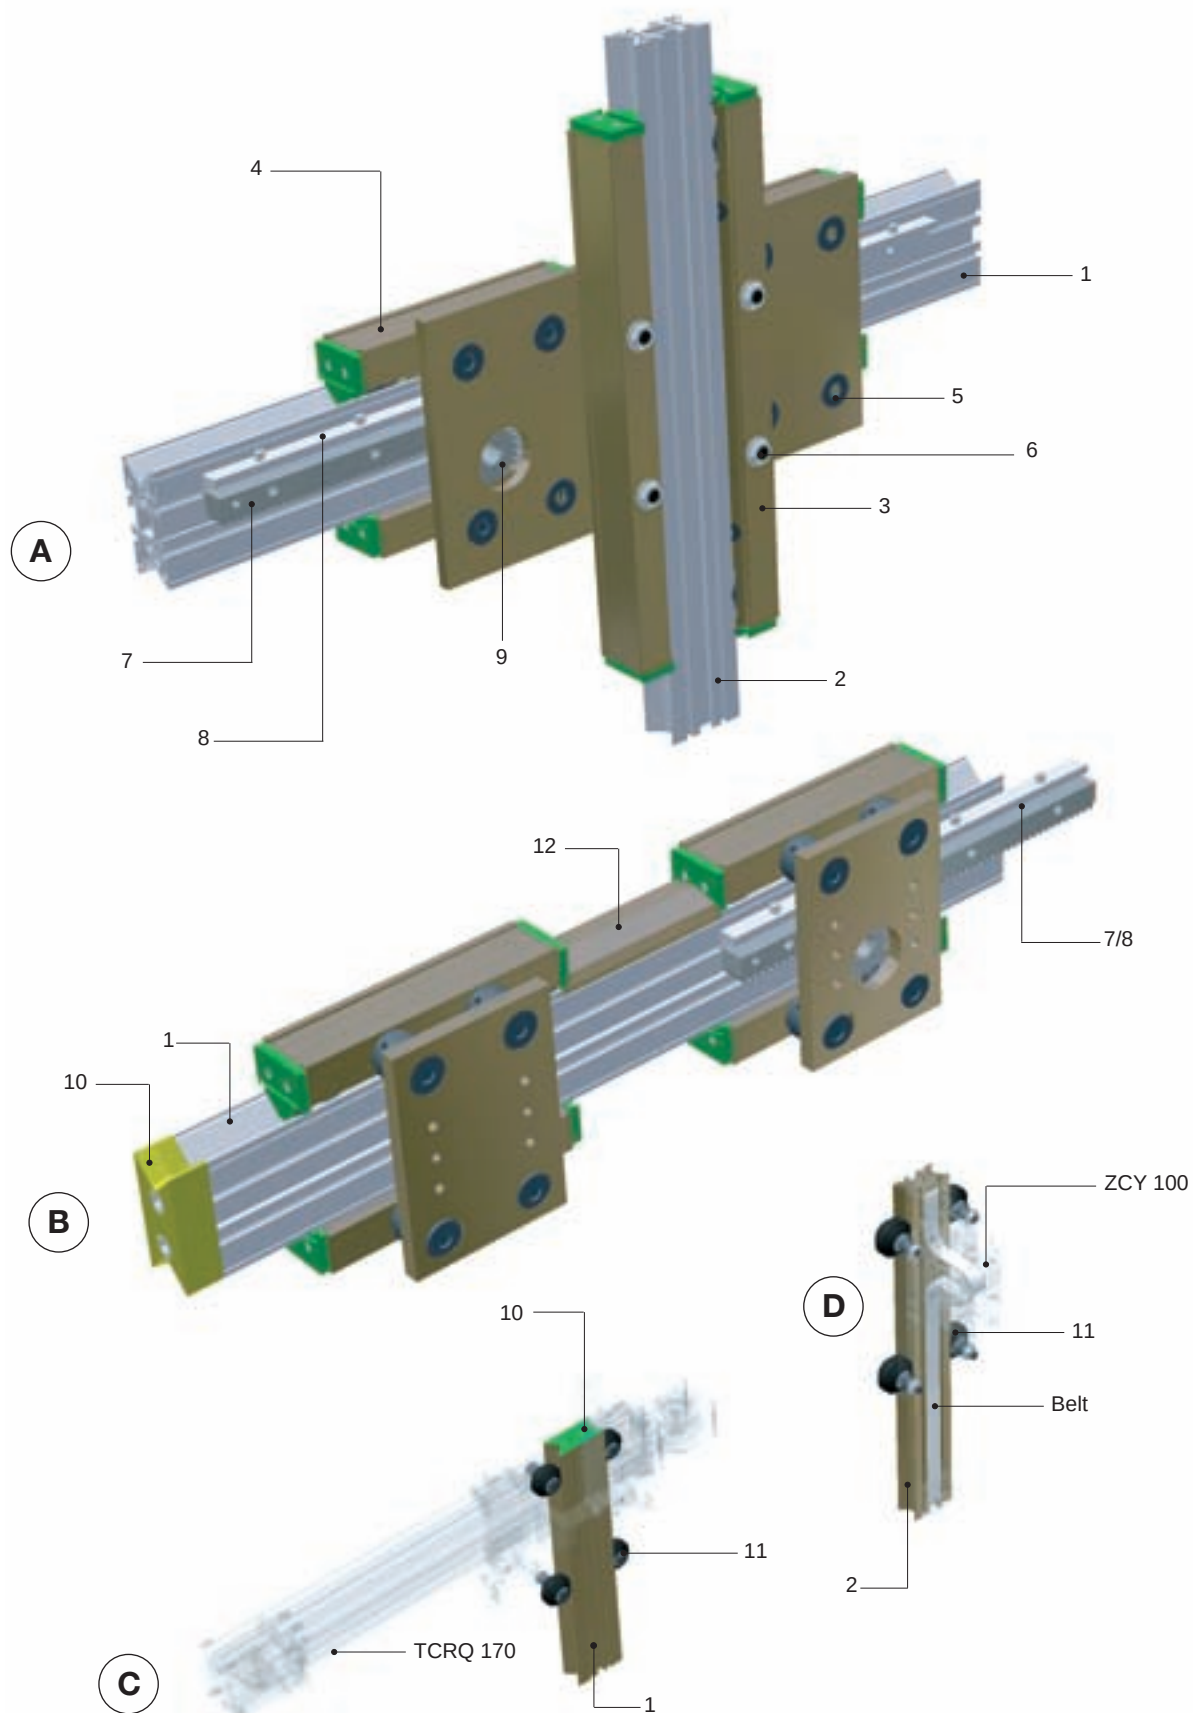

“A” Assembly (fixed rail / moving carriage):

This example represents a typical 2-axis system completely manufactured with SYS1 products.

The horizontal traverse is made of a pinion/rack drive, handling a carriage composed of a plate and 4 roller slides. On the plate there is the pinion through hole.

For this kind of system we can supply motor adapter plate and shafts.

The vertical axis is pneumatically operated (not shown).

On demand we can supply cylinder supports as well.

“B” Assembly (moving rail / fixed carriage):

This example represents a system operated by a pinion/rack drive.

The rail runs on roller slides, which can be mounted on plates or fixed structural works.

“C” Assembly:

This example again shows a 2-axis system realised by coupling two Tecno Center products.

The horizontal axis is composed of a TCRQ 170 linear module (see Modline catalogue).

The vertical axis is pneumatically operated.

“D” Assembly:

This example represents a ZCY100 linear unit (see Modline catalogue).

This module is composed of a SYS rail sliding on rollers, it is toothed belt operated.

Legend:

- 1 – SYS1-M rail (see page 8)
- 2 – SYS1-P rail (see page 8)
- 3 – Roller slides L=600mm (see page 11)
- 4 – Roller slides L=290mm (see page 10)
- 5 – Type D assembly pins (see page 13)
- 6 – Type A assembly pins (see page 13)
- 7 – Rack (see page 20-21)
- 8 – Rack fixing plate (see page 20)
- 9 – Toothed pinion
- 10 – End cap (see page 28)
- 11 – Ø76 shaped rollers (see page 17)
- 12 – Guard profile (see page 30)

Sizing request form

For a proper definition of the application, fill in the scaling request form and send it to the Technical Support Department.

Date:Request no.....

Filled in by.....

Company.....

Address.....


PhoneFax.....


E-mail

Lift and shift system with moving rail

SIZING TEMPLATE

Applied load		[Kg]
No. of stations, loading/unloading included		
Total system length	L	[m]
Distance between stations	L1	[m]
Rail length	L2	[m]
Number of the part-holder arms on each rail side	R	
Part-holder arm weight	S	[Kg]
Total load on one rail	P	[Kg]
Distance between rail Y-axis and applied load	M	[mm]
Weight distributed on the rail (e.g.: 50x50 rack)	C	[kg/m]
Distance between rail Y-axis and applied distributed weight	N	[mm]
No. of the rail supports incl. extremity roller slides		
Distance between rail X-axis and applied load	H	[mm]
Number of rail sides		
Distance between rails	B	[mm]
Translation speed	V	[m/s]
Acceleration	a	[m/s ²]
Transport time (one way)	t	[s]

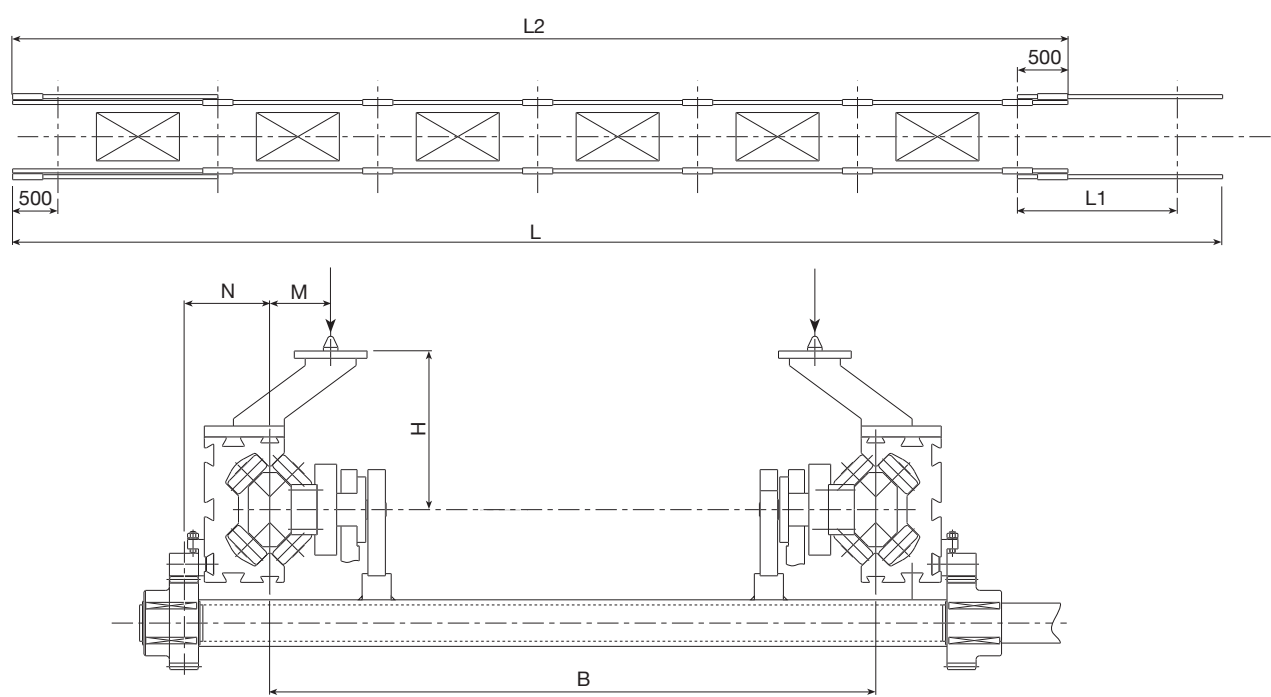

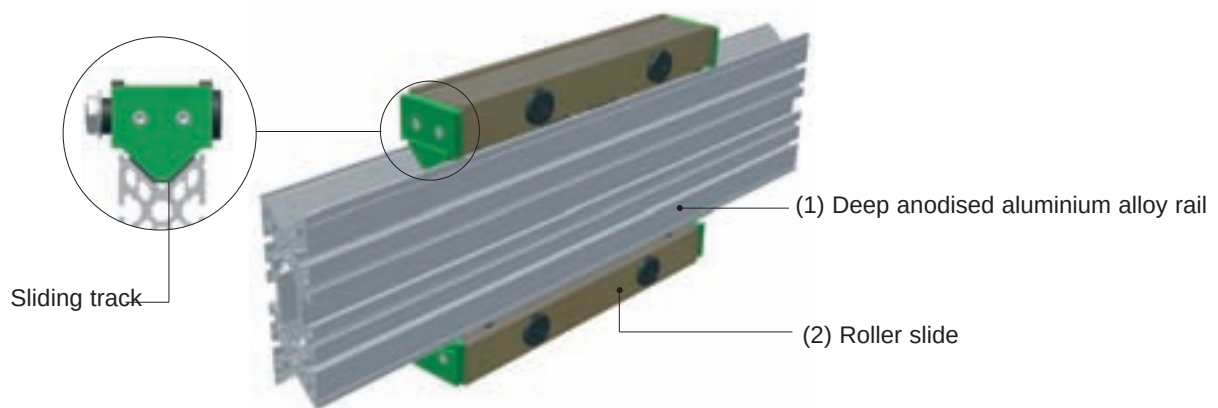

SYStema was conceived to offer the market competitive and easy to use products.

It is used in handling and transfer systems and consists of light aluminium alloy rails (1) and low-friction roller slides (2). The peculiar feature of this rail is its geometry, that has been developed to optimize torsion performances and reduce reaction stresses on roller slides, with “competitive benefits” accordingly.

In detail, the sliding track configuration allows the system, with an equal torque applied to the rail, to minimize the roller reactions, compared to similar applications with the same overall dimensions, therefore:

- With an equal outside and overhanging load, the number of roller slides decreases as does the cost.
- With an equal roller slides number, the outside applied load and/or the projection can be increased.

The sliding tracks are built to protect the rolling elements and to minimize the width.

This allows the transfer system to be installed close to manufacturing sites.

Besides, the light alloy gives the rails a good mechanical resistance and protects them against aggressive external agents.

SYStema's assembly possibilities are:

- Moving rail and fixed roller slides
- Fixed roller slides and moving rail

These two solutions, single or combined, can solve many problems; particularly, there is a possibility to produce Cartesian robots, palletizers and portal systems.

Some interesting applications have been realised in automation and robotics fields, plastic moulding, light industry, wood and rubber industry, painting, textile and handling fields.


Assembly specifications

A - Features

This translation system consists of a plate, where roller slides with concentric and eccentric pins are fixed.

The eccentric pins are fitted for adjusting backlash between roller slides and track and have a circular identification mark (1).

The plate is supplied with machining for pin assembly: through holes for concentric pins and hole and slot for eccentric ones.

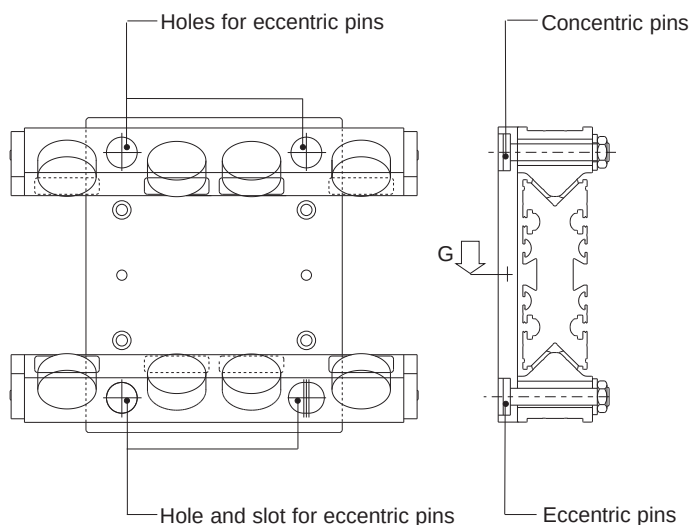


B - Alignment

Sliding tracks have to be perfectly aligned.

C - Rack assembly

With rack drive it is very important to guarantee the exact parallelism between the sliding system and the rack axis.

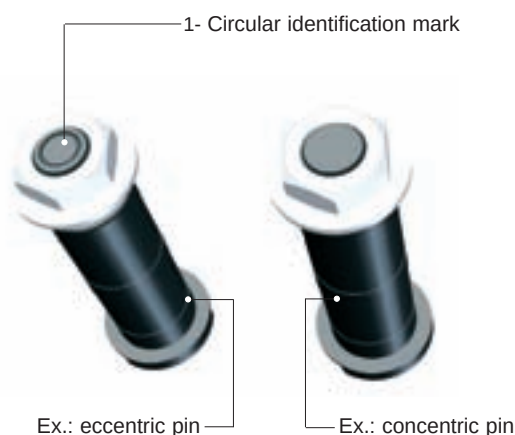

D - Roller slide: assembly and adjustment

1) Check the alignment and set in contact the concentric pin roller slides and the rail.

2) Take up backlashes: operate on the eccentric pins fixed on the through hole first, then on the one fixed on the slot.

3) Repeat the adjustment.

4) Rotate the reachable rollers with a finger: they must slide without roller slide advancing.

The mean load condition is easily achieved and can damage the plastic coating.

For the simultaneous assembly of several roller slides in one system, it is possible that not all rollers can remain in contact with the rails, because of the rail natural deformation.

In this case it is not advisable to act on the eccentric pins. It is important to check the smoothness capacity of the whole system, which should be high; if not, loosen the pins and repeat the adjustment. While assembling, ensure that the rollers and the rail surfaces are not dirtied by foreign bodies (oil, grease, chips, etc). Always use scrapers or protections (see page 30).

E - Rail protection


The roller slides are provided with spring scrapers, in order to keep the sliding surface clean and to avoid the roller meeting any obstacle while moving.

If this does not meet the customer's requirements, we can supply on demand other track protections, such as bellows, toothed belts or protecting straps.

It is possible to use the guard profile to protect the area between two roller slides (code 302.0147 – see page 30), always available in stock.

F - Tightening specifications

Make sure all parts are blocked with proper screws, in compliance with the prescribed tightening torque standards.

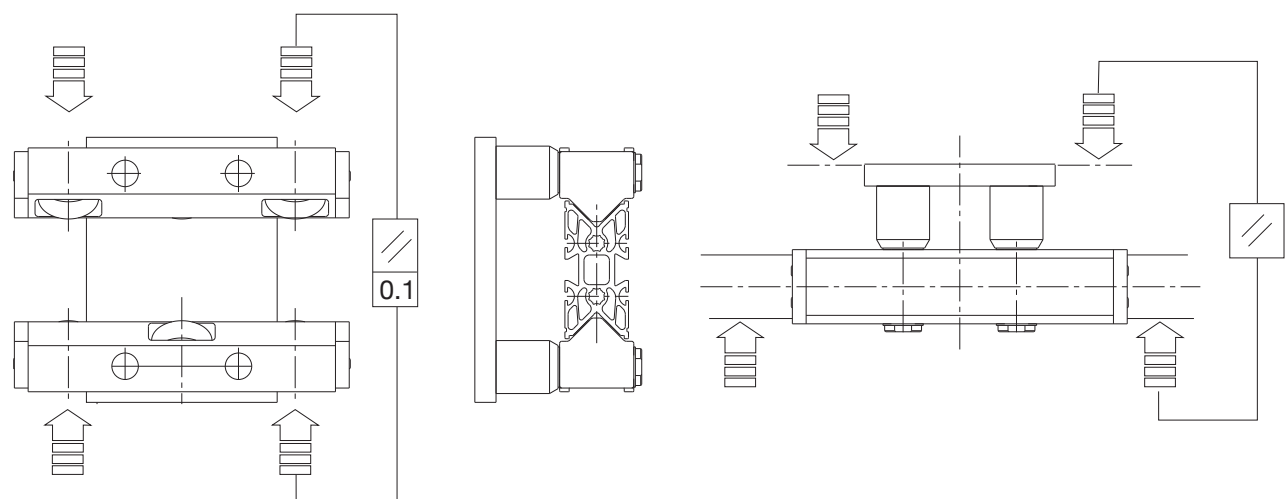

WARNINGS

The mean load condition is easily achieved and can damage the plastic coating.
To realise a moving carriage with 1 plate and 2 x 3-roller slides, rollers should be symmetrically positioned, respect to the connecting plate.
Check the correct parallelism between the two roller slide opposite plane surfaces and between the roller slide connecting plates and the rail (primary control for the correct 3+3-roller slide assembly), and then block the eccentric pins without moving them.

The adjustment of D and E executions (foreseen for one hole roller slides) should be made by acting on the eccentric pin gradually, until the roller contact is reached, without reaching the mean load capacity.
Ensure that rollers keep their low-friction features, and then assemble the scrapers, allowing a minimal back-lash with the rail.


Rail description

The symmetrical rail section was developed to achieve maximum rigidity. It is provided with slots that can be used with a wide range of accessories always available in stock. The rail surface is chemically treated, in order to obtain considerable hardness above all on roller sliding tracks, guaranteeing its long-life (a silver anodised rail for light applications is available on demand).


Specifications

Material:	hard. and temp. racks light alum. alloy (AlMgSi)
Quality:	F = 25
Tolerances:	1/2 UNI 3879
Tear resistance:	R = 245 - 270 N/mm²
Yelding point:	Rp = 215 - 240 N/mm²
Hardness:	HB = 70 - 90

Surface treatments:
Deep anodizing (bronze coloured) – thickness > 0,55 mm,
or silver coloured anodizing - thickness > 0,015 mm (on demand)


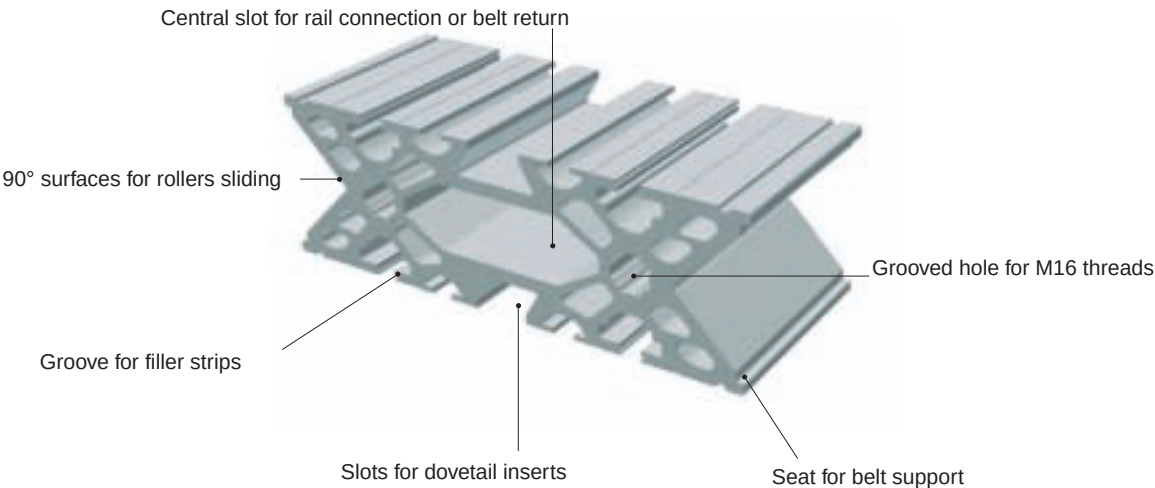


Rail specifications

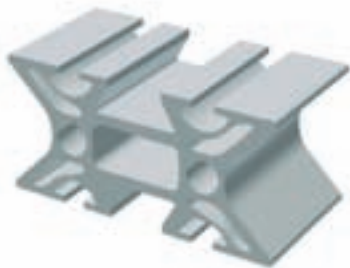



SYS1-P	Code 302.0714	
Size	50x100	mm
Weight	4,7	Kg/m
Max. length	7,5	m
Moment of inertia (Ix)	1.430.000	mm ⁴
Moment of inertia (Iy)	450.000	mm ⁴
Bending section mod. (Wx)	28.600	mm ³
Bending section mod. (Wy)	18.000	mm ³

*Holes for M14 thread and PVS® connectors

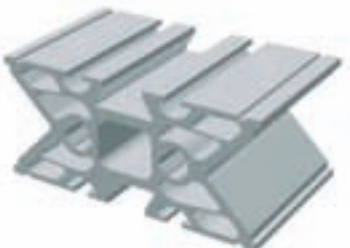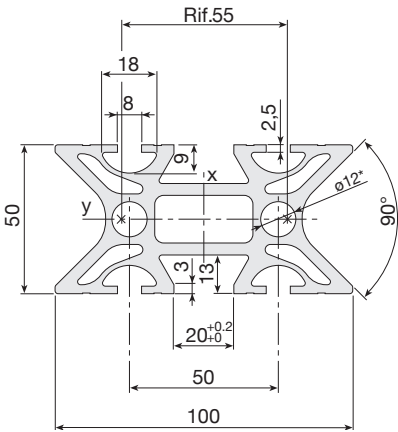


SYS1-M	Code 302.0113	
Size	60x130	mm
Weight	7,8	Kg/m
Max. length	7,5	m
Moment of inertia (Ix)	3.560.000	mm ⁴
Moment of inertia (Iy)	1.005.000	mm ⁴
Bending section module (Wx)	54.708	mm ³
Bending section module (Wy)	33.500	mm ³


*Holes for M16 thread and PVS® connectors

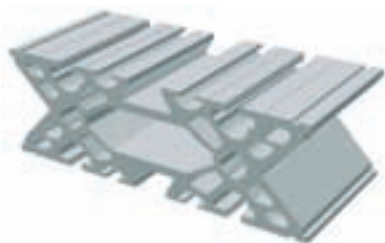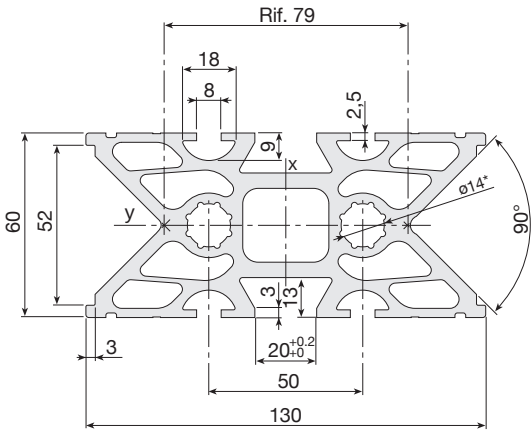

SYS1-G	Code 302.0001	
Size	60x180	mm
Weight	12	Kg/m
Max. length	7,5	m
Moment of inertia (Ix)	12.350.000	mm ⁴
Moment of inertia (Iy)	1.600.000	mm ⁴
Bending section module (Wx)	137.220	mm ³
Bending section module (Wy)	53.330	mm ³


*Holes for M16 thread and PVS® connectors

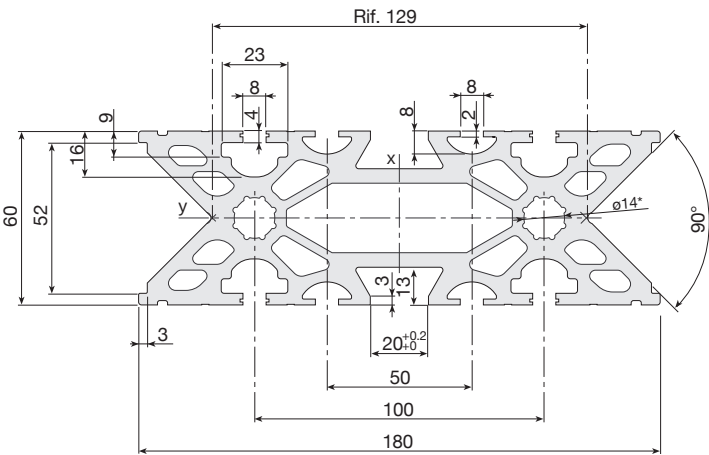

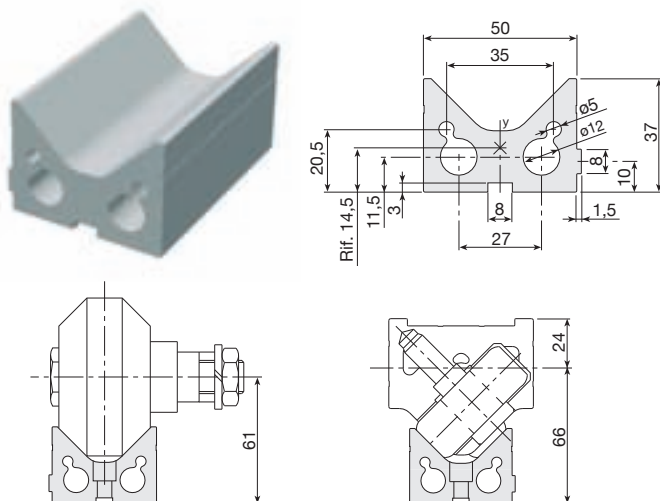


SYS1-H	Code 302.0552	
Weight	3,2	Kg/m
Max. length	6	m
Moment of inertia (Ix)	103.500	mm ⁴
Moment of inertia (Iy)	292.000	mm ⁴

Special machining on demand

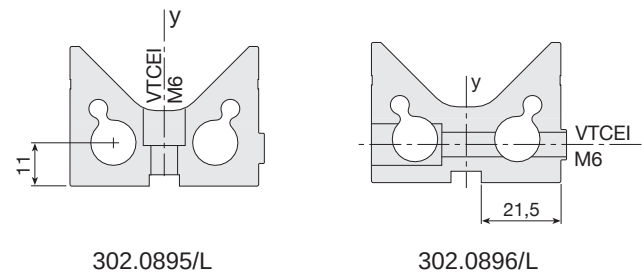

302.0895/L

302.0896/L

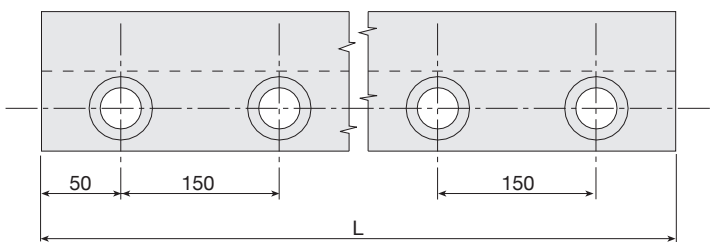

Roller slide description


The main body (1) is made of a high strength aluminium alloy; it can be delivered with 2, 3, 4 and 6 concentric rollers (3) and equipped with scraper (2).

The roller slide is provided with double-sphere ring gear bearings (5), lubrication-free, and neoprene O-rings, to ensure the lowest friction coefficient. The roller external surface is covered with a low-friction plastic material, which guarantees the maximum noise reduction and lowest possible rail wear. Roller slides are mounted on a base plate by concentric and eccentric pins. It is very important to fix eccentric pins on the lowest load side.

A 4-roller slide version with central assembly pin is also available. This pin allows a well balanced load distribution on each bearing through a slight oscillation (type 7).

Type D and E pins (see page 13) are generally used in mounting double-rail assemblies, in order to compensate any parallel error.

1 - Main body

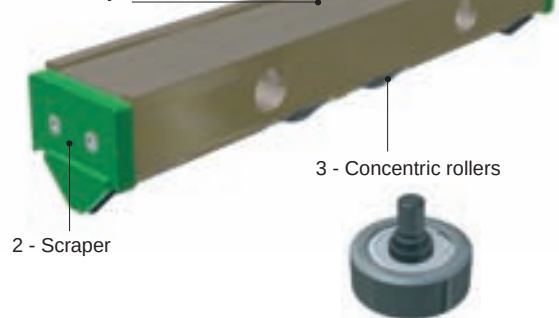


3 - Concentric rollers

2 - Scraper

Type	A	B	C	D	E
SYS 1-P	100	50	158	206	81
SYS 1-M	130	60	182	230	98
SYS 1-G	180	60	232	280	134

Roller specifications


Specifications		
Cw	10.400	N
C0w	6.600	N
Admissible Fr	1.400	N
Max. speed	5	m/s

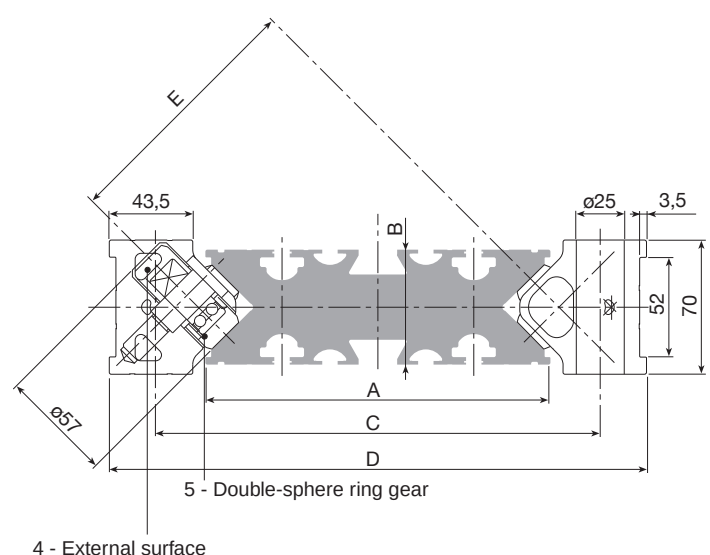

4 - External surface

5 - Double-sphere ring gear


Roller slide size

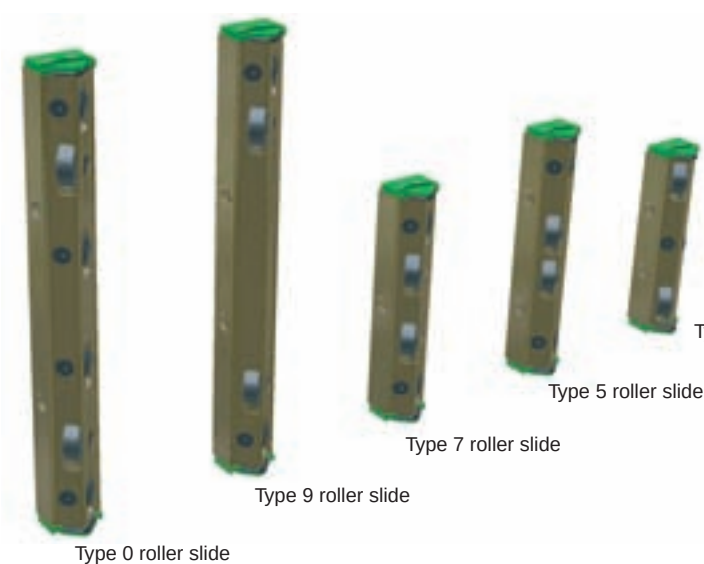

The stated dynamic values do not correspond to the theoretical max. load capacities. They already consider safety factors proper for automation machinery.
All mentioned data refer to the peak efficiency of each stress. Should more peak stresses occur at the same time, please contact our technical dept.

Type 3


3-roller slide, fixed assembly with 2 pins
centre-distance: 107mm
ATTENTION: please refer to “Warnings” on page 7 for a correct assembly.

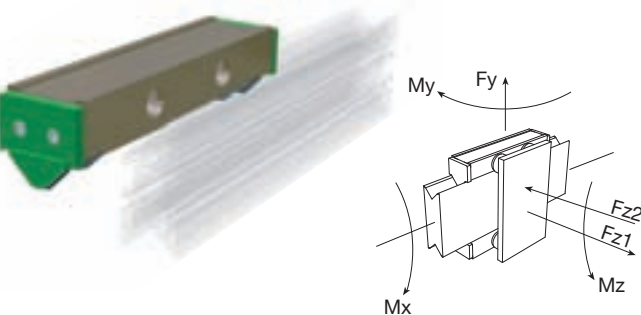


	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_y [N]	F_{z1} [N]	F_{z2} [N]
SYS1-M	257	128	128	2000	2000	3950
SYS1-G	343	128	128	2000	2000	3950

Type 5

4-roller slide, fixed assembly with 2 pins
centre-distance: 180mm

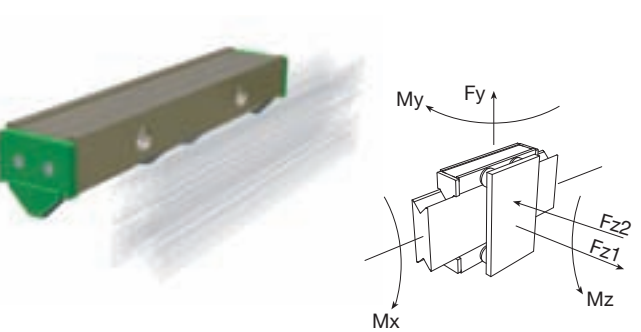


	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_y [N]	F_{z1} [N]	F_{z2} [N]
SYS1-M	257	355	315	3950	3950	3950
SYS1-G	343	355	315	3950	3950	3950

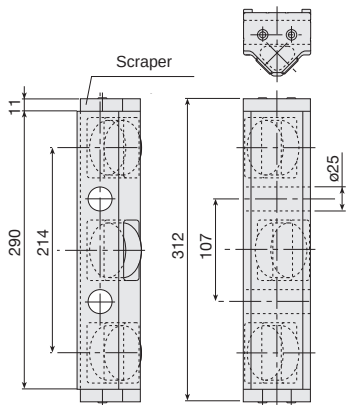

Specifications

Number of rollers	3
Weight	about 3 Kg
Spare part	Code 304.0716

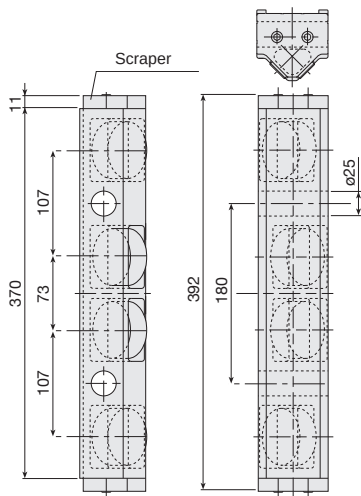

Specifications


Number of rollers	4
Weight	about 4 Kg
Spare part	Code 304.0717

Alternative version


Roller slide with alternate rollers for vertical and/or overhanging horizontal rail applications

(Please state plate, pins and roller slide apart).

Position the roller slide properly while assembling.

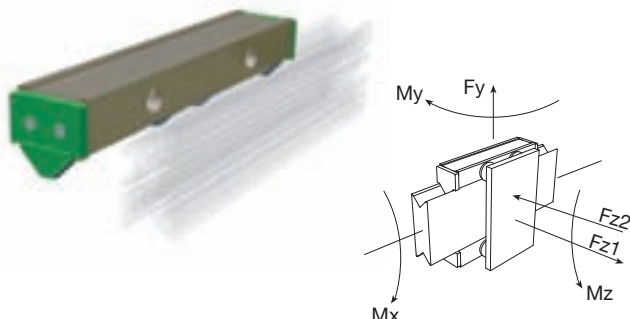

	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_y [N]	F_{z1} [N]	F_{z2} [N]
SYS1-M	257	567	315	3950	3950	3950
SYS1-G	343	567	315	3950	3950	3950

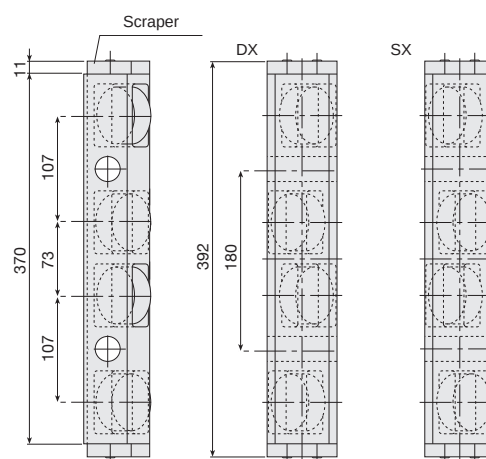


Components

Right roller slide Code 304.0837


Left roller slide Code 304.0866

Type 7

4-roller slide, assembly with 1 self-aligning pin.

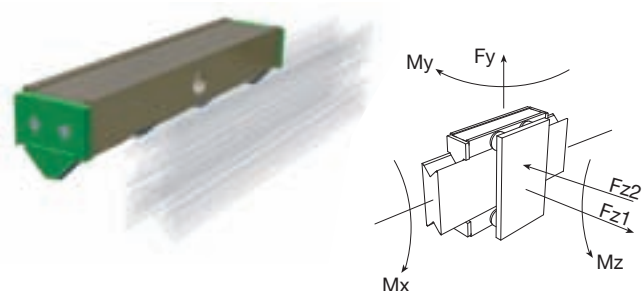

	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_y [N]	F_{z1} [N]	F_{z2} [N]
SYS1-M	257	355	-	3950	3950	3950
SYS1-G	343	355	-	3950	3950	3950

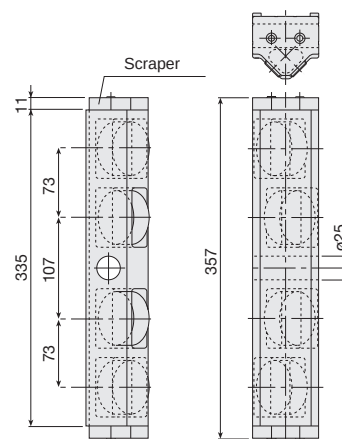

Specifications


Number of rollers 4

Weight about 4 Kg

Spare part Code 304.0718

Type 9

4-roller slide, fixed assembly with 2 pin
centre-distance: 180mm

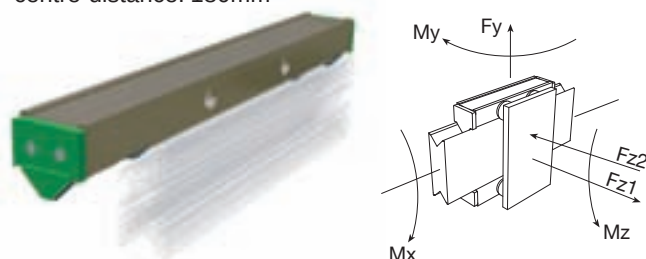


	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_y [N]	F_{z1} [N]	F_{z2} [N]
SYS1-M	257	878	668	3950	3950	3950
SYS1-G	343	878	668	3950	3950	3950

Specifications

Number of rollers 4

Weight about 6,5 Kg


Spare part Code 304.0719

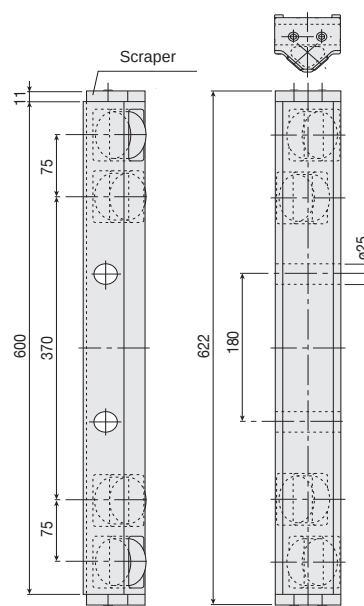

Type 0

6-roller slide, fixed assembly with 2 pins
centre-distance: 260mm


On request it is possible to ask for this roller slide equipped with 4 external rollers only (code 304.0934).

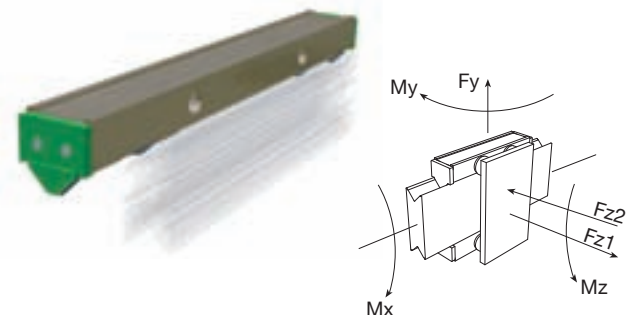

	M_{x1} [Nm]	M_{x2} [Nm]	M_y [Nm]	M_z [Nm]	F_y [N]	F_{z1} [N]	F_{z2} [N]
SYS1-M	257	411	950	668	3950	6317	3950
SYS1-G	343	548	950	668	3950	6317	3950

Specifications


Number of rollers	6
Weight	about 7 Kg
Spare part	Code 304.0720

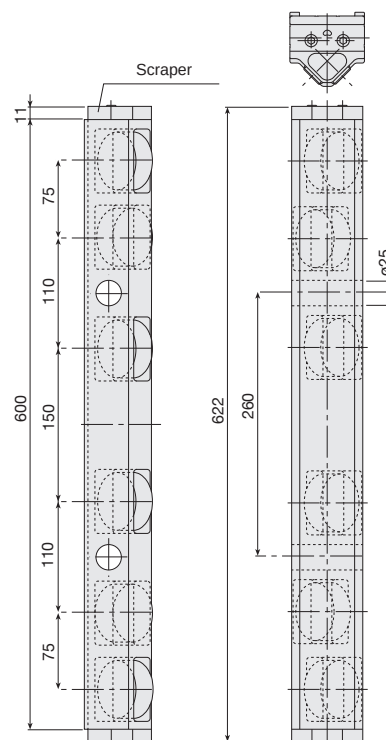

Spare part pin with roller



In case of maintenance, by reassembling the pin, do not lubricate the thread and apply a **tightening torque of max 55 Nm**.



Components

Spare part pin with Ø 57 roller	Code 305.0958
Spare part with stainless steel pin	Code 305.0951

Assembly pins


Type N assembly pins




Material: blued steel. Special executions on demand.
Some versions are also available in AISI 303 stainless steel
ATTENTION: please refer to "Warnings" on page 7 for a correct assembly.

Specifications

Weight	0,4 Kg circa
Concentric	Cod. 336.1001
Eccentric	Cod. 336.1002

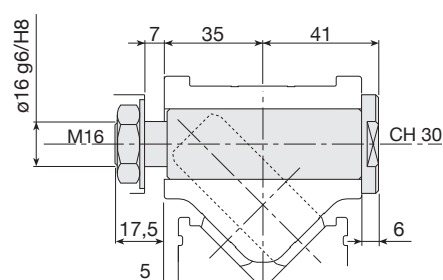

Type A assembly pins

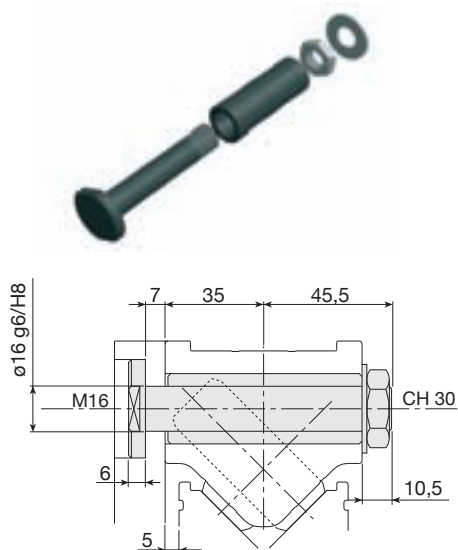


Specifications

Weight	about 0,4 Kg
Concentric	Code 336.0701
Eccentric	Code 336.0702

Type F assembly pins

For double plate carriage.

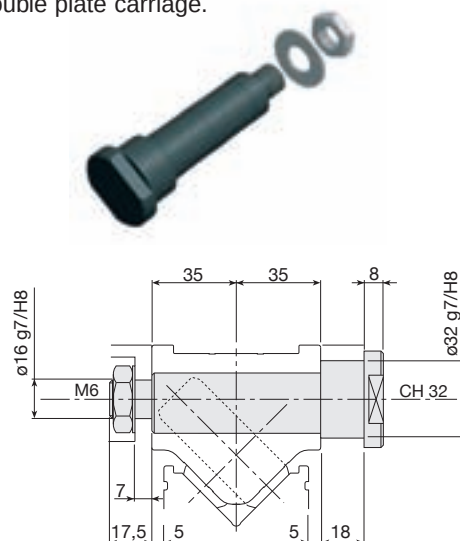


Specifications

Weight	about 0,5 Kg
Concentric	Code 336.0738
Eccentric	Code 336.0739

Type D self-aligning pins

For parallelism error compensation ($\pm 1,5$ mm).

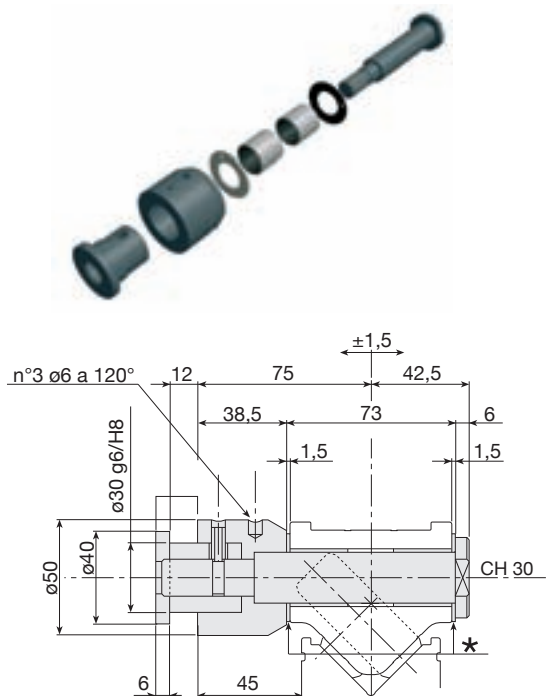


* **NB:** remove the two washers to obtain a roller slide self-alignment of $\pm 1,5$ mm.

Specifications

Weight	about 1,3 Kg
Concentric	Code 336.0707
Eccentric	Code 336.0708

Type E self-aligning pins

For parallelism error compensation ($\pm 1,5$ mm).

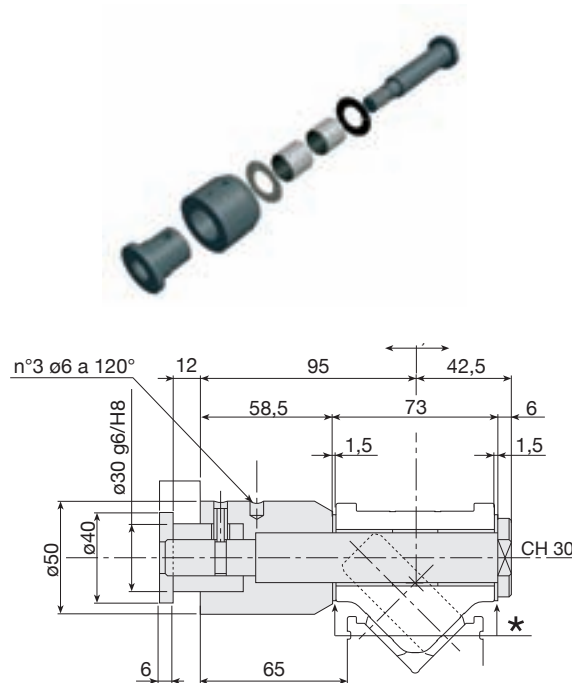

* **NB:** remove the two washers to obtain a roller slide self-alignment of $\pm 1,5$ mm.

Specifications

Weight	about 1,6 Kg
Concentric	Code 336.0709
Eccentric	Code 336.0710

Connecting plates

Material: 6082 aluminium alloy.

ATTENTION: eccentric pins must be mounted on the side with the lower load.

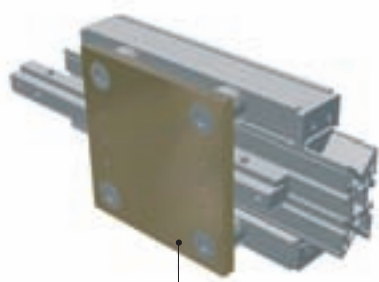


Plate for type D-E pins

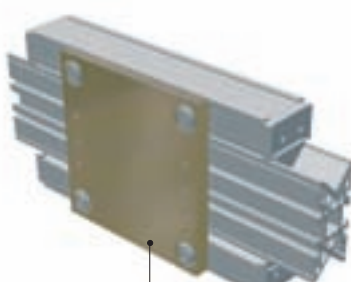


Plate for type A-N pins





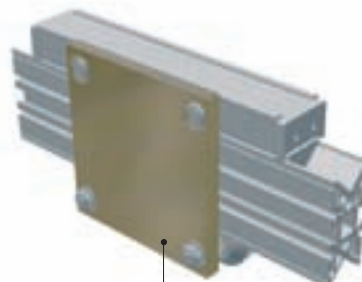


Plate for type A-N pins and V-shaped rollers

Plate for type D-E pins

When a “fixed carriage/moving rail” application is required, where the load (P) is applied onto the bar, please arrange pins as shown in figure no.1.

When a “moving carriage/fixed rail” application is required, where the load (P) is applied onto the carriage, please arrange pins as shown in figure no. 2

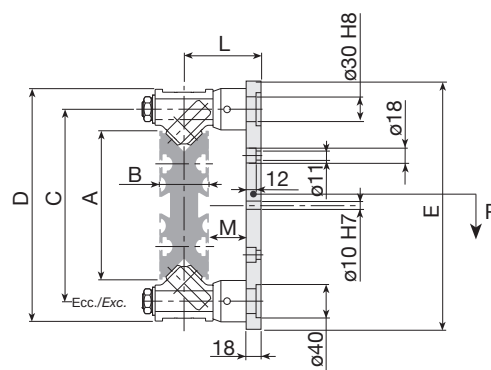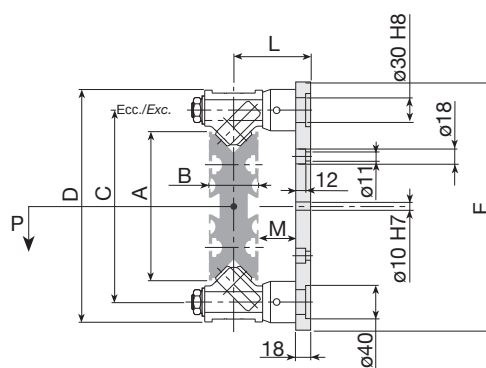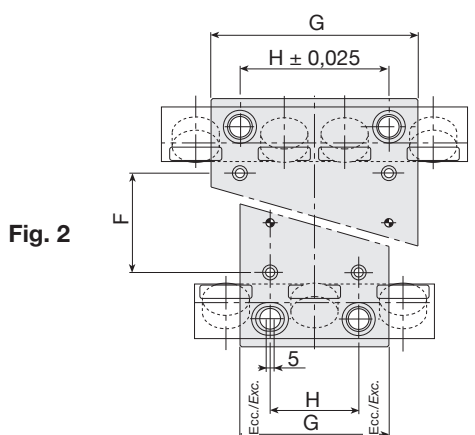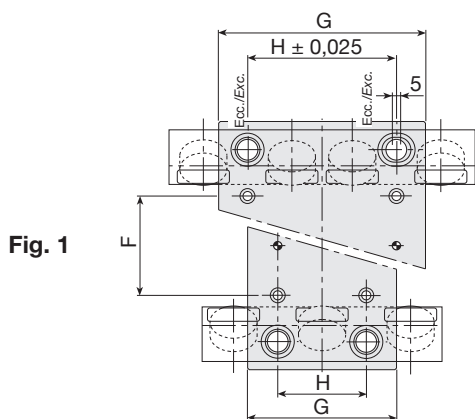

Roller slide	Pins	Rail	A	B	C	D	E	F	G	H	L	M	Plate
Type 5-9	D	SYS1-M	130	60	182	230	250	70	250	180	93	45	315.0660
Type 5-9	D	SYS1-G	180	60	232	280	300	100	250	180	93	45	315.0659
Type 5-9	E	SYS1-M	130	60	182	230	250	70	250	180	113	65	315.0660
Type 5-9	E	SYS1-G	180	60	232	280	300	100	250	180	113	65	315.0659
Type 3	D	SYS1-M	130	60	182	230	250	70	180	107	93	45	315.0662
Type 3	D	SYS1-G	180	60	232	280	300	100	180	107	93	45	315.0661
Type 3	E	SYS1-M	130	60	182	230	250	70	180	107	113	65	315.0662
Type 3	E	SYS1-G	180	60	232	280	300	100	180	107	113	65	315.0661

Plate for type A-N pins

When a “fixed carriage/moving rail” application is required, where the load (P) is applied onto the bar, please arrange pins as shown in figure no. 3.

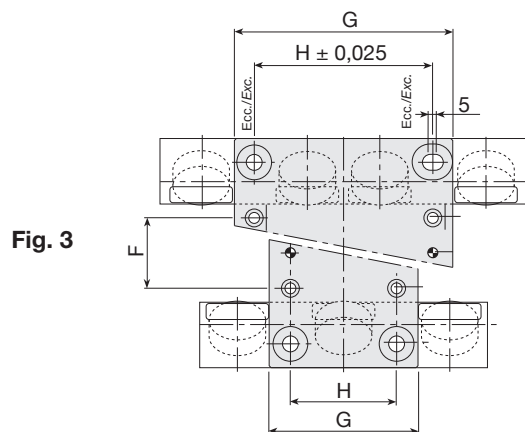


Fig. 3



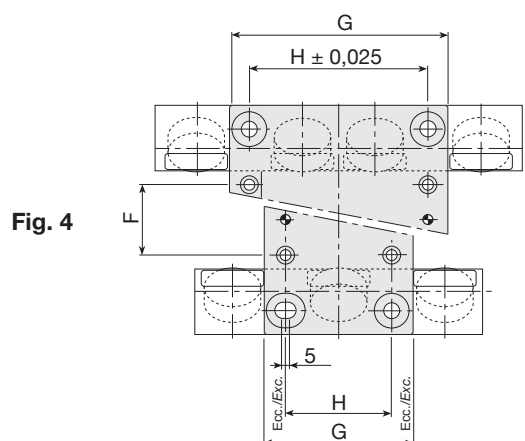




Fig. 4

When a “moving carriage/fixed rail” application is required, where the load (P) is applied on the carriage, please arrange pins as shown in figure no. 4.

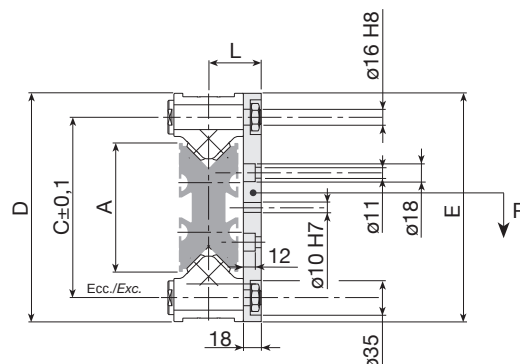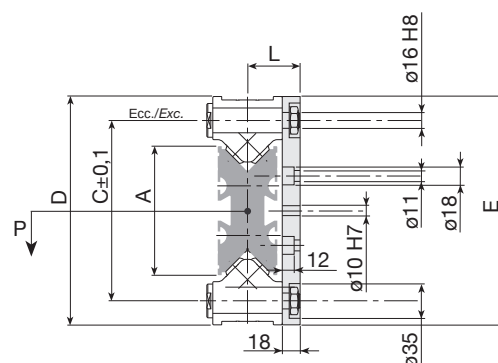

Roller slide	Pins	Rail	A	B	C	D	E	F	G	H	L	M	Plate
Type 5-9	A-N	SYS1-M	130	60	182	230	230	70	220	180	53	5	315.0656
Type 5-9	A-N	SYS1-G	180	60	232	280	280	100	220	180	53	5	315.0655
Type 3	A-N	SYS1-M	130	60	182	230	230	70	150	107	53	5	315.0658
Type 3	A-N	SYS1-G	180	60	232	280	280	100	150	107	53	5	315.0657





Plate for type A-N pins and V-shaped rollers







Roller slide	Pins	Rail	A	B	C	D	E	F	G	H	L	Plate
Type 5-9 + galet diabol	A-N	SYS1-M	130	60	177	239	230	-	220	180	53	315.1032
Type 5-9 + galet diabol	A-N	SYS1-G	180	60	227	289	280	-	220	180	53	315.1031

Order code table

Roller slides and pins

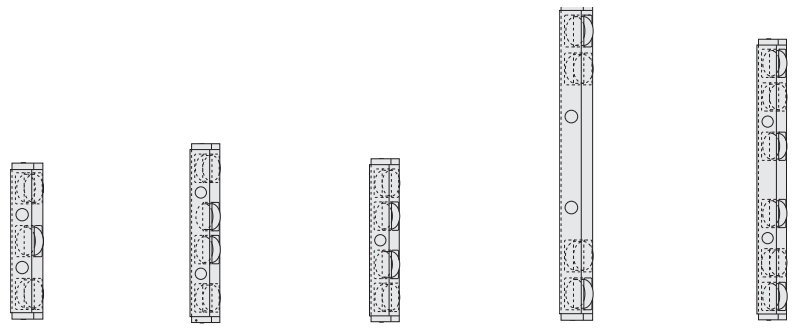							
			3	5	7	9	0
	N	con.	304.0243	304.0245	-	304.0726	304.0727
		exc.	304.0303	304.0305	-	304.0728	304.0729
	A	con.	304.0203	304.0205	-	304.0601	304.0602
		exc.	304.0263	304.0265	-	304.0617	304.0618
	D	con.	304.0221	304.0223	304.0225	304.0607	304.0608
		exc.	304.0281	304.0283	304.0285	304.0623	304.0624
	E	con.	304.0229	304.0231	304.0233	304.0609	304.0610
		exc.	304.0289	304.0291	304.0293	304.0625	304.0626
	F	con.	304.0237	304.0239	-	304.0611	304.0612
		exc.	304.0297	304.0299	-	304.0627	304.0628

Roller slides equipped with pins and plate

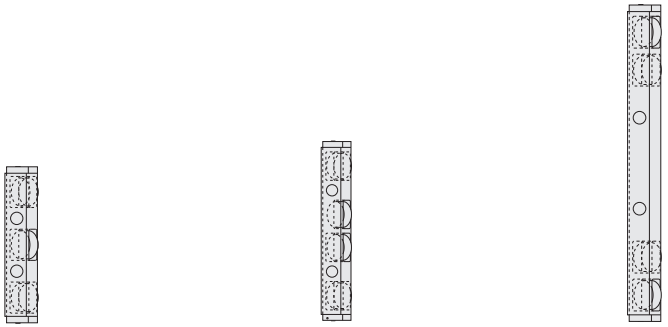
					
		Rail	3	5	9
	N	SYS1-M	304.0423	304.0425	304.0735
		SYS1-G	304.0363	304.0365	304.0734
	A	SYS1-M	304.0383	304.0385	304.0641
		SYS1-G	304.0323	304.0325	304.0633
	D	SYS1-M	304.0401	304.0403	304.0644
		SYS1-G	304.0341	304.0343	304.0636
	E	SYS1-M	304.0409	304.0411	304.0645
		SYS1-G	304.0349	304.0351	304.0637
	F	SYS1-M	304.0417	304.0419	304.0646
		SYS1-G	304.0357	304.0359	304.0638

Profiled Rollers

Sys

Material: black high-resistance polyamide coating.
Eccentric or concentric blued steel pin.


On demand: white polyacetic coating (high hardness);
longer pins.

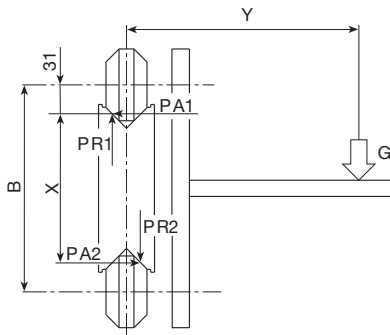

$$P_{A1} = \frac{G \cdot Y}{X} = P_{A2}$$

$$P_{R1} = G + P_{A1}$$


$$P_{R2} = P_{A2}$$

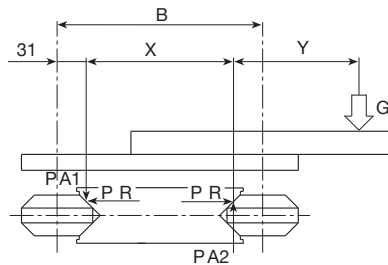

$$P_{A1} = \frac{G \cdot Y}{X}$$

$$P_{A2} = P_{A1} + G$$

$$X = A - 20 \text{ mm}$$



$$P_{A1} = \frac{G \cdot Y}{W + Y}$$


$$P_{A2} = G - P_{A1}$$

B center-distances

SYS1-H	SYS1-P	SYS1-M	SYS1-G	Code
61	148	172	222	305.0730/1
61	148	172	222	305.0732/3
61	148	172	222	305.0747/8
57	140	164	214	305.1570/1

Ø76 shaped rollers

Material: high-resistance black polyamide coating.
Eccentric or concentric blued steel pin.

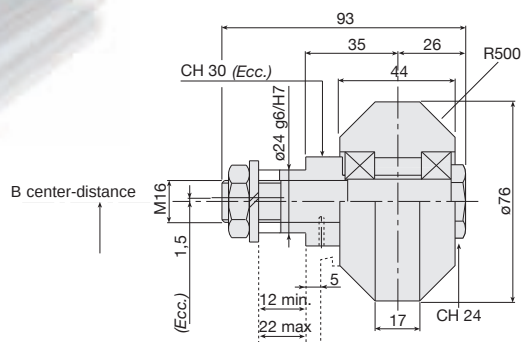

Middle version roller (radial bearings)


Type	Weight [kg]	PR [N]	PA [N]	Speed [m/s]	Code
Ecc.	0,6	800	200	2	305.0730
Conc.	0,6	800	200	2	305.0731

Heavy version roller (skew contact bearings)

Type	Weight [kg]	PR [N]	PA [N]	Speed [m/s]	Code
Ecc.	0,6	1200	500	2	305.0732
Conc.	0,6	1200	500	2	305.0733

Ø76 V-shaped self-aligning rollers


External coating with ±3 mm end float.
For parallel rail application.
To be coupled with shaped roller (see page 17).

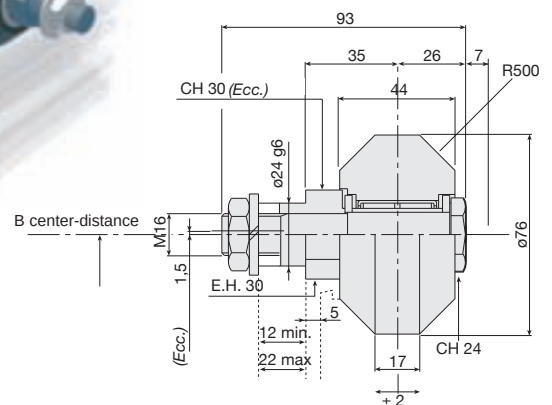

Floating roller

Type	Weight [kg]	PR [N]	PA [N]	Speed [m/s]	Code
Ecc.	0,6	1400	0	2	305.0748
Conc.	0,6	1400	0	2	305.0747



Material: high-resistance black polyamide coating.
Drilled, threaded, chromium plated steel enbloc pin.
Clamping screw not included.

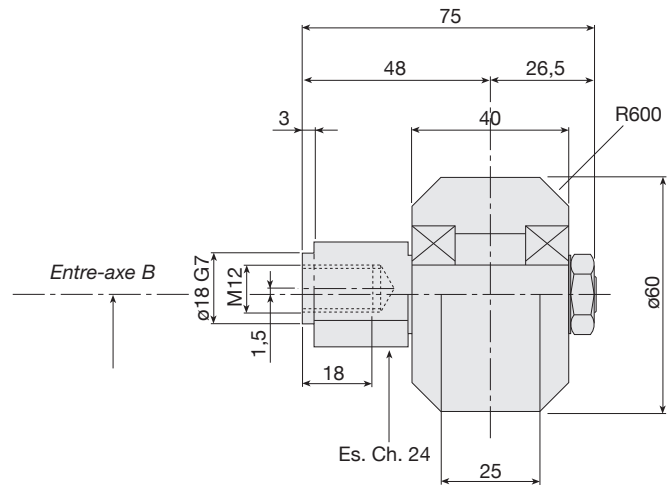

Type	Weight [kg]	PR [N]	PA [N]	Speed [m/s]	Code
Ecc.	0,5	500	120	2	305.1570
Conc.	0,5	500	120	2	305.1571

Angular support



Angular support complete with 2 V-shaped rollers for SYS1 rails. Suitable for applications with rail mounted orthogonally respect to the plate plane.

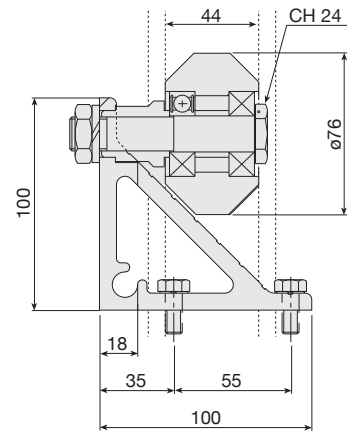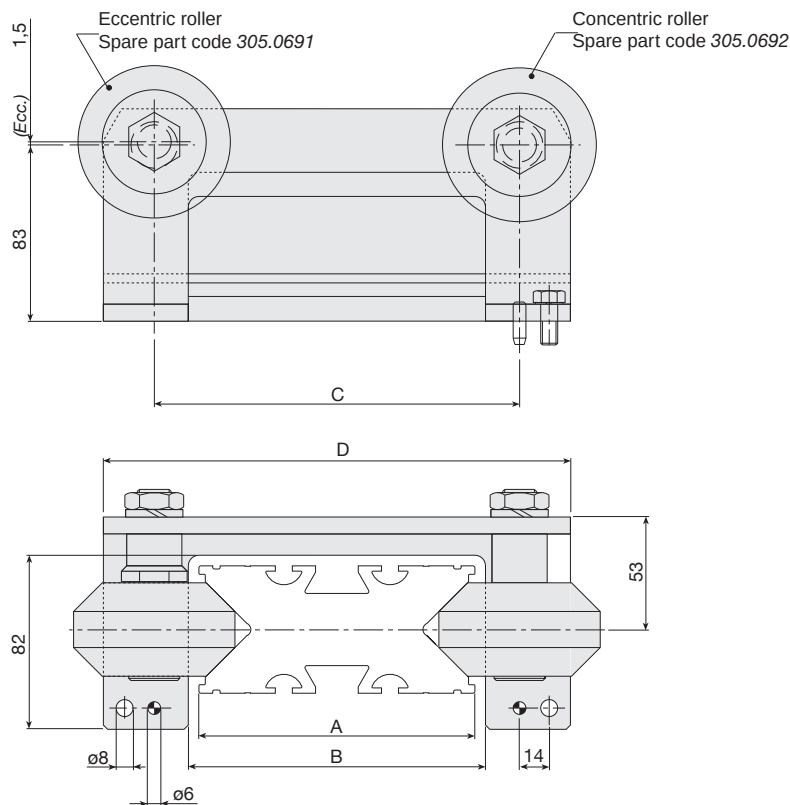

Rail	A	B	C	D	Weight [Kg]	Code
SYS1-P	100	110	148	195	1,6	304.1017
SYS1-M	130	140	172	220	1,8	304.0476
SYS1-G	180	190	222	270	2	304.0667

Code 312.1572


Ø76 shaped roller guard in black stiffened plastic material, complete with grooved scraper for guard profile. (see page 30).

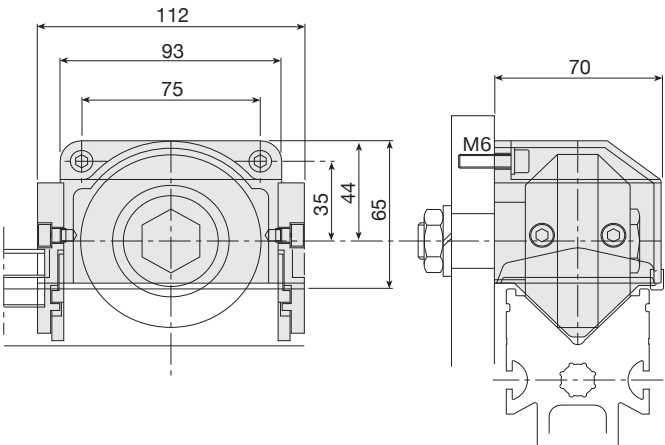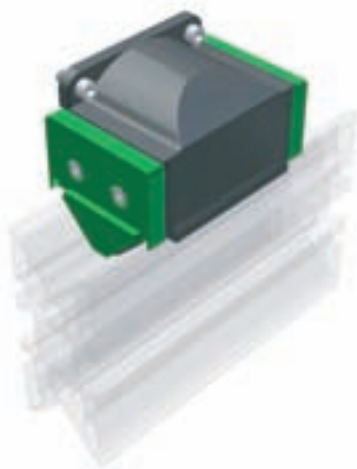

Rail connecting plates

SYS1-M connecting plate

Material: bronze coloured anodized 6082 aluminium alloy.

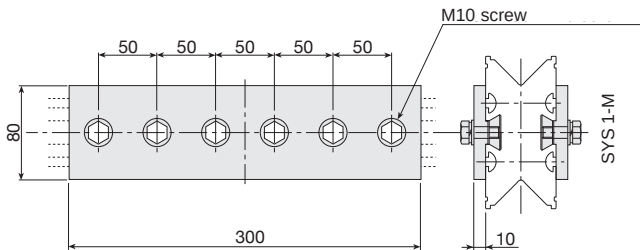



Double connecting plate

Code

Complete set	336.0198
Single plate	315.0724

SYS1-G connecting plate

Material: bronze coloured anodized 6082 aluminium alloy.

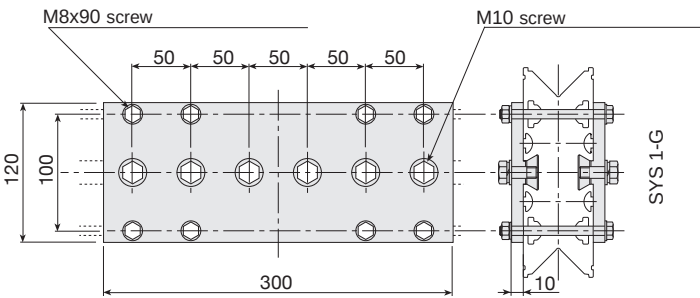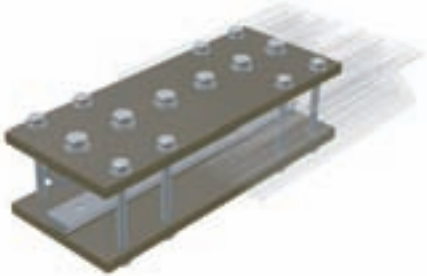

Double connecting plate

Code

Complete set	336.0188
Single plate	315.0713


N.B.: Please ask for code ...-62/... or ...-63/... to get the rail drilled (see page 31)

On demand

Plate for built in screws and nuts



Code

Double plate	336.0879
Single plate	315.0882



Accessory fixing plate

Material: bronze coloured anodized 6082 aluminium alloy.

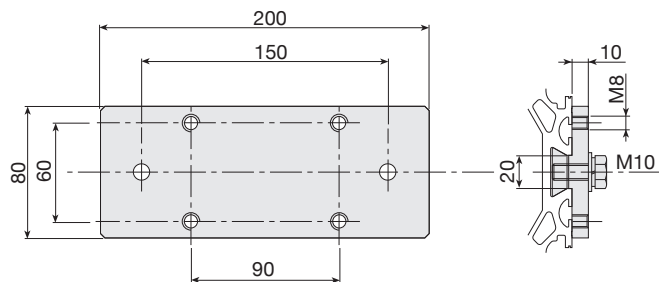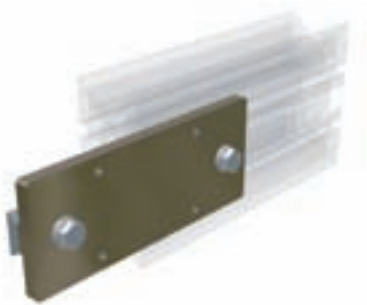

For SYS1 rail

Code

Complete set

336.0666



Single plate

315.0185

Rack fixing plate

Obtained by extrusion.

Material: natural anodized 6082 aluminium alloy.

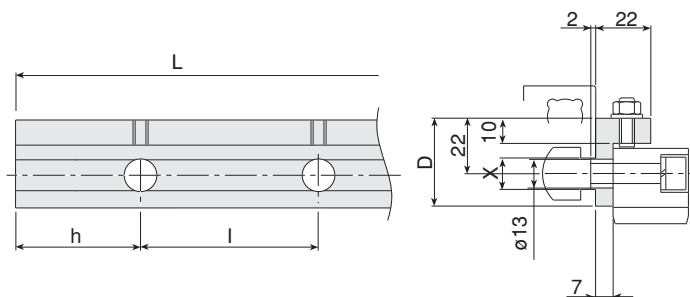


Module	D	L	I	h	Hole no.	X	Code
2	35	50	-	25	1	8	315.0005
2	35	243	126,1	56,35	2	8	215.0025
2	35	491	126,1	56,35	4	8	215.0026
3	35	50	-	25	1	8	315.0583
3	35	243	126,1	56,35	2	8	215.2368
3	35	491	126,1	56,35	4	8	215.2137
3	35	50	-	25	1	20	315.0578
3	35	243	126,1	56,35	2	20	315.0001
3	35	491	126,1	56,35	4	20	315.0002
4	39	243	125,3	57,55	2	20	315.0003
4	39	491	125,3	57,55	4	20	315.0004

Racks

Straight Teeth

- BD Normalised, milled
- TD Normalised induction-hardened teeth

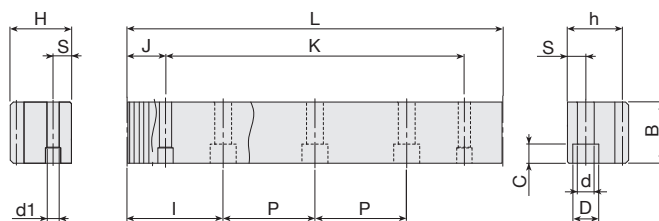


Treatment	Rs	Hardness	Quality	Precision
BD CK45	650 N/mm ²	-	Q8	0,085mm/300mm
TD CK45	650 N/mm ²	≥ HRC 56	Q8	0,085mm/300mm

Mod.	H	B	L	I	J	d	D	C	d1(H7)	S	h	P	K	Weight [kg]	Code
2	25	25	502,6	62,3	24,6	7	11	7	6	8	23	125,66	452,37	2,3	211.3429
2	25	25	1005,3	62,3	24,6	7	11	7	6	8	23	125,66	955	4,5	211.3363
3	30	30	509	63,1	18,35	9	14	9	8	9	27	127,23	471,2	3,2	211.3367
3	30	30	1017,9	63,1	18,35	9	14	9	8	9	27	127,23	980,1	6,4	211.3351
4	40	40	502,6	62,3	24,6	11	17	9	8	12	36	125,66	452,37	5,7	211.3366
4	40	40	1005,3	62,3	24,6	11	17	9	8	12	36	125,66	955	11,3	211.3349

Helical Teeth (right-hand 19° 31' 42", press. angle 20°)

- KBD CK 45: normalized, milled
- KTD CK 45: normalized, induction hardened teeth
- KFD CK 45: normalized, hardened teeth, 3 ground sides

- KSD CK 45: normalized, hardened, induction, ground teeth and sides
- KRD AISI 984: induction hardened alloyed steel, ground sides and teeth

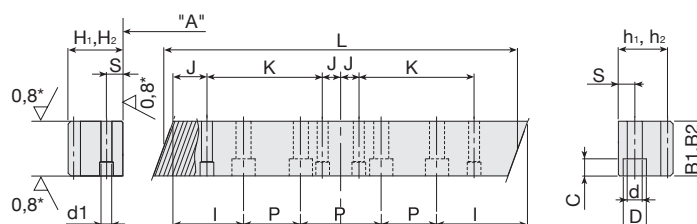

*machining of surfaces **NOT** available on version KBD - KTD

Treatment	Rs	Hardness	Quality	Precision
KBD CK 45	650 N/mm ²	-	Q8	0,085mm/300mm
KTD CK 45	650 N/mm ²	≥ HRC 56	Q9	0,085mm/300mm
KFD CK 45	650 N/mm ²	≥ HRC 56	Q9	0,05mm/300mm
KSD CK45	> 650 N/mm ²	≥ HRC 56	Q6	0,025mm/300mm
KRD AISI 9840	> 900 N/mm ²	HRC 60 c.a.	Q6	0,025mm/300mm



Mod.	H ₁	H ₂	B ₁	B ₂	L	I	J	d	D	C	d1(H7)	S	h ₁	h ₂	P	K	p.[kg]	Code
2	25	24	25	24	500	62,5	35	7	11	7	6	8	23	22	125	430	2,2	211.2429
2	25	24	25	24	1000	62,5	35	7	11	7	6	8	23	22	125	430	4,3	211.2363
3	30	29	30	29	500	62,5	35	10	15	9	8	9	27	26	125	430	3,0	211.2367
3	30	29	30	29	1000	62,5	35	10	15	9	8	9	27	26	125	430	6,1	211.2351
4	40	39	40	39	500	62,5	35	10	15	9	8	12	36	35	125	430	5,5	211.2366
4	40	39	40	39	1000	62,5	35	10	15	9	8	12	36	35	125	430	10,9	211.2349

cod. 211.2426 / BD

Teeth and treatment features

Pinion Gears

- TD Pinion with milled teeth
- ND Pinion with helical teeth
- RD Pinion with ground helical teeth



Type	Material	Surf. treat.	RS	Quality	Hardness
TD	CK45	induction-hardened	650 N/mm ²	Q8	HRC 56
ND	Special steel	tempered and hardened	>900 N/mm ²	Q8	HRC 50
RD	16MnCr5	temp. induction-hardened	>900 N/mm ²	Q7	HRC 60

Helical tooth pinion

mod.	p.[kg]	Z	Øp	Øi	b	x	Code
2	0,2	21	44,56	22	28	56	201.0005
2	0,6	30	63,66	22,30,32	28	56	201.0012
3	0,8	20	63,66	22,25,30,32	28	65	201.0007
3	1,4	28	89,13	25,30,32	28	65	201.0013
4	1,5	18	76,39	32	40	75	201.0009
4	2,8	25	106,10	55	40	80	201.0014


Straight tooth pinion

mod.	p.[kg]	Z	Øp	Øi	b	x	Code
2	0,3	22	44	15,20,25	20	55	201.0004
3	0,9	21	63	25,30	30	65	201.0006
4	1,7	19	76	30,35	40	75	201.0008

Cod. 201.0008 / TD / 25 — Øi

Teeth and treatment features


Slot details

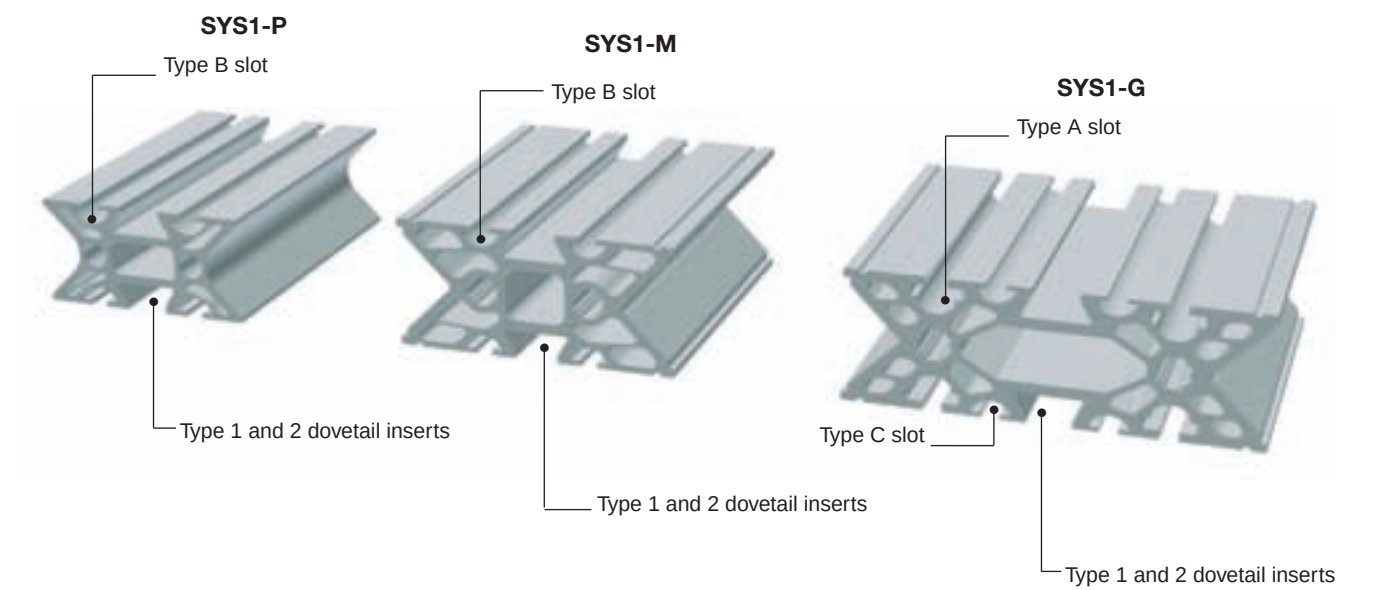

Dovetail inserts


Dovetail insert


Material: C40 blued - M8 and M10 holes.
Special lengths on demand.

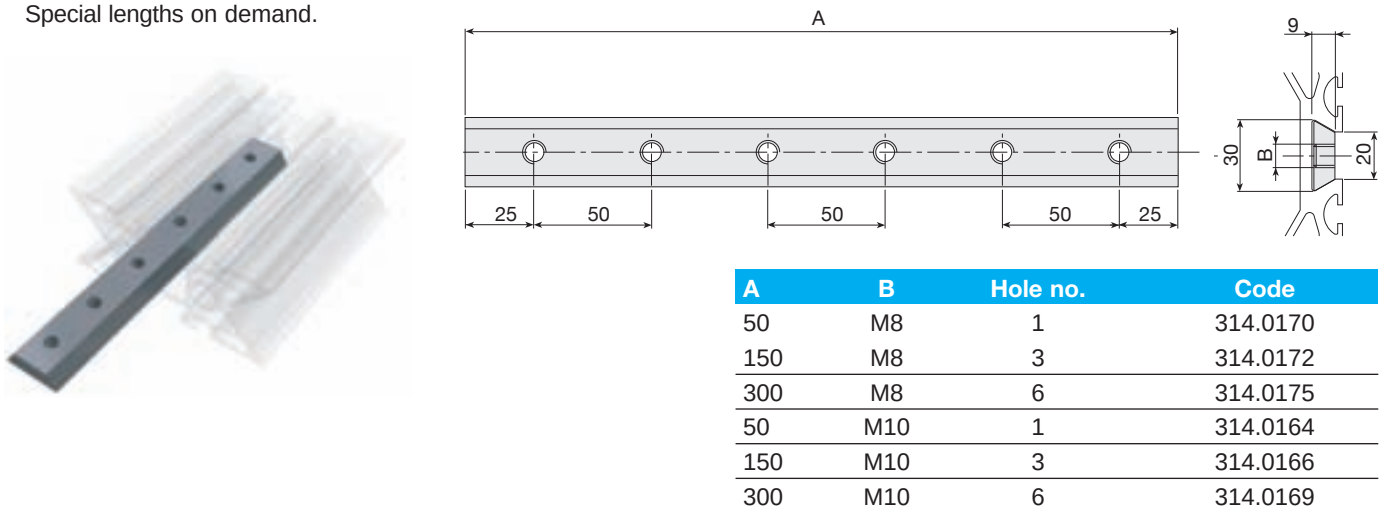

Dovetail centering insert (type 2)

NB: All dovetail centering inserts can be frontally inserted into the bigger slot.

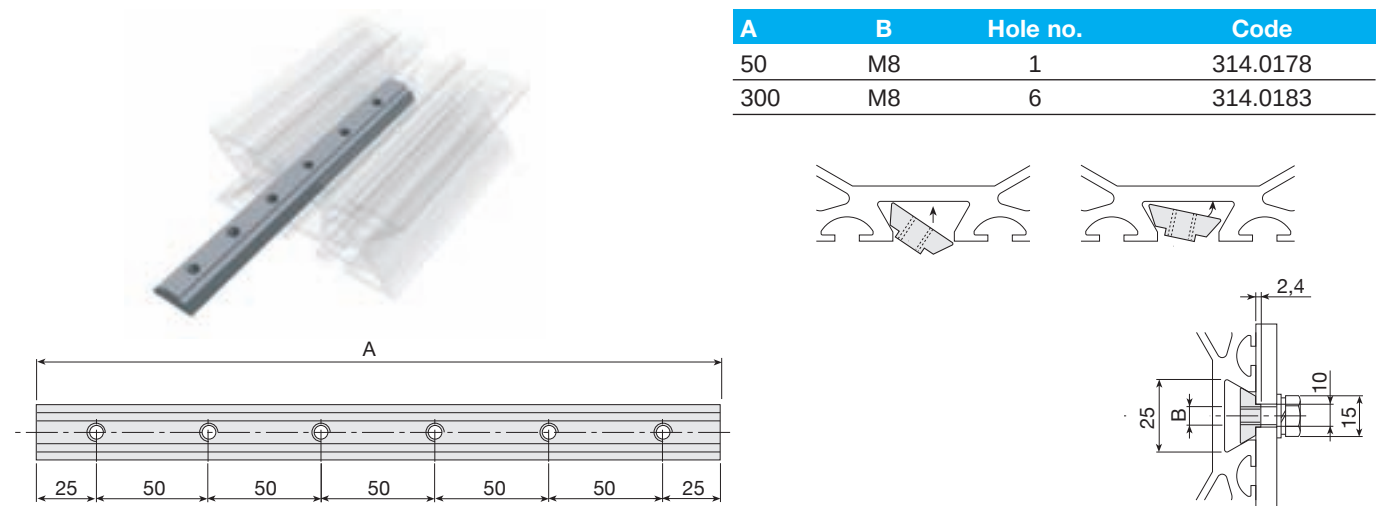

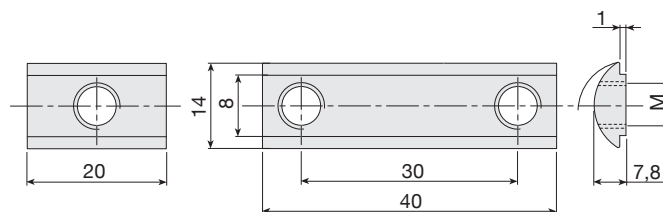



Thread	Hole no.	L	Code
M5	1	20	A32-55
M6	1	20	A32-65
M8	1	20	A32-85
M6	2	40	A32-67

Square nuts and spring



Also suitable for profiles **STATYCA**, **VALYDA**, **LOGYCA**, **PRATYCA** and **SOLYDA**.

Material: galvanised steel.

Important: inserts must be inserted into the longitudinal slots before assembling.



Square nut

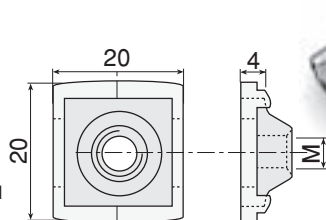


Plastic compound spring

Thread	Code 18x18	Code
Spring	101.0732	
M4	209.0031	209.0023
M5	209.0032	209.0019
M6	209.0033	209.1202
M8	209.0034	209.0467

Flat inserts

Material: zinc plated steel.

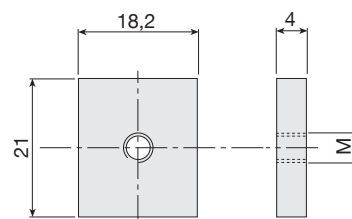


Thread	Code
M4	A32-40
M5	A32-50
M6	A32-60
M8	A32-80
Spring	211.1061

Spring nuts


For universal assembly. Can be frontally inserted into the slot, even after assembly. Material: zinc plated steel.

Thread	Code
M3	AC31-30
M4	AC31-40
M5	AC31-50
M6	AC31-60
Spring	AC31-90

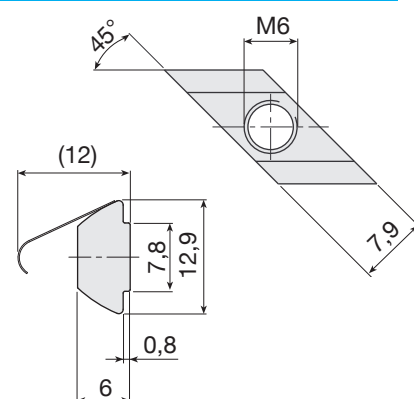

T-bolts


Suitable for 8mm slots. Can be frontally inserted, even after assembly. Material: zinc plated steel.

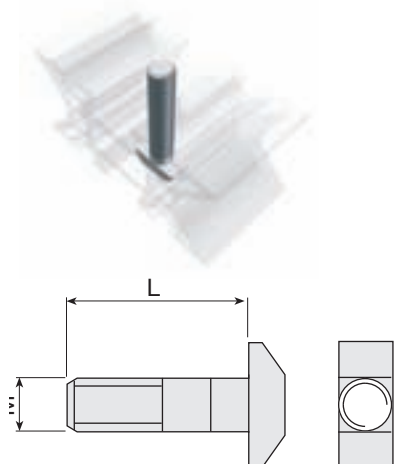

M x L	Code
M8x20	A35-20
M8x25	A35-25
M8x30	A35-30
M8x40	A35-40
M8x60	A35-60

Half-round threaded inserts

Material: zinc plated steel.

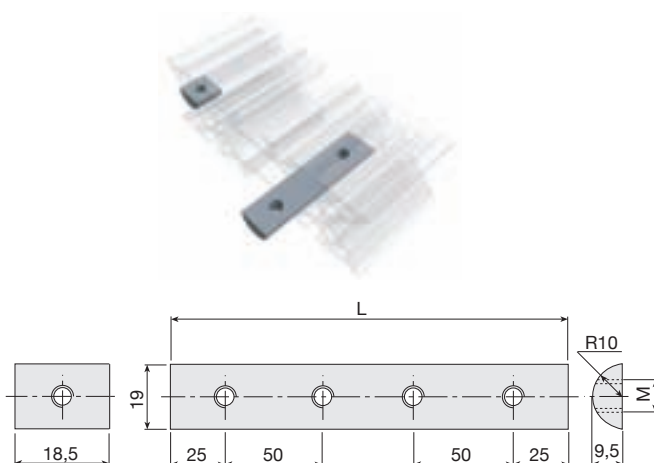


Thread	Hole no.	L	Code
M6	1	18.5	A32-61
M8	1	18.5	A32-81
M8	2	80	A32-82
M8	3	150	A32-83
M8	4	200	A32-84
M8	5	250	A32-89
M8	6	300	A32-86
M8	7	350	A32-87

Type B-C slots

Steel threaded inserts


Material: zinc plated steel; harmonic steel spring.

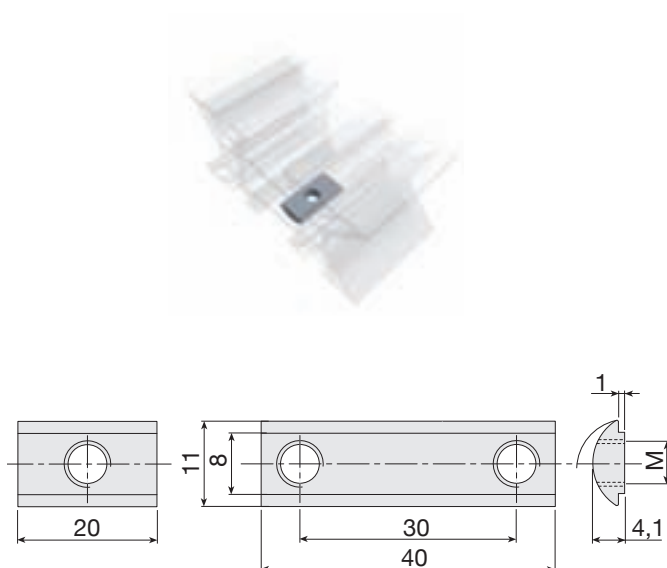

Thread	Hole no.	L	Code
M5	1	20	B32-55
M6	1	20	B32-65
M8	1	20	B32-85
M6	2	40	B32-67

Flat inserts


Material: zinc plated steel.

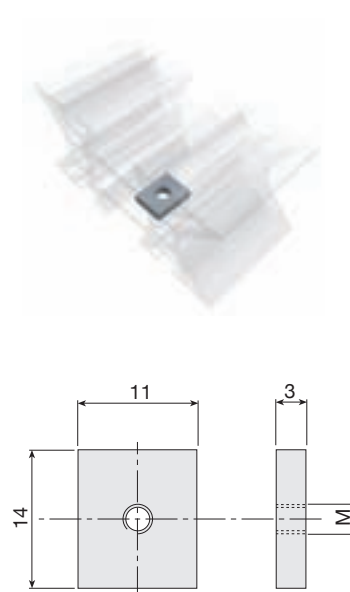

Thread	Code
M3	B32-30
M4	B32-40
M5	B32-50
M6	B32-60
Spring	211.1077

Spring nuts


For universal assembly. Can be frontally inserted into the slot, even after assembly. Material: zinc plated steel.

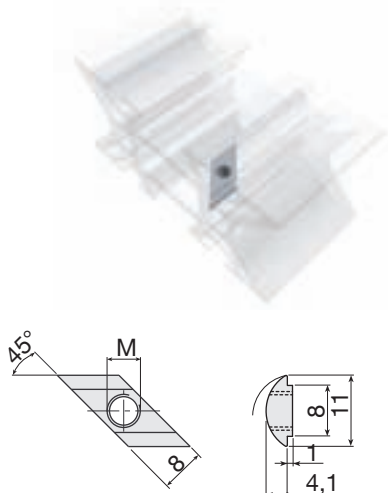

Thread	Code
M3	BD31-30
M4	BD31-40
M5	BD31-50
M6	BD31-60
Spring	BD31-90

T-bolts

Suitable for 8mm slots. Can be frontally inserted, even after assembly. Material: zinc plated steel.

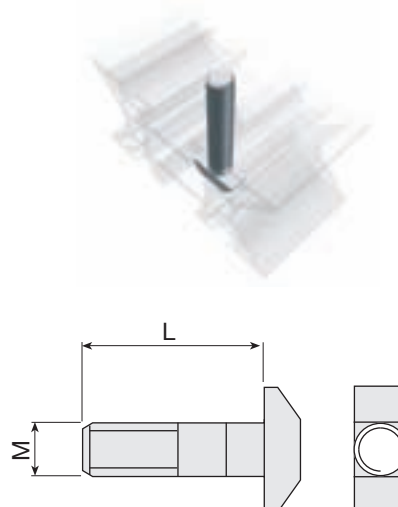

M x L	Code
M6x15	B35-15
M6x20	B35-20
M6x30	B35-30
M6x40	B35-40


Threaded Inserts

Material: chromium plated steel.

Ask for M14 or M16 thread.

SYS1-P : M14 thread (B33-.. series)

SYS1-M,G: M16 thread (A33-.. series)

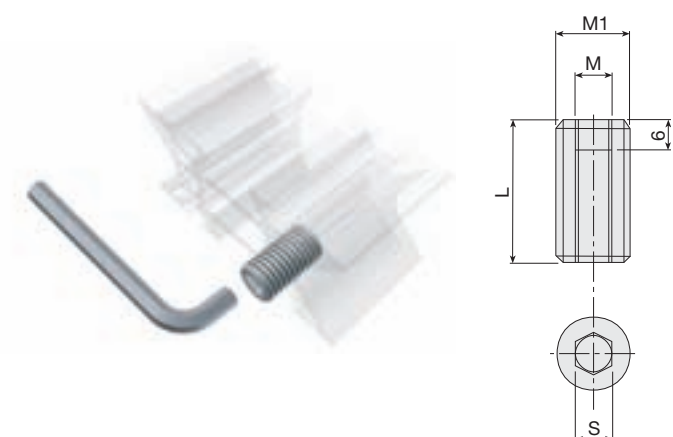


Rail	M1	M	S	L	Code
SYS1-P	14	10	10	25	B33-21
SYS1-P	14	8	8	25	B33-28
SYS1-P	14	6	6	25	B33-26
SYS1-M / G	16	10	10	25	A33-20
SYS1-M / G	16	8	8	25	A33-28
SYS1-M / G	16	6	6	25	A33-26

Assembly brackets

Through hole bracket


Through hole bracket for mounting additional equipment.
Material: natural anodized 6060 aluminium alloy.

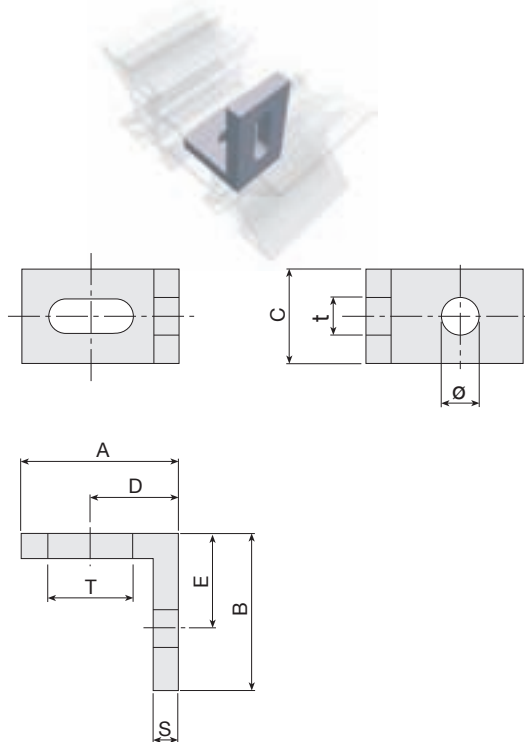

A	B	C	D	E	S	T x t	Ø	Code
45	45	20	25	25	5	15 x 6.5	6	A30-76
35	25	20	19	15	5	20 x 6.5	4	A30-54
35	25	20	19	15	5	20 x 6.5	5	A30-55
35	25	20	19	15	5	20 x 6.5	6	A30-56
25	25	15	14	15	4	13.5 x 5.5	3	B30-53
25	25	15	14	15	4	13.5 x 5.5	4	B30-54
25	25	15	14	15	4	13.5 x 5.5	5	B30-55
25	25	15	14	15	4	13.5 x 5.5	6	B30-56

Threaded hole bracket


Threaded hole bracket for mounting additional equipment.
Material: natural anodized 6060 aluminium alloy.

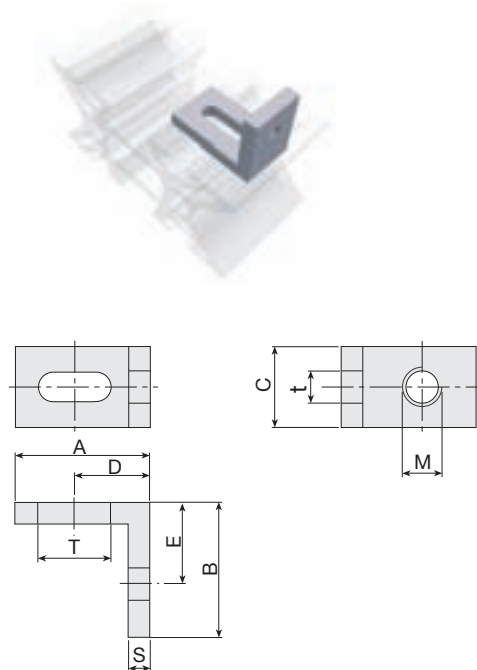

A	B	C	D	E	S	T x t	M	Code
45	45	20	25	25	5	15 x 6.5	M6	A30-86
35	25	20	19	15	5	20 x 6.5	M4	A30-64
35	25	20	19	15	5	20 x 6.5	M5	A30-65
35	25	20	19	15	5	20 x 6.5	M6	A30-66
25	25	15	14	15	4	13.5 x 5.5	M3	B30-63
25	25	15	14	15	4	13.5 x 5.5	M4	B30-64
25	25	15	14	15	4	13.5 x 5.5	M5	B30-65
25	25	15	14	15	4	13.5 x 5.5	M6	B30-66

Accessory fixing bracket


Bracket mainly used to fix accessories and to reinforce frames realised with profiles.
Material: natural anodized 6060 aluminium alloy.

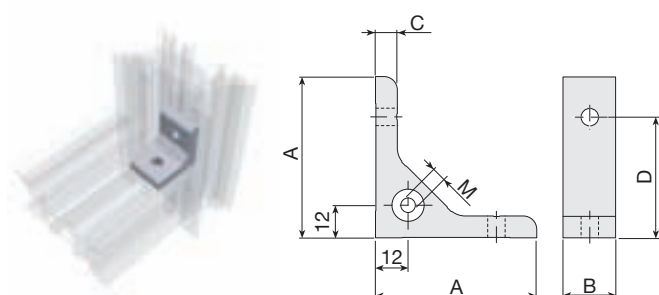

A	B	C	D	E	Ø	M	Code
60	20	8	45	-	6,5	-	B30-10
60	20	8	45	-	6,5	M6	B30-20
60	30	8	45	-	9	-	A30-10
60	30	8	45	-	9	M6	A30-20
38	30	8	25	-	9	-	A30-00
31	20	6	20	-	6,5	-	C30-00


Code 213.0756

Bracket for rail connection.
Material: natural anodized 6060 aluminium alloy.

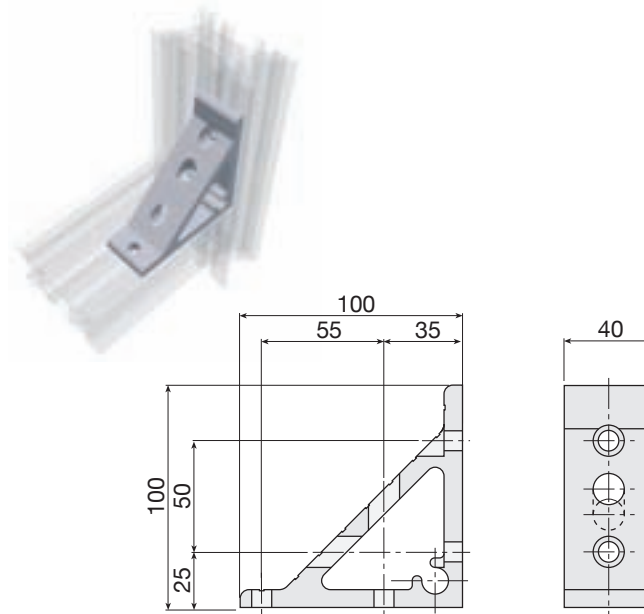

Threaded hole bracket

Bracket for rail connection.
Material: natural anodized 6060 aluminium alloy.

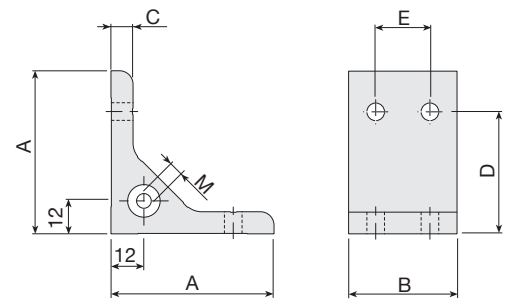


A	B	C	D	E	Ø	M	Code
38	80	8	25	50	9	-	A30-02
31	60	6	20	40	6,5	-	C30-02

Filler strips

Aluminium filler strips


Aluminium filler strips L=1000 mm are used to blank out the longitudinal SYS1-G "A" slots.



Description	Code
Black	A39-10
Natural anodized	A39-10 ALU

PVC filler strips



Grey or black PVC filler strips L= 5000mm suitable for any 8 mm longitudinal slots.



Description	Code
Grey	A39-25/5000
Black	A39-26/5000

Guide end parts

Guide end parts for the rail fitting in the roller slides (degree 15°). Yellow plastic material (hardness: 95° Shore), complete with assembling accessories.

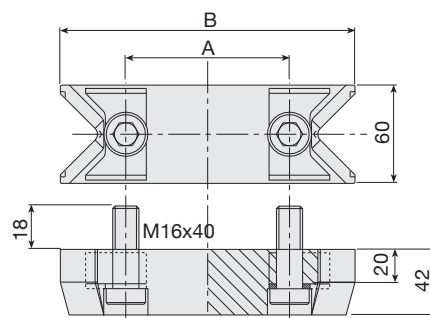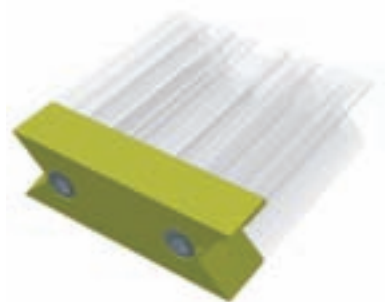


Rail	A	B	Code
SYS1-P	50	100	336.1069
SYS1-M	50	130	312.0159
SYS1-G	100	180	312.0158

NB: holes on rail ends should be threaded M16.

End caps

Green polymer material, complete with assembling accessoires.

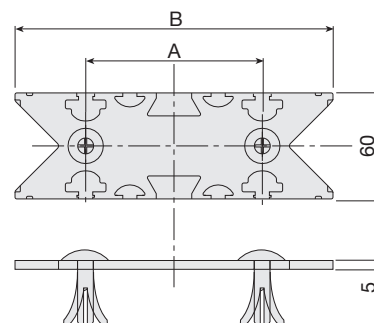


Rail	A	B	Code
SYS1-P	50	100	312.0846
SYS1-M	50	130	312.0679
SYS1-G	100	180	312.0680

Rail Extension Kits

Code 336.0597

Complete group for SYS1-G and SYS1-M rail extension (without side projections on the rail).


Please ask for code ...-60/... or ...-61/... to get the rail end drilled (see page 31).

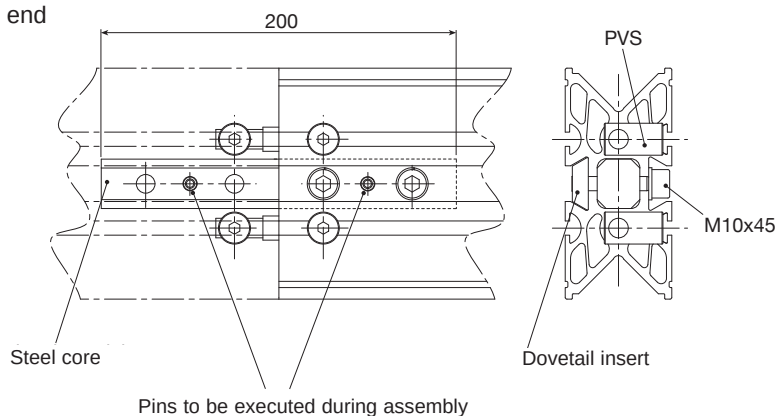

PVS® connectors are used to mount plates or accessories to the rail end.
They are manufactured in zinc plated steel.
To use PVS® connectors, rails should be drilled.
Please ask for machining code 33 or 34 (see page 31).

Threaded connectors


PVS® for rail / plate at 90° assembly.

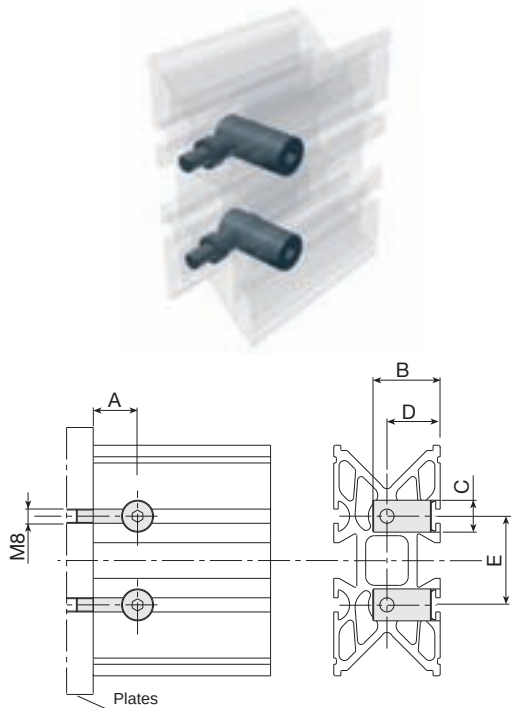

Rail	A	B	C	D	E	Code
SYS1-P	25	33	15	25	50	B20-60
SYS1-M	25	38	18	30	50	A20-60
SYS1-G	25	38	18	30	100	A20-60

Standard connectors


PVS® for rail / rail at 90° assembly.

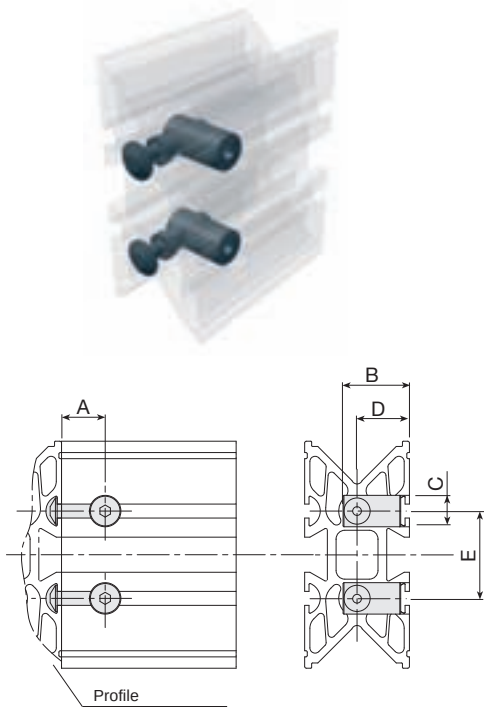

Rail	A	B	C	D	E	Code
SYS1-P	25	33	15	25	50	B20-90
SYS1-M	25	38	18	30	50	211.1617
SYS1-G	25	38	18	30	100	A20-90

Rail extension connectors

PVS® for rail / rail assembly.

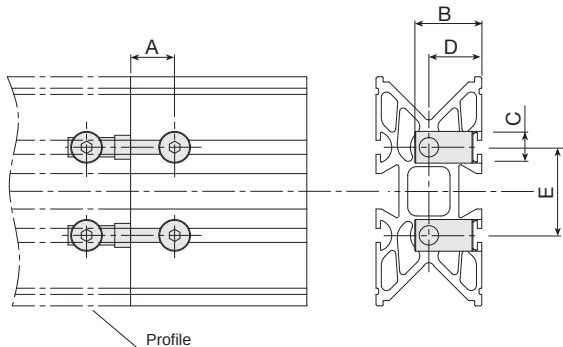



Rail	A	B	C	D	E	Code
SYS1-P	25	33	15	25	50	B24-00
SYS1-M	25	38	18	30	50	A24-00
SYS1-G	25	38	18	30	100	A24-00

Guard profiles

Guard profile code 302.0147 / length

Material: bronze anodized aluminium alloy (max. L=7 m)


*Guard profile longer than 3 m should be mounted with a support plate in intermediate position.

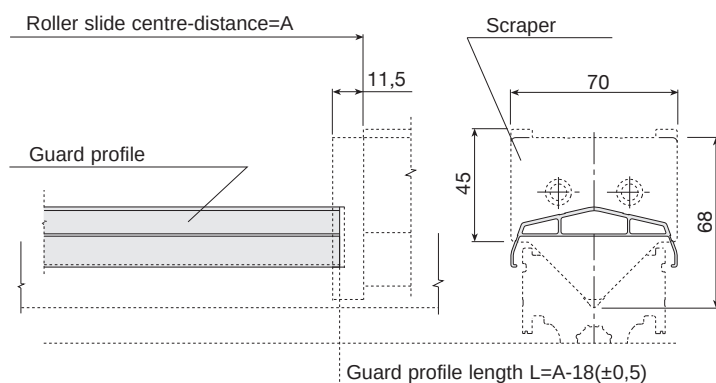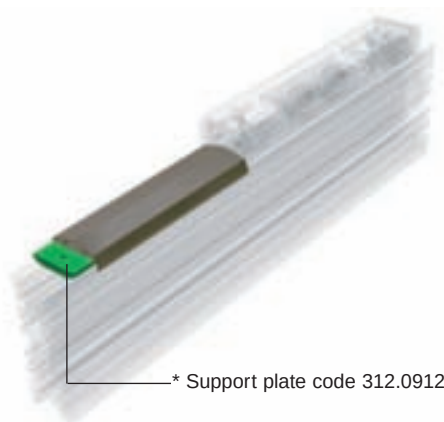

Spring scraper code 312.1026

With grooved seat for guard profile.


Material: green coloured plastic.

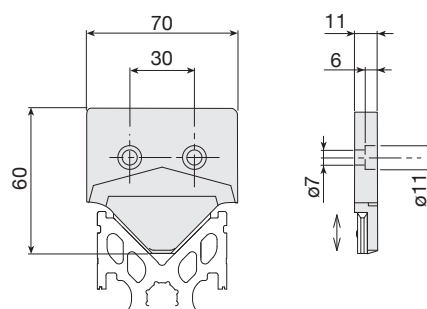

Belt assembly

This device is used to fix the toothed belt to the roller slide and is provided with toothed plate and special scraper.


N.B. Please ask for roller slide presetting.

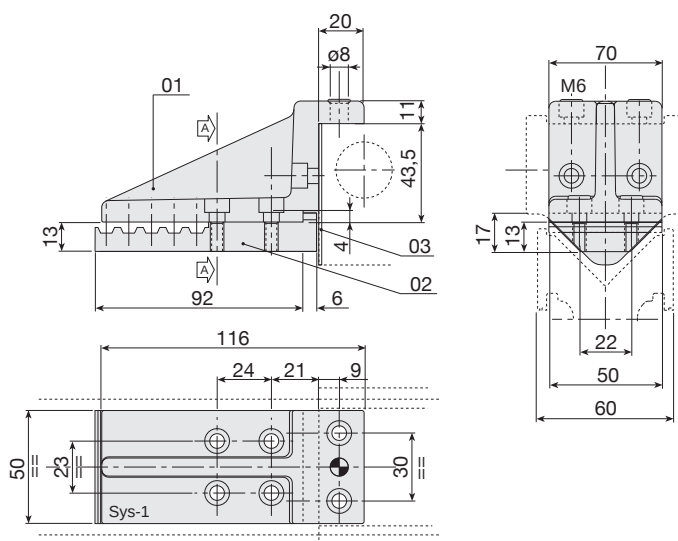

Complete belt fixing group Code 336.0007

01	Belt fixing bracket	313.0884
02	Toothed plate for 50AT10 belt	315.0885
03	Special scraper (1,5 mm thickness)	312.0935

Standard machining on rails

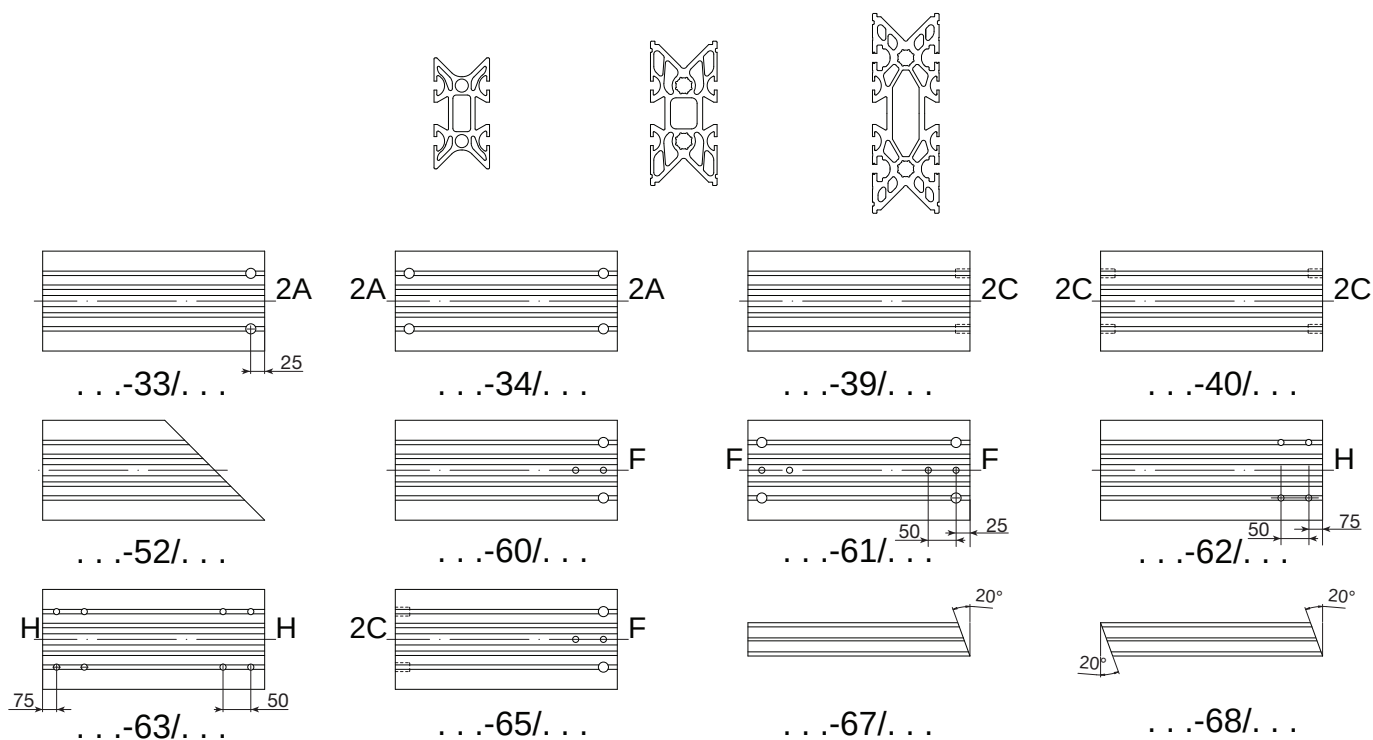


- A** Milling for Ø15 or Ø18 PVS® (see rails)
- C** M14 or M16 threads (see rails)
- F** Drilling to rails connection, code 336.0597
- H** Drilling to rails connection, code 336.0597

ORDER CODE EXAMPLE:

2 - 3020001 - 60 / 2500


- Required length
- Machining code
- Rail code (see page 8)
- No. of ordered rails

Special application

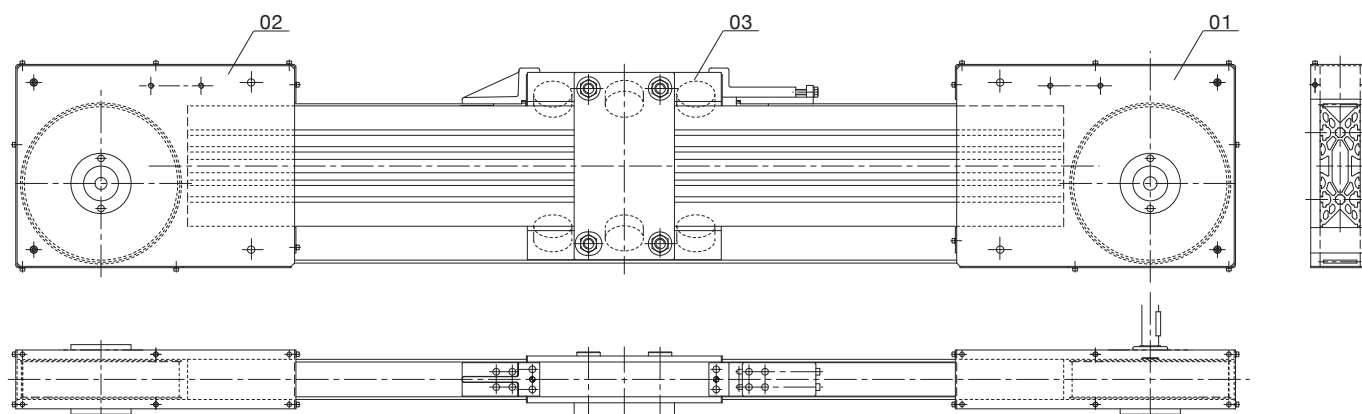

Components	Code
01 Drive head	336.0003
02 Driven head	336.0004
03 Complete carriage	336.0005

Assembly solutions

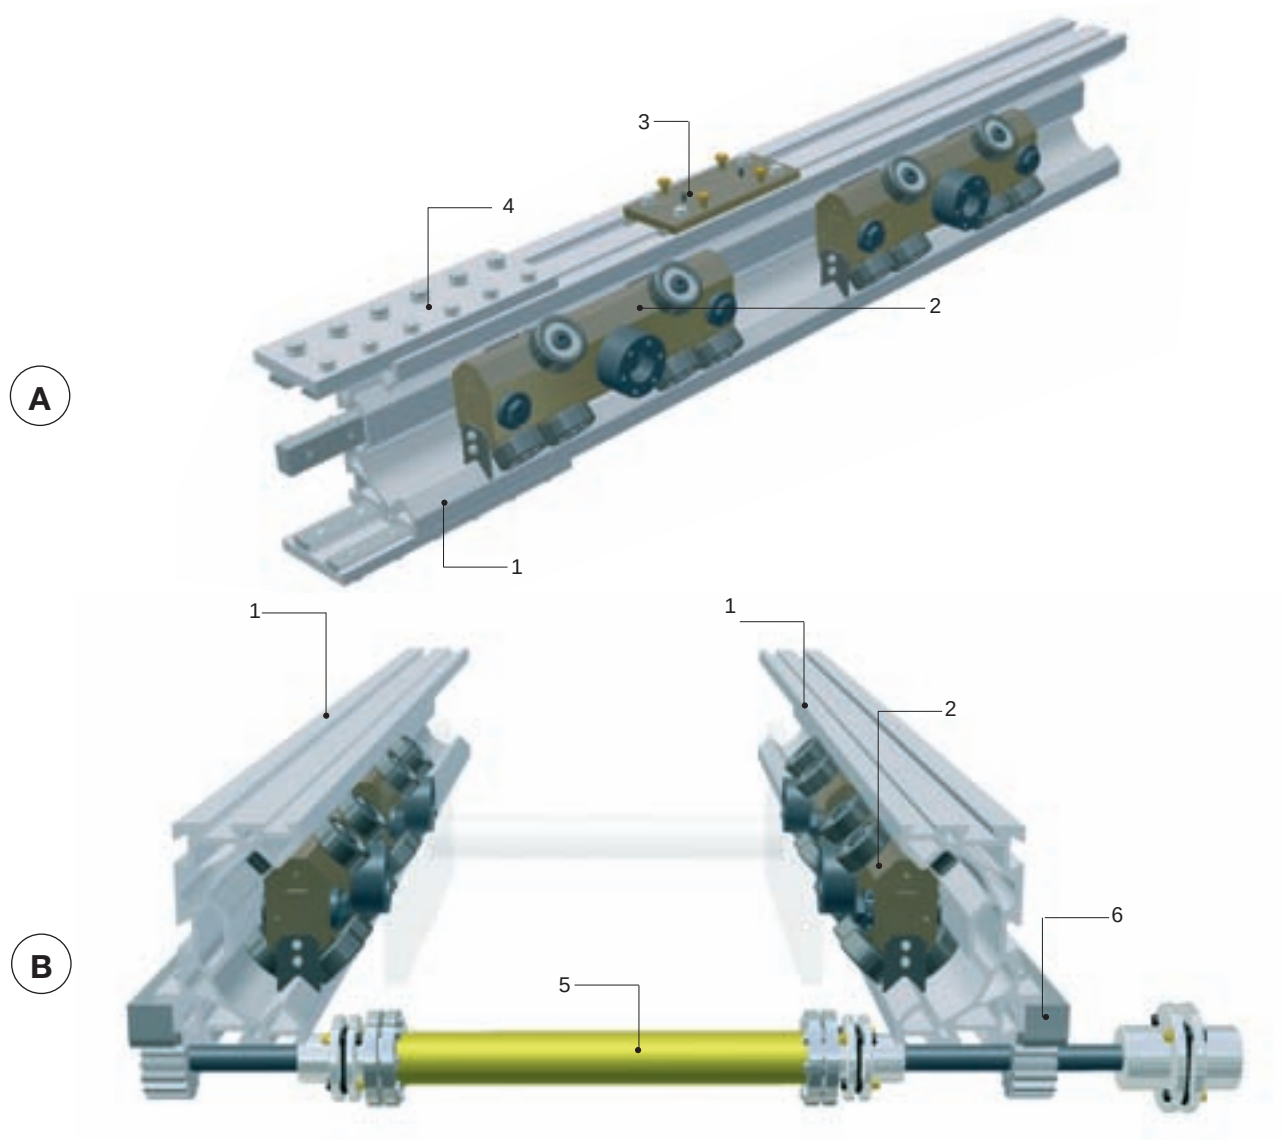

A assembly:


This assembly example represents an axis composed of a single rail. With this configuration you can keep the roller slides steady and move the rail by using pneumatic cylinders, pinion/rack or belt drive systems (not shown here).

B assembly:

This assembly example represents a system composed of 2 pinion/rack-operated moving rails. It is mainly used to build lift and shift linear units for metal sheet handling.

Legend:

- 1 – SYS 2 rail (see page 35)
- 2 – Self-aligning roller slide (see page 36)
- 3 – Accessory fixing set (see page 38)
- 4 – Rail extension plate set (see page 38)
- 5 – Connecting shaft (see Modline and Tecline catalogue)
- 6 – Racks and fixing plates (see page 20-21)

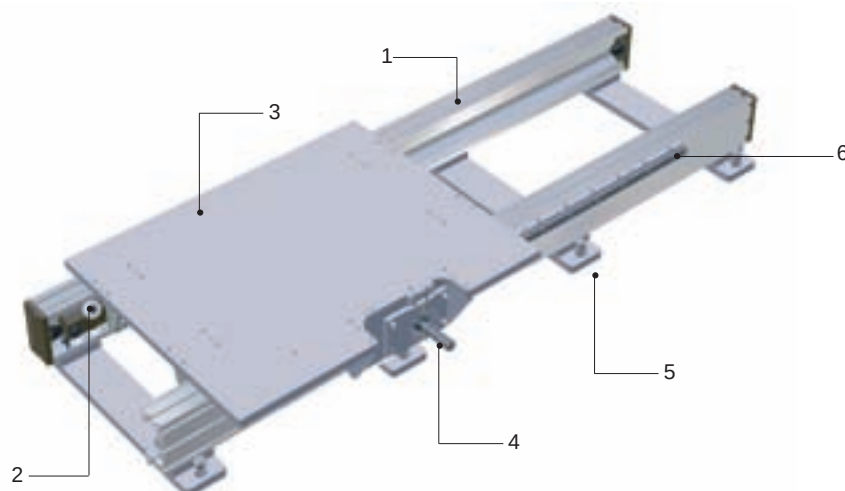


This assembly example represents a slide composed of a carriage (plate and 4 roller slides complete with welded supports) running on 2 profiles that act like a rail. In this configuration the self-aligning roller slides are mounted on the rack opposite site (see page 36), to compensate any stress caused by rail parallelism errors. This system is mainly used as robot-holder, elevators and palletisers.

Legend:

- 1 – SYS2 rail (see page 35)
- 2 – Self-aligning roller slide (see page 36)
- 3 – Base plate
- 4 – Gearbox assembly set
- 5 – Risers
- 6 – Racks and fixing plate (see page 20-21)

Overview

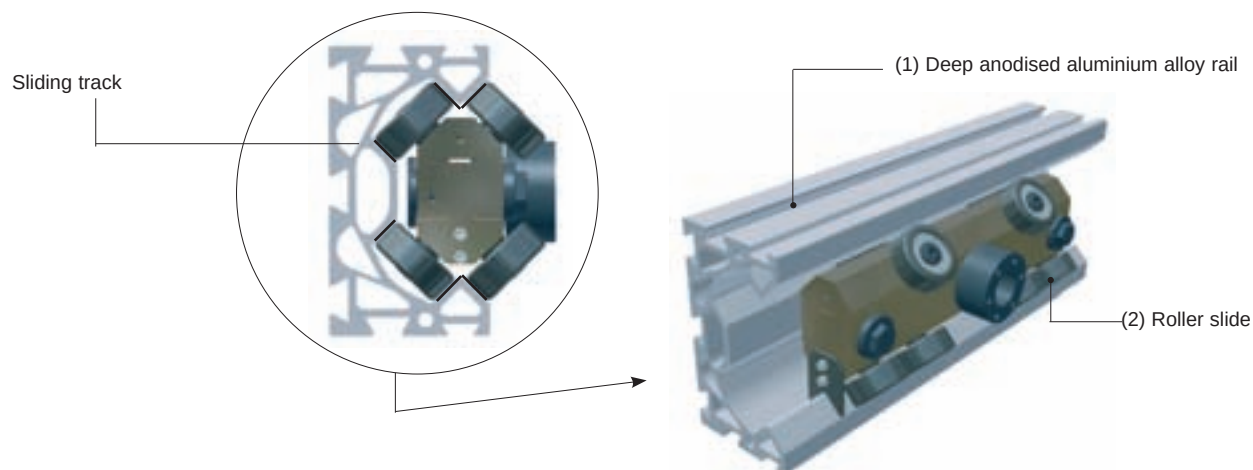


A rugged aluminium C-shaped rail (1) is at the basis of the SYS2 translation system. The linear motion is made through 8-12- or more roller slides running on the hardened inside surfaces. The rail section allows the full rollers and sliding surfaces protection; moreover, an additional lateral guard gives the rail a completely closed rectangular section. Thanks to its particular features, this system can also be used as slide handlings, elevators, palletizers and Cartesian robots.

Roller slide description

The main body consists of two joined high-resistance light alloy components (1-2). It is provided with double-sphere ring gear angular contact bearings, neoprene O-rings, to ensure the lowest friction coefficient.


Lubrication is not required for the standard version, giving a great advantage to the plant operating efficiency.

The roller external surface is covered by a low-friction plastic material, which guarantees the maximum noise reduction and lowest possible rail wear.

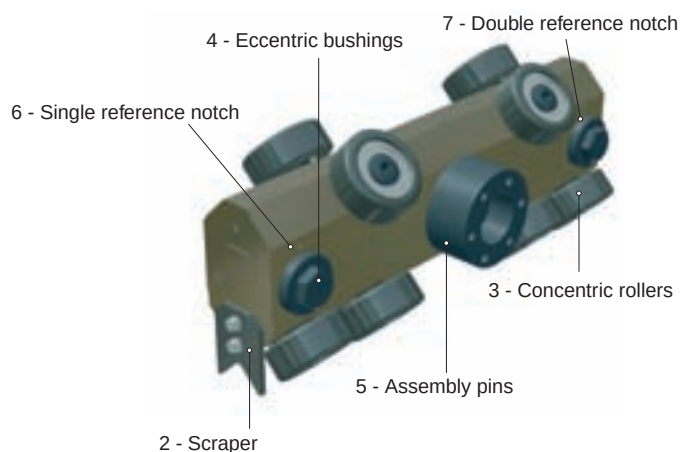

Roller slides can be supplied in two solutions: 16- and 20-rollers with 2 assembly pins (length: 480 and 600 mm) and scraper (4) or 8- 12-rollers with just 1 central assembly pin, which allows a well balanced load distribution on each bearing through a slight oscillation.

A self-aligning roller slide version with 1 locking pin is also available.

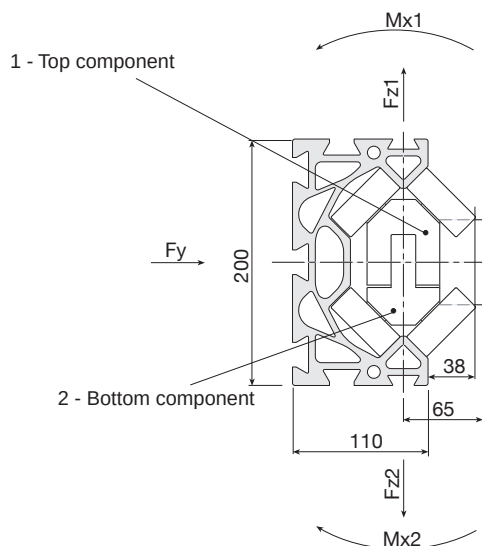

Assembly specifications

A - Features

The sliding system generally foresees 2 assembly possibilities: moving rail and fixed roller slides (example 1) or fixed roller slides and moving rail (example 2).

If the application requires fixed rails and moving carriage, it is very important to pay particularly attention to the rail alignment while assembling, in order to avoid any additional loads on the rollers, that could limit their life.

The max. possible tolerance between 2 rails is $\pm 1\text{mm}$.

In this case is highly recommended to use self-aligning roller slides. If the sliding system is pinion/rack operated, check that slipping washers (see page 36) are removed on the roller slides fixed on the rack opposite side.

Rail connecting systems are available on demand.

B - Alignment

Sliding tracks have to be perfectly aligned.

C - Rack assembly

With rack drive it is very important to guarantee exact parallelism between the sliding system and the rack axis. (rack and fixing plates on page 20-21).

D - Roller slide assembly and adjusting

The roller slide can be assembled and disassembled through the rail groove.

The correct backlash adjustment between rollers and rail sliding tracks must be made along the rail vertical axis, acting on the roller slide eccentric bushings (4).

It is recommended to adjust any backlash near each support, to avoid possible rail deformations caused by roller preloading.

An optimum condition for preloading is reached when rollers without any load, touching the sliding track, are not blocked and you can easily let them roll on the track just by hand.

For the simultaneous assembly of several roller slides in one system, it is possible that not all rollers can remain in contact with rails, because of the natural deformation of the rails.

In this case it is not advisable to act on the eccentric pins.

It is important to check the smoothness capacity of the whole system, which should be high; if not, loosen the pins and repeat the adjustment.

Please follow these instructions to disassemble roller slides: loosen the screws and the eccentric bushings (4) placed on the roller slide end, and the assembly pin CH24 bolts (5); free the roller slide from the equipment (welded parts or plates) and take it off; remove pins and bushings; split the two roller slide parts (1 and 2) and remove them from the rail.

To assemble the roller slide please follow the instructions in reverse order. Before blocking the CH24 bolts, adjust the roller slide by rotating counter-clockwise the eccentric bushing marked with the single notch (6) until all rollers touch the rail.



Do the same with double notched bushing. Repeat the previous fine-adjustment, by paying attention that rollers without any load can easily slide on the track just by hand.

SYS2 rail has been developed to obtain a very strong asymmetrical section and limited on load structural deformation. It is provided with slots that can be used with a wide range of accessories.

The rail surface is chemically treated, in order to obtain a great hardness above all on roller sliding tracks, guaranteeing its long-life.

Specifications	
Material:	hard. and temp. light alum. alloy (AlMgSi)
Quality:	F = 25
Tolerances:	1/2 UNI 3879
Tear resistance:	R = 245 - 270 N/mm ²
Yelding point:	Rp = 215 - 240 N/mm ²
Hardness:	HB = 70 - 90
Surface treatment: deep anodising (bronze coloured) , thickness > 0,55 mm	


SYS2 rail	Code 302.0539	
Size	200x110	mm
Weight	16,8	Kg/m
Max. length	7,5	m
Moment of inertia X (Ix)	31.900.000	mm ⁴
Moment of inertia Y (Iy)	6.600.000	mm ⁴
Bending section mod. (Wx)	319.000	mm ³
Bending section mod. (Wy)	120.000	mm ³
*Holes for M14 thread and PVS® connectors		

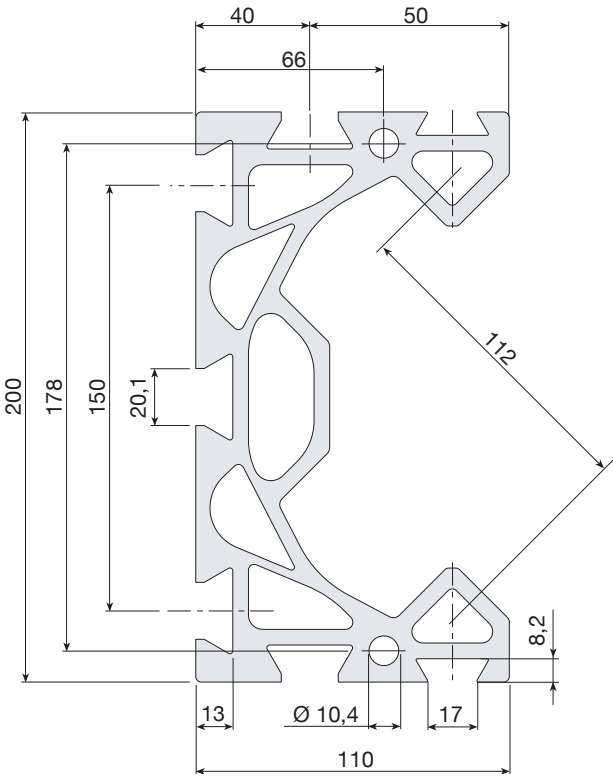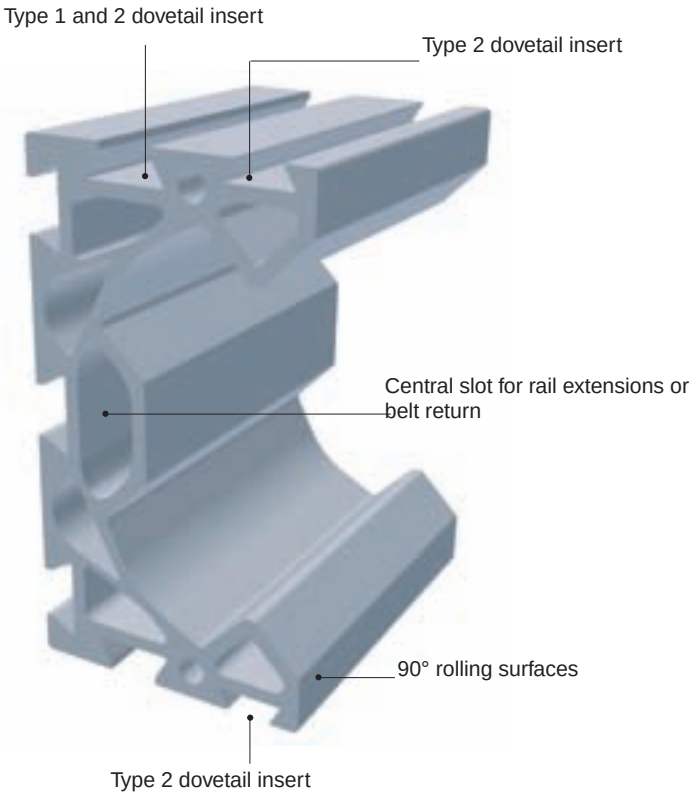


Roller slide size

Code 304.0833

8-roller slide, assembly with 1 self-aligning pin.

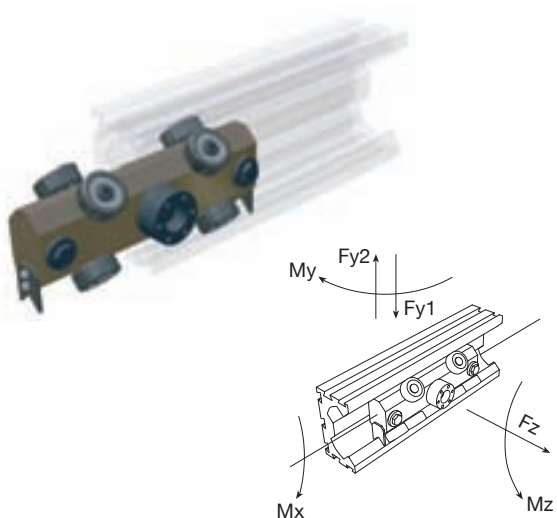


	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_{y1} [N]	F_{y2} [N]	F_z [N]
SYS2	293	363	-	3950	3950	3950

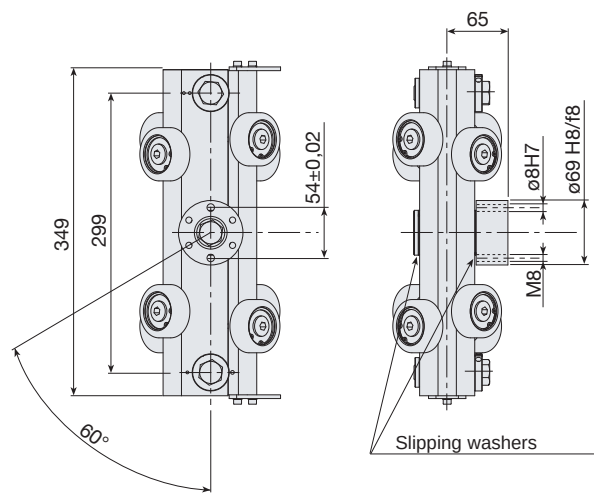


Specifications	
Support pins no.	1
Adjusting bushings no.	2
Rollers no.	8

Code 304.0001

12-roller slide, assembly with 1 self-aligning pin.

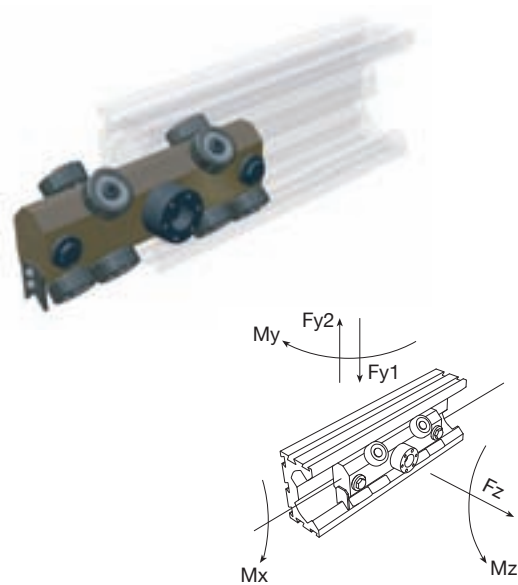



	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_{y1} [N]	F_{y2} [N]	F_z [N]
SYS2	320	363	-	6320	3950	3950

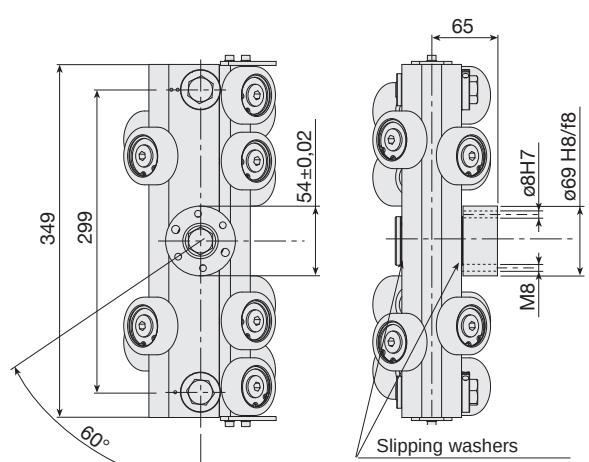

Specifications	
Support pins no.	1
Adjusting bushings no.	2
Rollers no.	12

Code 304.0911

16-roller slide, fixed assembly with 2 pins
centre-distance: 200 mm

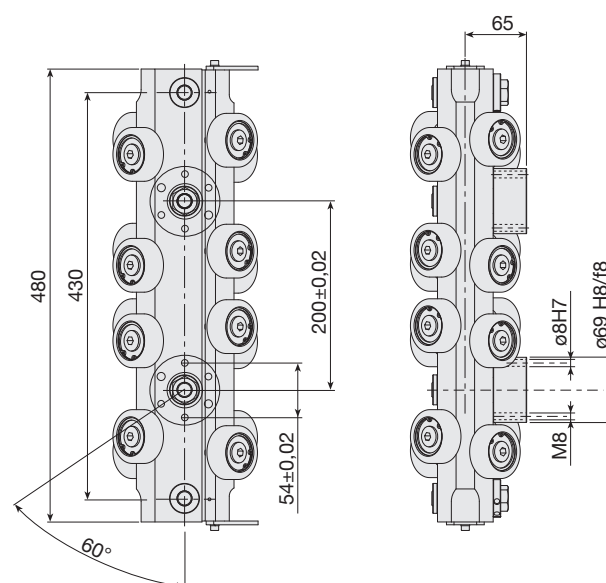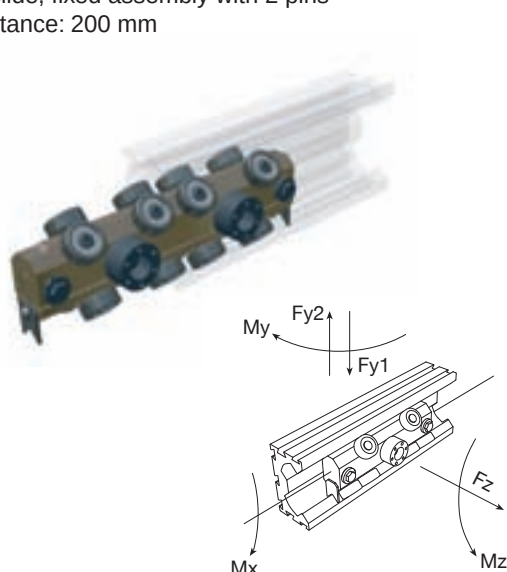



	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_{y1} [N]	F_{y2} [N]	F_z [N]
SYS2	470	620	705	6320	6320	6300

Specifications

Support pins no.	2
Adjusting bushings no.	2
Rollers no.	16

Code 304.0902

20-roller slide, fixed assembly with 2 pins
centre-distance: 430 mm

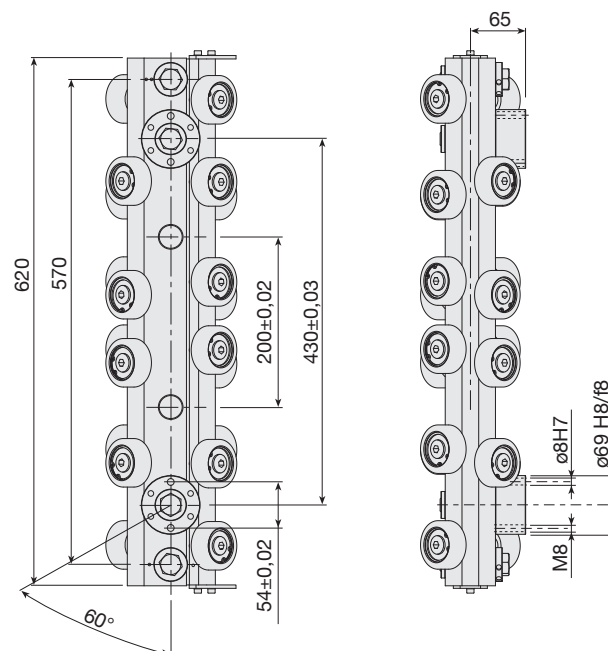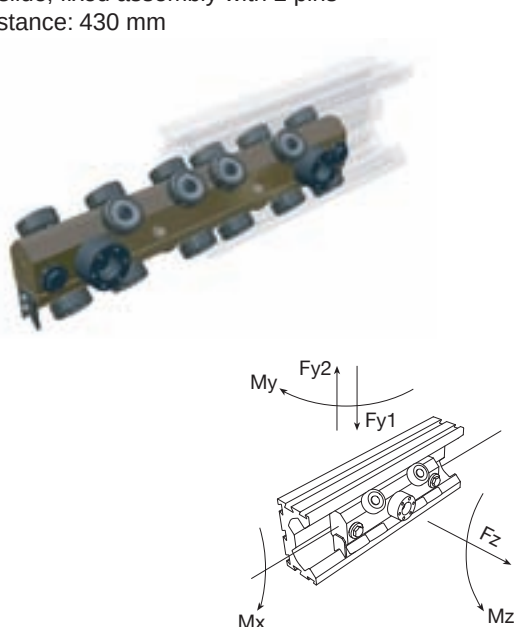

	M_x [Nm]	M_y [Nm]	M_z [Nm]	F_{y1} [N]	F_{y2} [N]	F_z [N]
SYS2	700	820	705	6320	6320	6320


Specifications

Support pins no.	2
Adjusting bushings no.	2
Rollers no.	20

Rail connecting plate

Code 336.0803


N.B.: please ask for the specific rail machining.

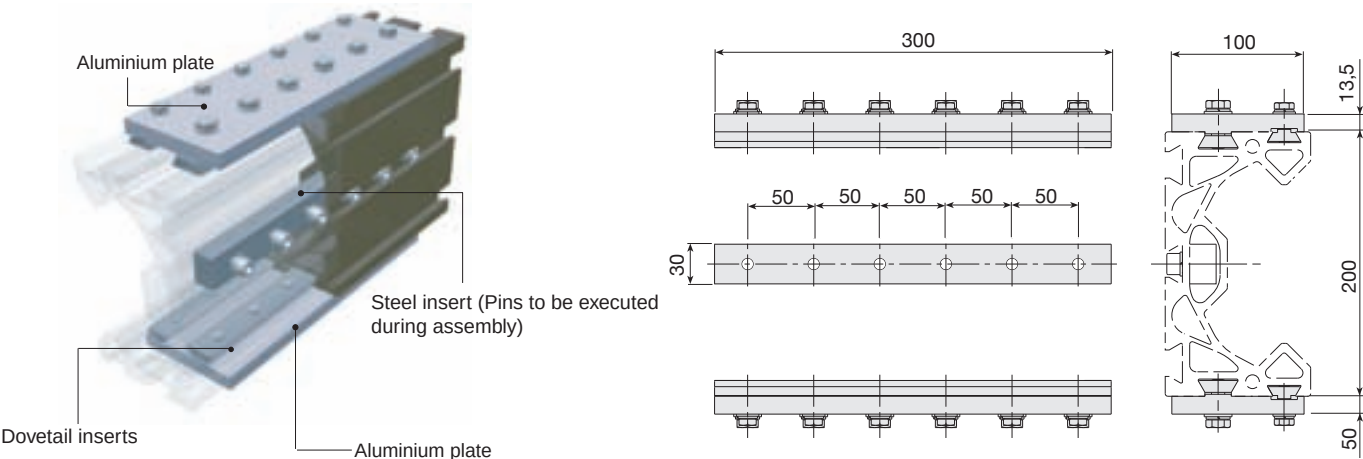

Roller slide guard profile

Code 335.0805/L


Material: aluminium alloy profile.

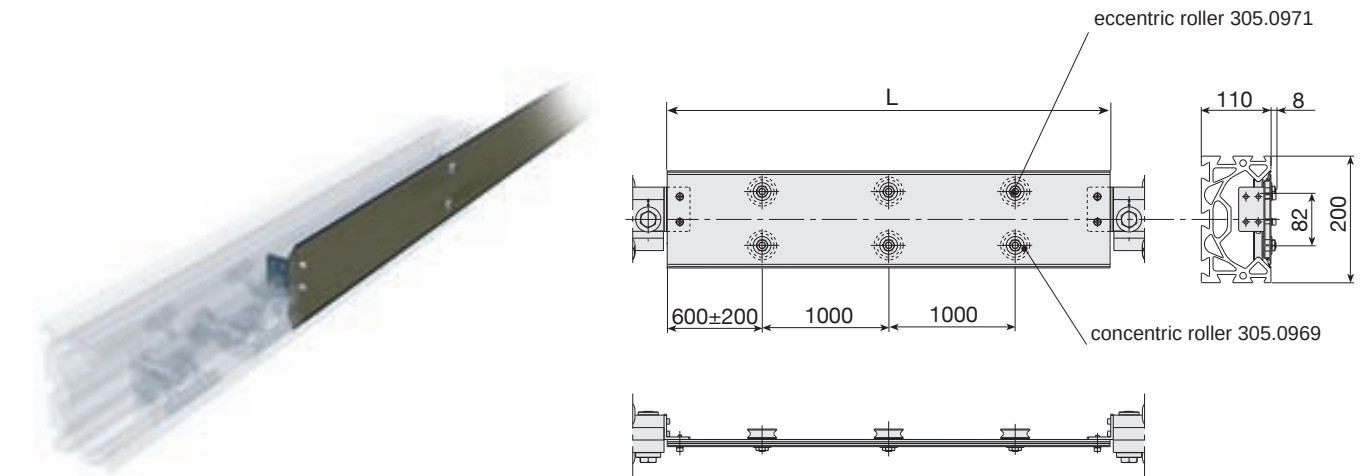

Accessory fixing plate



Code 336.0810

Material: bronze anodised 6082 aluminium alloy.

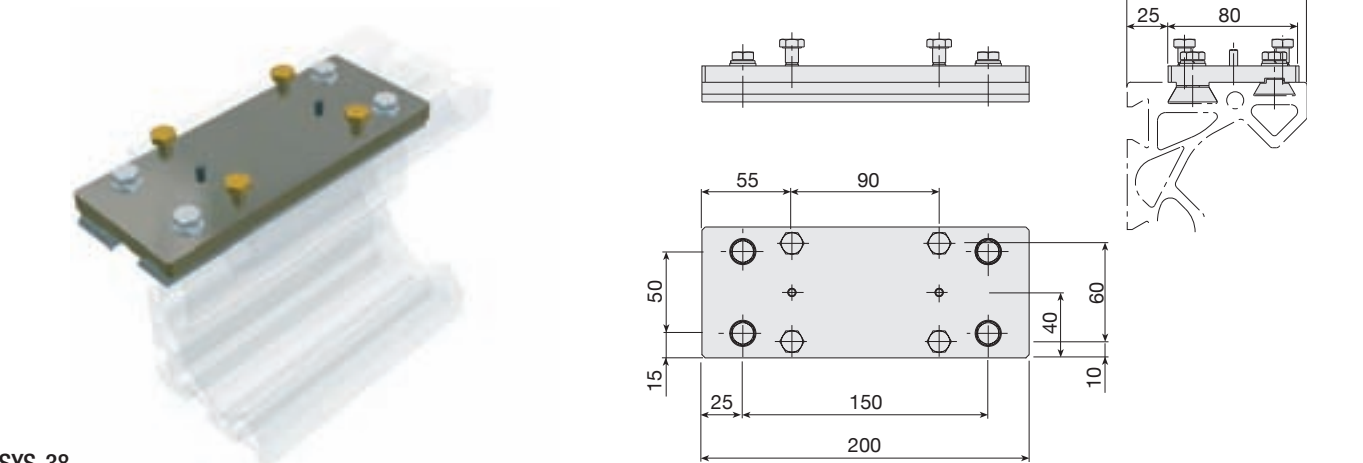


Code 213.1100

Material: aluminium alloy extrusion.

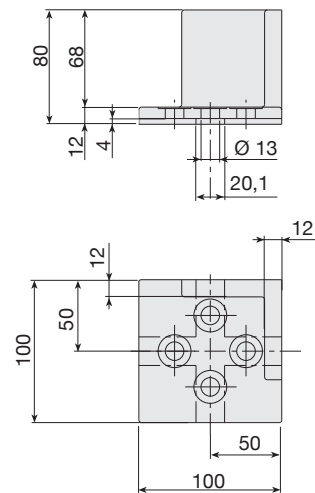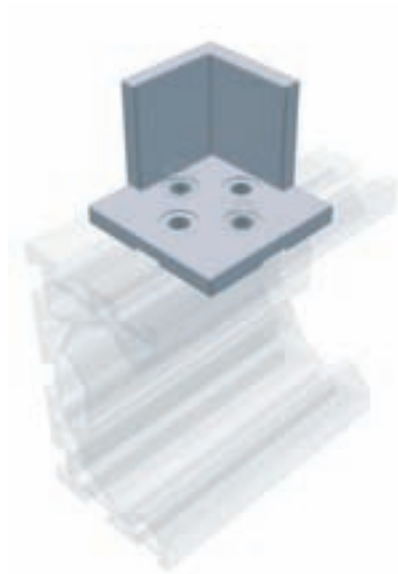

Ø78 V-shaped rollers

Material: high-resistance black polyamide coating.
Eccentric or concentric blued steel pin.

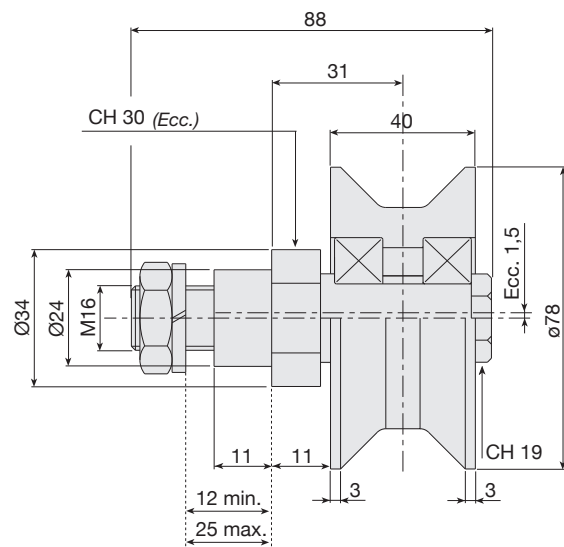

Type	Weight [kg]	PR [N]	PA [N]	Speed [m/s]	Code
Ecc.	0,6	500	130	2	305.1037
Conc.	0,6	500	130	2	305.1036

Code Parts Index

Code	pag.	Code	pag.	Code	pag.	Code	pag.	Code	pag.	Code	pag.
1010732	23	3040293	16	3040717	10	3150002	20	3020714		AC31-30	23
2090467	23	3040297	16	3040718	11	3150003	20	SYS1-P	8	AC31-40	23
2091202	23	3040299	16	3040719	11	3150004	20	3350805/L	38	AC31-50	23
2111061	23	3040303	16	3040720	12	3150005	20	A20-60	29	AC31-60	23
2111077	24	3040305	16	3040726	16	3150185	20	A20-60	29	AC31-90	23
2111617	29	3040323	16	3040727	16	3150578	20	A20-90	29	B20-60	29
2112349	21	3040325	16	3040728	16	3150583	20	A24-00	29	B20-90	29
2112349	21	3040341	16	3040729	16	3150655	15	A24-00	29	B24-00	29
2112351	21	3040343	16	3040734	16	3150656	15	A30-00	26	B30-10	26
2112351	21	3040349	16	3040735	16	3150657	15	A30-02	27	B30-20	26
2112363	21	3040351	16	3040833	36	3150658	15	A30-10	26	B30-53	26
2112363	21	3040357	16	3040837	11	3150659	14	A30-20	26	B30-54	26
2112366	21	3040359	16	3040866	11	3150659	14	A30-54	26	B30-55	26
2112366	21	3040363	16	3040902	37	3150660	14	A30-55	26	B30-56	26
2112367	21	3040365	16	3040911	37	3150660	14	A30-56	26	B30-63	26
2112367	21	3040383	16	3041017	18	3150661	14	A30-64	26	B30-64	26
2112423	21	3040385	16	3050730	17	3150661	14	A30-65	26	B30-65	26
2112424	21	3040401	16	3050731	17	3150662	14	A30-66	26	B30-66	26
2112425	21	3040403	16	3050732	17	3150662	14	A30-76	26	B32-30	24
2112426	21	3040409	16	3050733	17	3150713	19	A30-86	26	B32-40	24
2112427	21	3040411	16	3050747	17	3150724	19	A32-40	23	B32-50	24
2112428	21	3040417	16	3050748	17	3150882	19	A32-50	23	B32-55	24
2112429	21	3040419	16	3050951	12	3151031	15	A32-55	23	B32-60	24
2112429	21	3040423	16	3050958	12	3151032	15	A32-55	23	B32-65	24
2130756	26	3040425	16	3051036	39	3360003	31	A32-60	23	B32-67	24
2131100	39	3040476	16	3051037	39	3360004	31	A32-61	24	B32-85	24
2150006	21	3040601	16	3051570	17	3360005	31	A32-65	23	B33-21	25
2150007	21	3040602	16	3051571	17	3360007	30	A32-65	24	B33-26	25
2152137	20	3040607	16	3120158	28	3360188	19	A32-67	23	B33-28	25
2152368	20	3040608	16	3120159	28	3360198	19	A32-67	23	B35-15	25
3020147	30	3040609	16	3120679	28	3360597	28	A32-80	23	B35-20	25
3020539	35	3040610	16	3120680	28	3360666	20	A32-81	24	B35-30	25
3040001	36	3040611	16	3120846	28	3360701	13	A32-82	24	B35-40	25
3040203	16	3040612	16	3120935	30	3360702	13	A32-83	24	BD31-10	25
3040205	16	3040617	16	3121026	30	3360707	13	A32-84	24	BD31-30	25
3040221	16	3040618	16	3121572	19	3360708	13	A32-85	23	BD31-50	25
3040223	16	3040623	16	3130884	30	3360709	13	A32-85	23	BD31-60	25
3040225	16	3040624	16	3130885	30	3360710	13	A32-86	24	BD31-90	25
3040229	16	3040625	16	3140164	22	3360738	13	A32-87	24	C30-00	26
3040231	16	3040626	16	3140166	22	3360739	13	A32-89	24	C30-02	27
3040233	16	3040627	16	3140169	22	3360803	38	A33-20	25	SYS1-G	
3040237	16	3040628	16	3140170	22	3360810	38	A33-26	25	3020001	8
3040239	16	3040633	16	3140172	22	3360879	19	A33-28	25	SYS1-H	
3040243	16	3040636	16	3140175	22	3361001	12	A35-20	24	3020552	9
3040245	16	3040637	16	3140179	22	3361002	12	A35-25	24	SYS1-M	
3040263	16	3040638	16	3140180	22	3361069	28	A35-30	24	3020113	8
3040265	16	3040641	16	3140181	22	3020001		A35-40	24	SYS1-P	
3040281	16	3040644	16	3140182	22	SYS1-G	8	A35-60	24	3020714	8
3040283	16	3040645	16	3140841	22	3020113		A39-10	27		
3040285	16	3040646	16	3140932	22	SYS1-M	8	A39-10 ALU	27		
3040289	16	3040667	18	3140933	22	3020552		A39-25/5000	27		
3040291	16	3040716	10	3150001	20	SYS1-H	9	A39-25/6000	27		



ROLLON S.p.A. - ITALY



Via Trieste 26
I-20871 Vimercate (MB)
Phone: (+39) 039 62 59 1
www.rollon.it - infocom@rollon.it

● Rollon Branches & Rep. Offices
● Distributors

Branches:

ROLLON GmbH - GERMANY



Bonner Strasse 317-319
D-40589 Düsseldorf
Phone: (+49) 211 95 747 0
www.rollon.de - info@rollon.de

ROLLON B.V. - NETHERLANDS



Ringbaan Zuid 8
6905 DB Zevenaar
Phone: (+31) 316 581 999
www.rollon.nl - info@rollon.nl

Rep. Offices:

ROLLON S.p.A. - RUSSIA



117105, Moscow, Varshavskoye
shosse 17, building 1, office 207.
Phone: +7 (495) 508-10-70
www.rollon.ru - info.russia@rollon.com

ROLLON S.A.R.L. - FRANCE



Les Jardins d'Eole, 2 allée des Séquoias
F-69760 Limonest
Phone: (+33) (0) 4 74 71 93 30
www.rollon.fr - infocom@rollon.fr

ROLLON Corporation - USA



101 Bilby Road. Suite B
Hackettstown, NJ 07840
Phone: (+1) 973 300 5492
www.rolloncorp.com - info@rolloncorp.com

Regional Manager:

ROLLON - SOUTH AMERICA



R. Joaquim Floriano, 397, 2o. andar
Itaim Bibi - 04534-011, São Paulo, BRASIL
Phone: +55 (11) 3198 3645
www.rollonbrasil.com.br - info@rollonbrasil.com

ROLLON Ltd - CHINA



51/F Raffles City, 268 Xi Zang Middle Road,
200001 Shanghai (China)
Phone: (+86) 021 2312 7582
www.rollon.cn.com - info@rollon.cn.com

ROLLON India Pvt. Ltd. - INDIA



1st floor, Regus Gem Business Centre, 26/1
Hosur Road, Bommanahalli, Bangalore 560068
Phone: (+91) 80 67027066
www.rollonindia.in - info@rollonindia.in

Consult the other ranges of products



All addresses of our global sales partners can also be found at www.rollon.com

Distributor



屠喜(Tony) | 商务技术总监

亿登(上海)自动化技术有限公司

Eden (shanghai) Automation Technology CO., LTD

地址: 上海市闵行区陈行路2388号5号4楼401-19室 (漕河泾浦江科技广场)

Add: Room P11 Buding 5, No. 2388 Chenhang Road, MinHang district, Shanghai

手机 Mobile: (+86) 139 1826 7864

电话 Phone: 021-51029898

传真 Fax: 021-51029899

邮箱 mail: sale@edenmotion.com

网址 Web: www.edenmotion.com